



















3.3"/4.0" SQUARE ADJUSTABLE DOWNLIGHT
TRIM




THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS		
RMD - REMODEL		
		
LED INSERT	CEILING PLATE	DRIVER ENCLOSURE
NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)		
		
LED INSERT	NEW CONSTRUCTION FRAME	BAR HANGERS
SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)		
		
LED INSERT	SHALLOW HOUSING	BAR HANGERS
NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)		
		
LED INSERT	NEW CONSTRUCTION HOUSING	BAR HANGERS (OPTIONAL)

7<BTRUCTION KEY	INFORMAT7=<
 ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUC TION MAY VOID THE WARRANTY DO NOT TOUCH LEADS. LEADS MUST BE PROTECTED FROM MECHANICAL L STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING
 ATTENTION	
 POWER ON	
 POWER OFF	


RMD - REMODEL

1

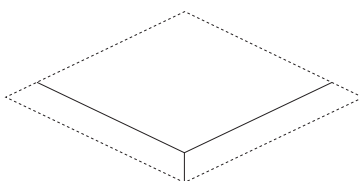

FIXTURE TYPE	CEILING HOLE SIZE
DL33SA	3.9375" x 3.9375"
DL40SA	4.6875" x 4.6875"


2

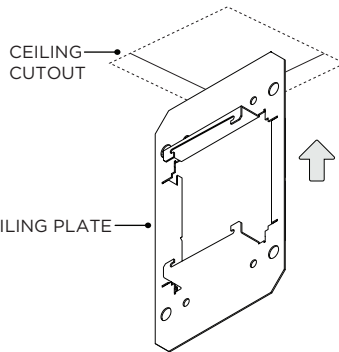

CEILING CUTOUT

CEILING PLATE


3

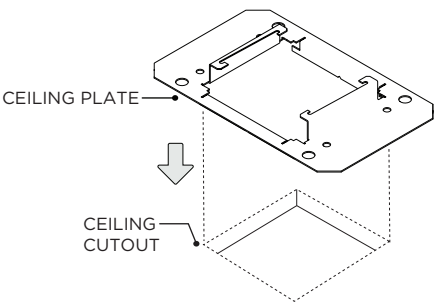

CEILING PLATE

CEILING CUTOUT

4

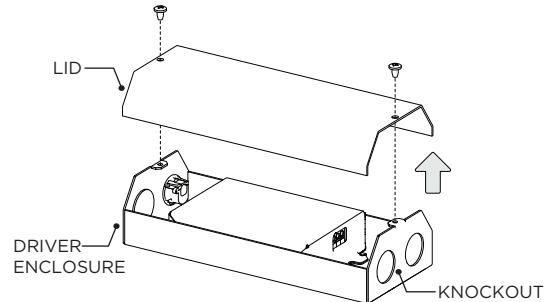


LID

DRIVER ENCLOSURE

KNOCKOUT

REMOVE LID AND KNOCKOUT FROM DRIVER ENCLOSURE

5

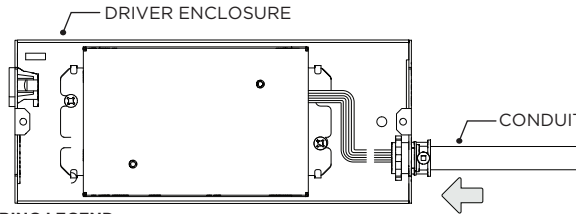

DRIVER ENCLOSURE


CONDUIT

WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

CONNECT CONDUIT TO DRIVER ENCLOSURE AND MAKE WIRING CONNECTIONS

6

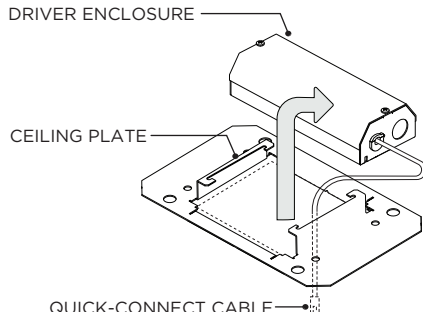


DRIVER ENCLOSURE

CEILING PLATE

QUICK-CONNECT CABLE

SECURE LID ONTO DRIVER ENCLOSURE AND PLACE ABOVE CEILING

7

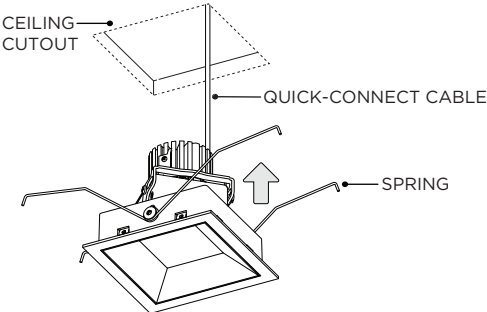


CEILING CUTOUT

QUICK-CONNECT CABLE

SPRING

INSERT LED ASSEMBLY INTO CEILING


7A

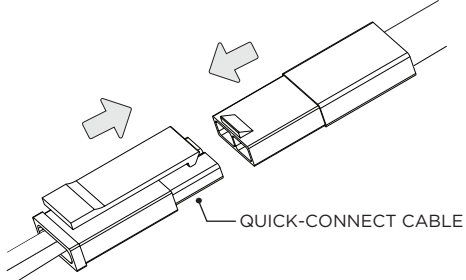

QUICK-CONNECT CABLE

CONNECT QUICK-CONNECT CABLE TO LED ASSEMBLY

7B









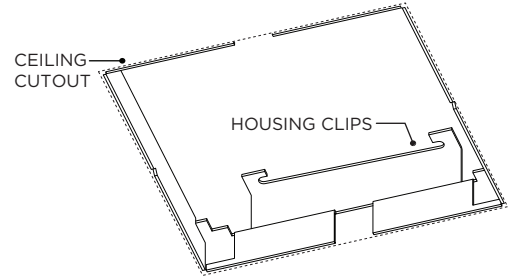


CEILING CUTOUT


HOUSING CLIPS

ENGAGE SPRINGS TO HOUSING CLIPS TO SECURE LED INSERT INTO CEILING

NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)

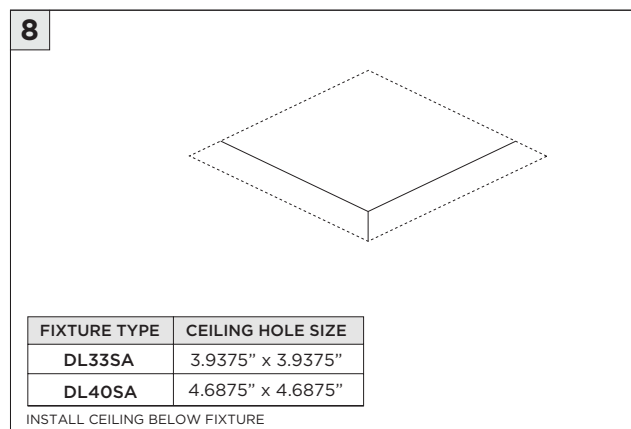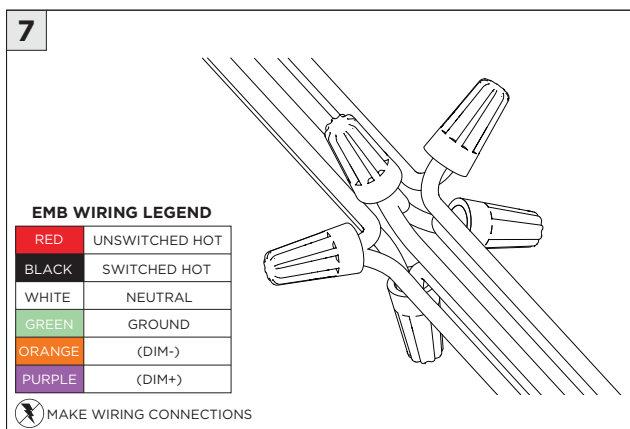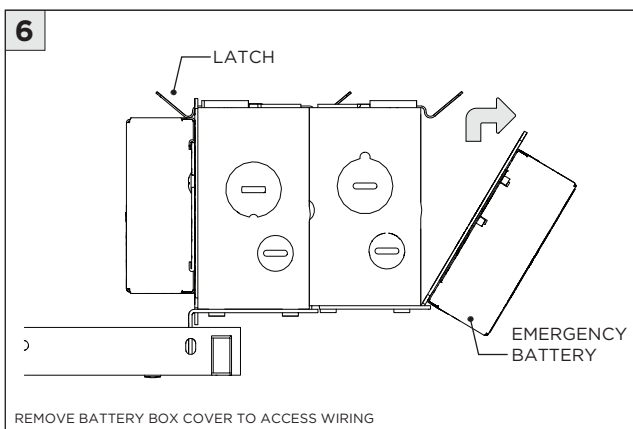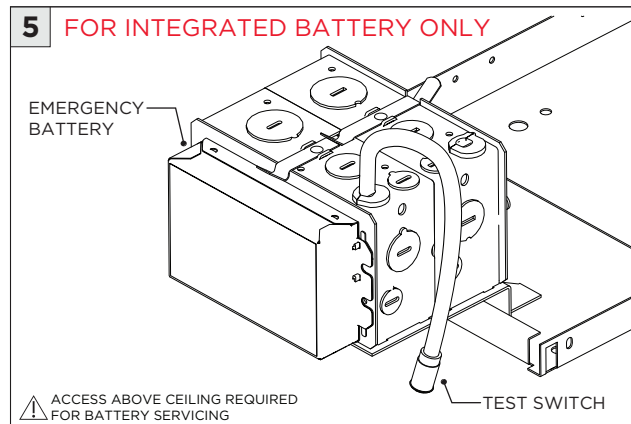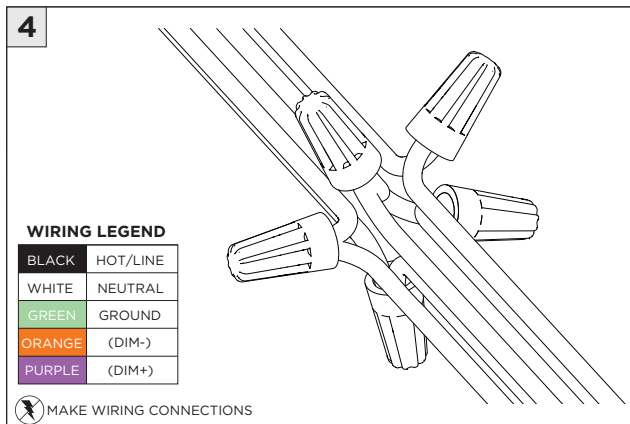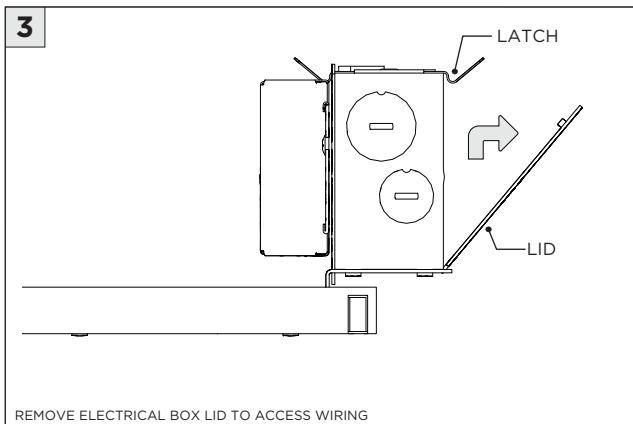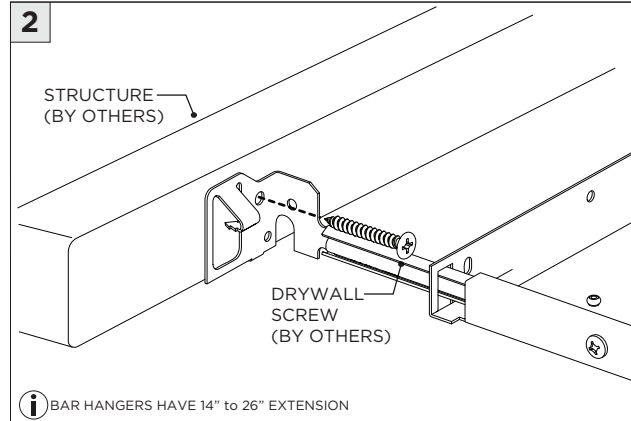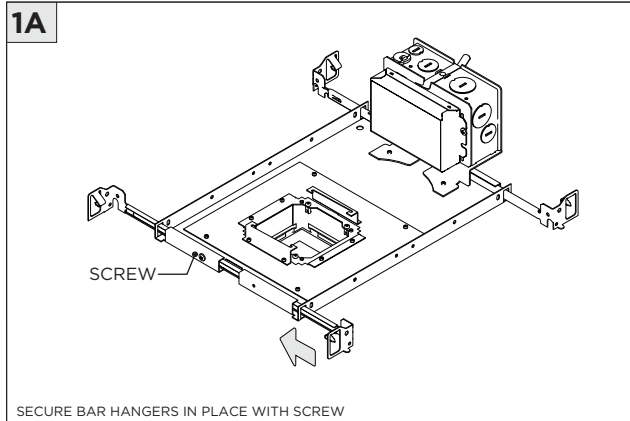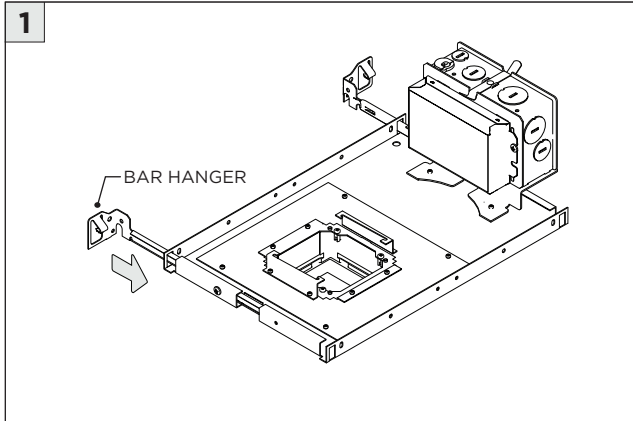


9

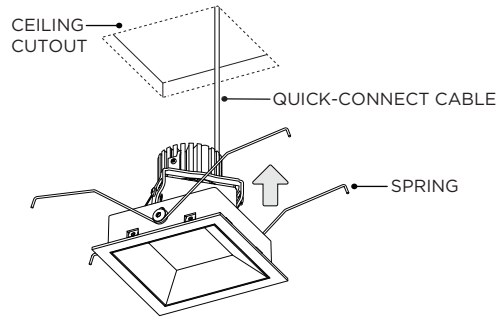


INSERT LED ASSEMBLY INTO CEILING

9A

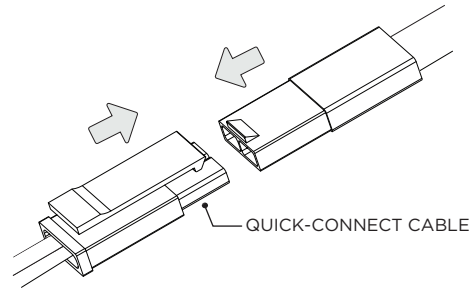

CONNECT QUICK-CONNECT CABLE TO LED ASSEMBLY


9B

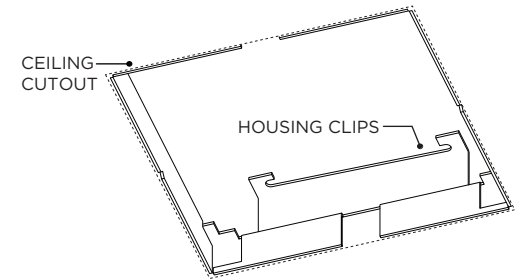


ENGAGE SPRINGS TO HOUSING CLIPS TO SECURE LED INSERT INTO CEILING

NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)


1 BAR HANGER INSTALLATION
(IF SUPPLIED BY 3G)

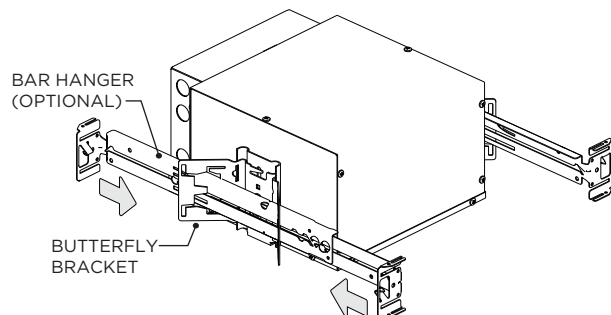


1A

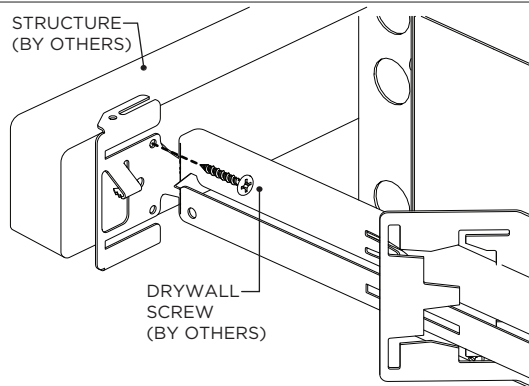

2 OTHER BAR HANGER INSTALLATION
(NOT PROVIDED BY 3G)

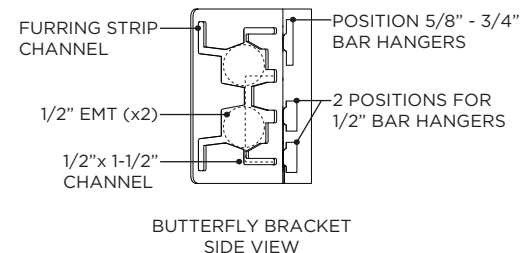


3

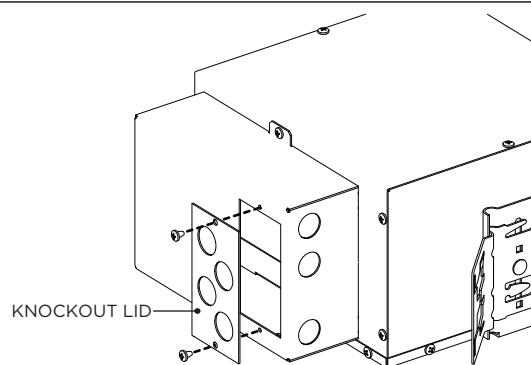


REMOVE ELECTRICAL BOX KNOCKOUT LID TO ACCESS WIRING

3A

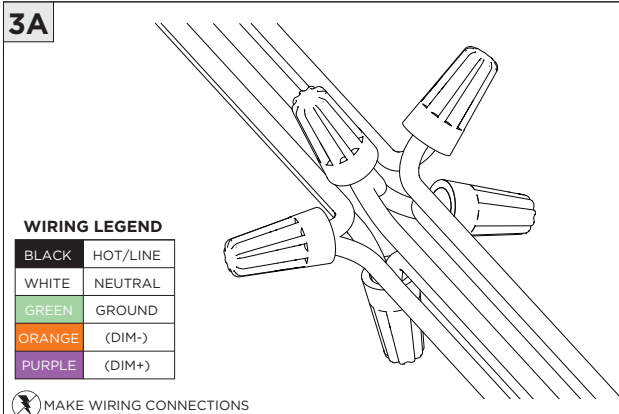


4

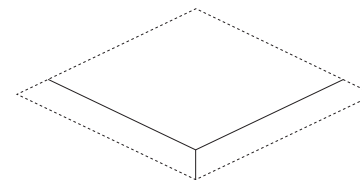

FIXTURE TYPE	CEILING HOLE SIZE
DL33SA	3.9375" x 3.9375"
DL40SA	4.6875" x 4.6875"


INSTALL CEILING BELOW FIXTURE

5

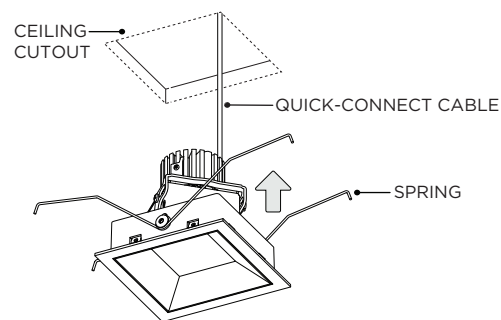


INSERT LED ASSEMBLY INTO CEILING

5A

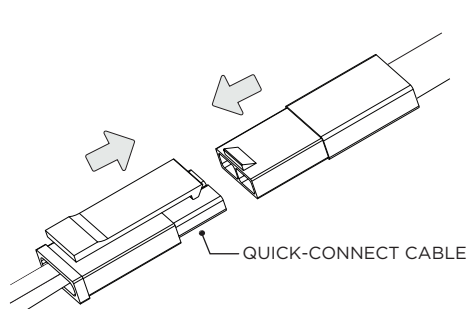










CONNECT QUICK-CONNECT CABLE TO LED ASSEMBLY

5B

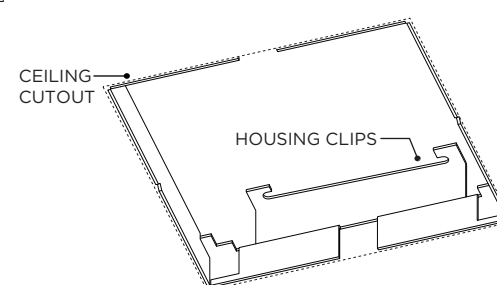


ENGAGE SPRINGS TO HOUSING CLIPS TO SECURE LED INSERT INTO CEILING

SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)

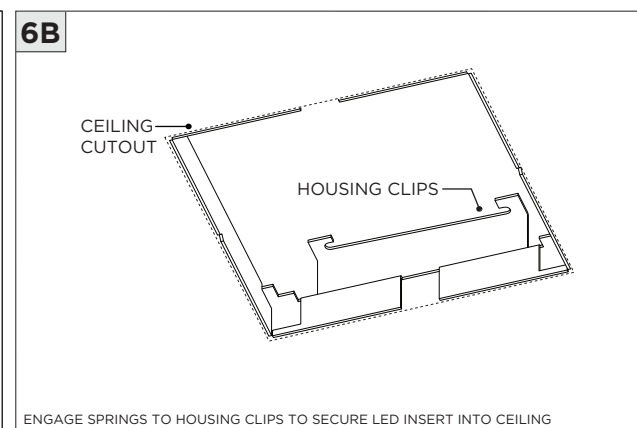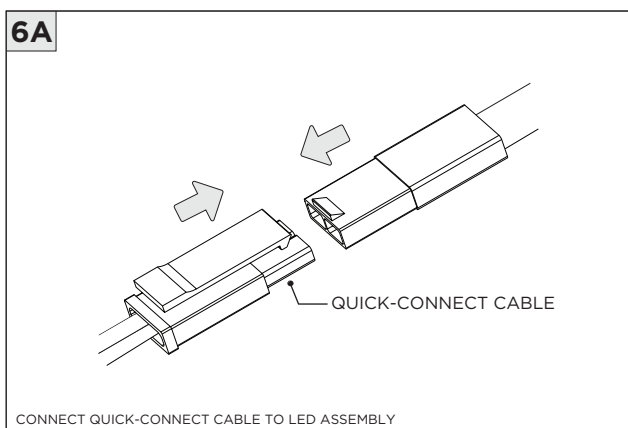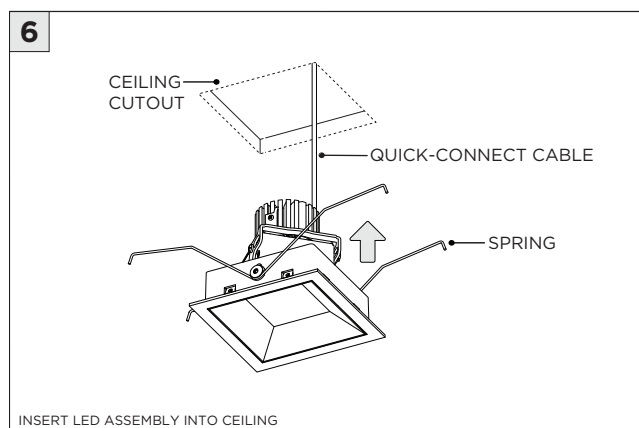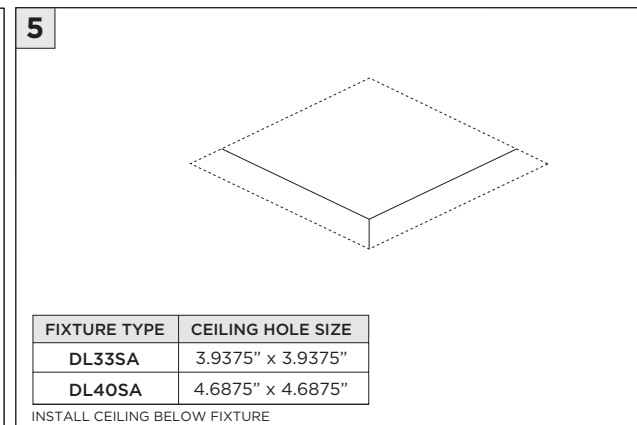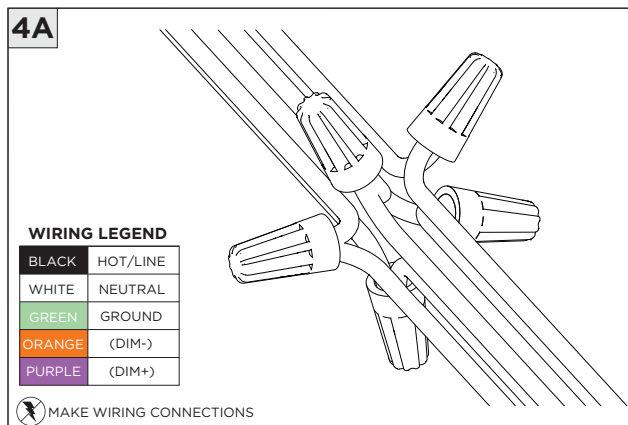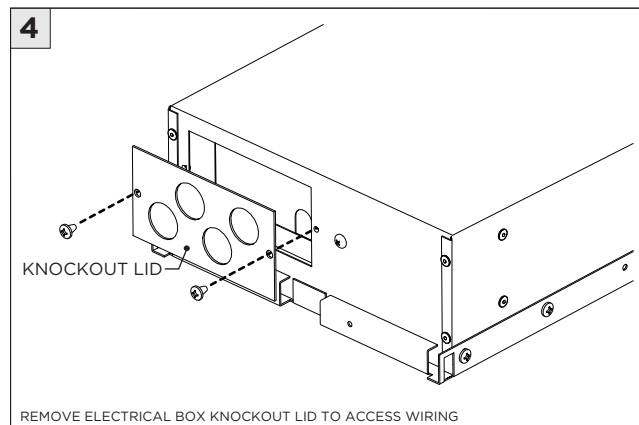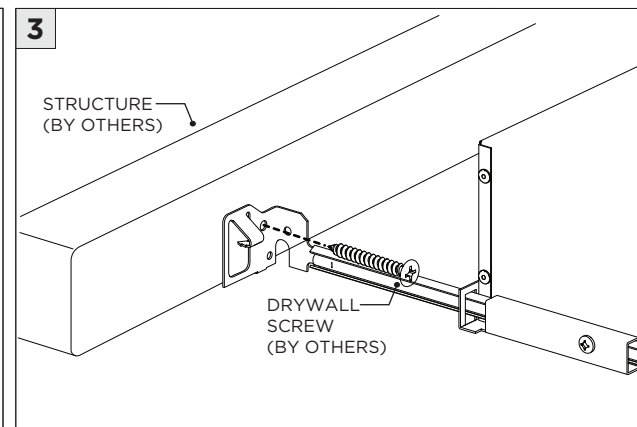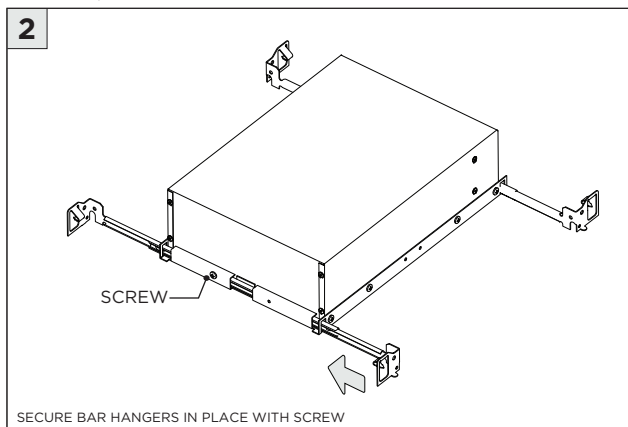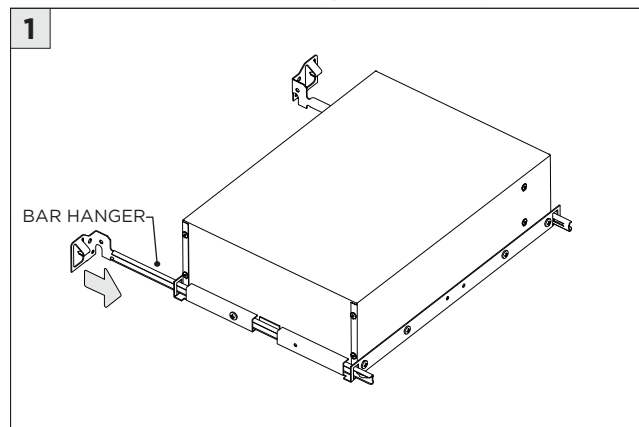


LED ADJUSTMENT

1

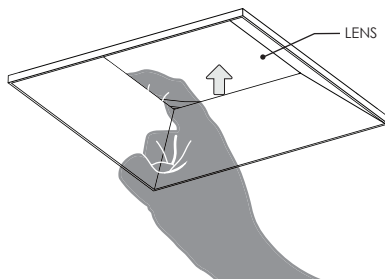


LIFT LENS AND DETATCH INSERT FROM ADAPTER RING

1A

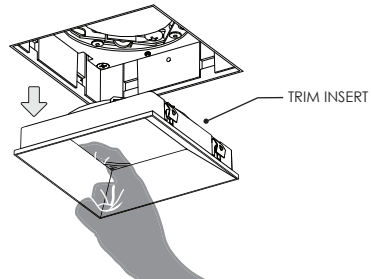

2


ANGLE ADJUSTMENT

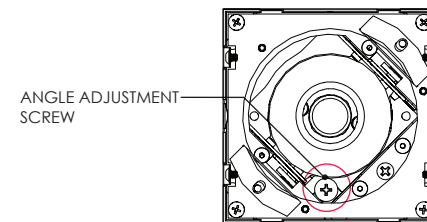

BOTTOM VIEW


TURN SCREW TO ADJUST LED ANGLE

2A

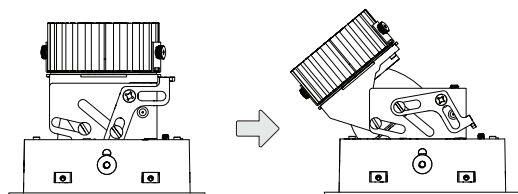

3

ROTATION ADJUSTMENT




BOTTOM VIEW

LOOSEN SCREW TO UNLOCK LED ASSEMBLY ROTATION


LED SERVICING

1

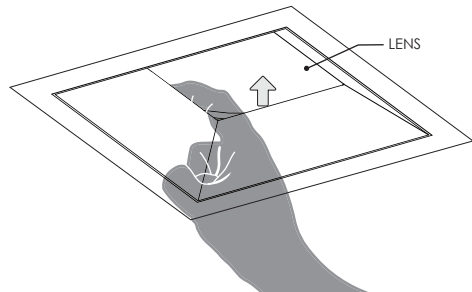


LIFT LENS AND DETATCH INSERT FROM ADAPTER RING

1A

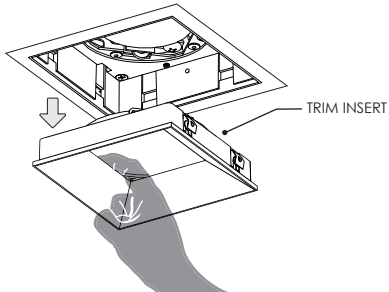


2




REMOVE 4 SCREWS TO DETATCH LED ASSEMBLY FROM CEILING

2A

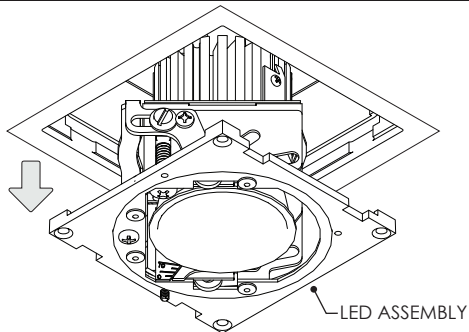


3

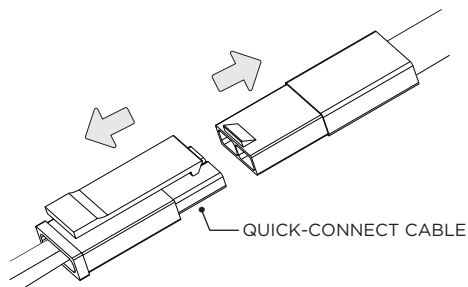


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

4

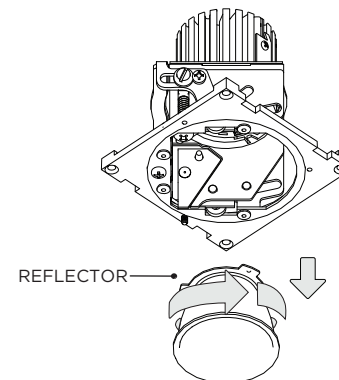


TWIST REFLECTOR TO REMOVE

5

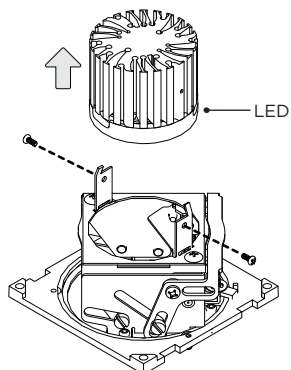


DRIVER SERVICING

1 RMD - REMODEL

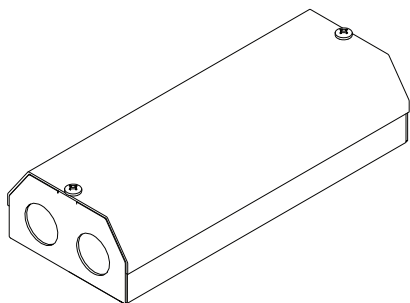


DISCONNECT POWER BEFORE SERVICING

2

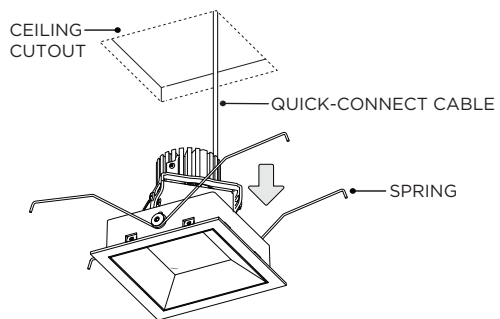


REMOVE LED ASSEMBLY FROM CEILING

2A

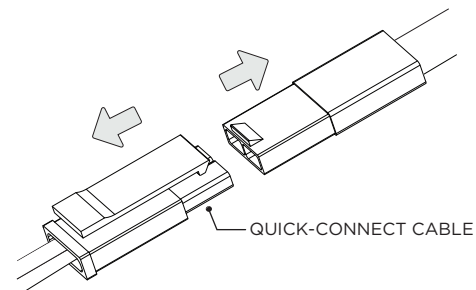


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

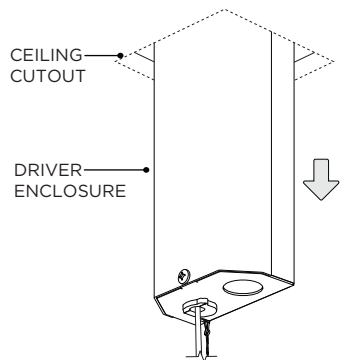


4

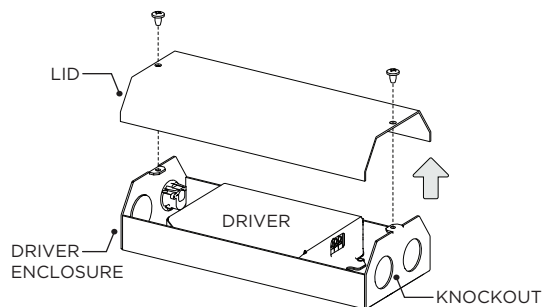


DRIVER SERVICING

1 NCF - NEW CONSTRUCTION FRAME

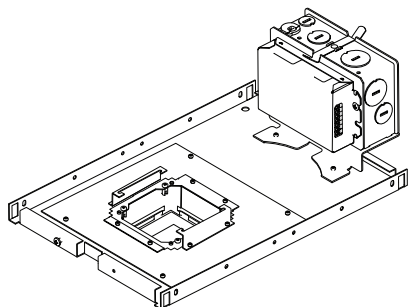


⚡ DISCONNECT POWER BEFORE SERVICING

2

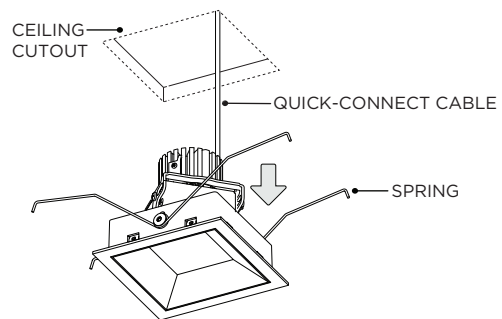


REMOVE LED ASSEMBLY FROM CEILING

2A

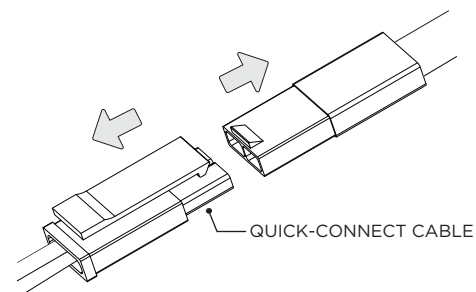


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY


3

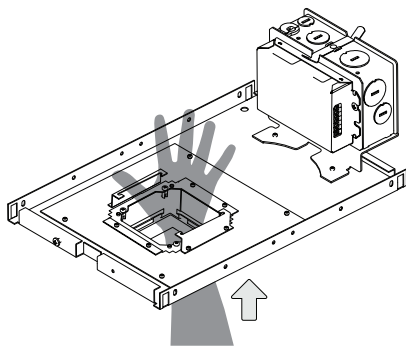


4

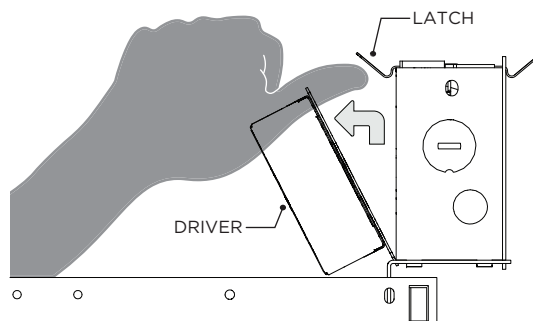

5

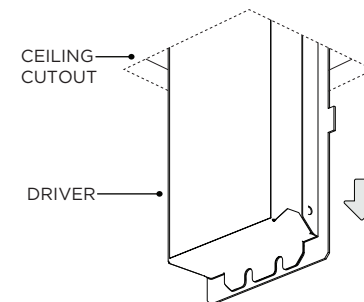


5A

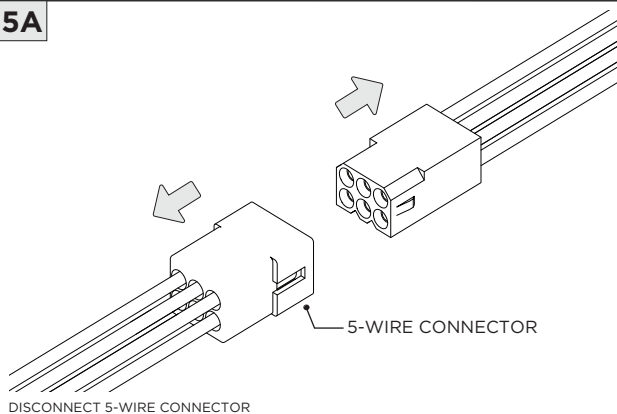

DISCONNECT 5-WIRE CONNECTOR


6 NCF - NEW CONSTRUCTION FRAME
FOR INTEGRATED BATTERY ONLY

⚡ THIS UNIT UTILIZES MORE THAN ONE
POWER SOURCE
⚡ DISCONNECT ALL POWER SOURCES
BEFORE SERVICING

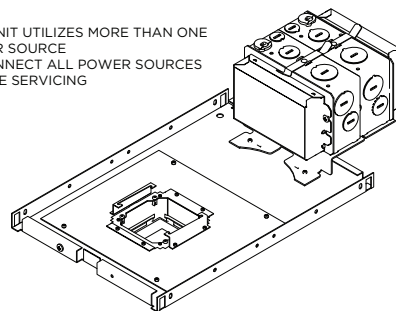

ⓘ ACCESS ABOVE CEILING REQUIRED FOR DRIVER SERVICING


7

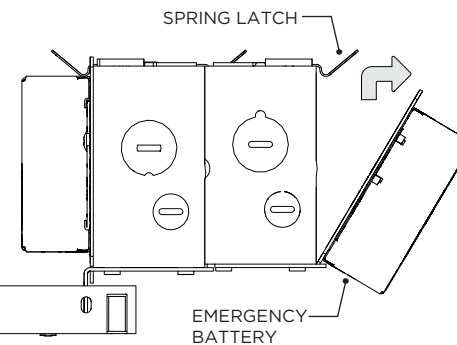

REMOVE BATTERY BOX COVER TO ACCESS WIRING


DRIVER SERVICING

1 SH - SHALLOW HOUSING

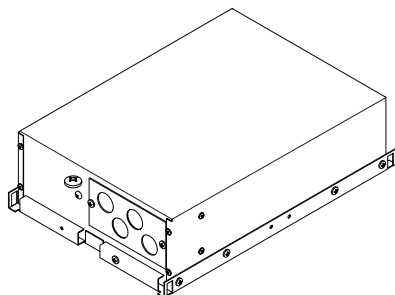


⚡ DISCONNECT POWER BEFORE SERVICING

2

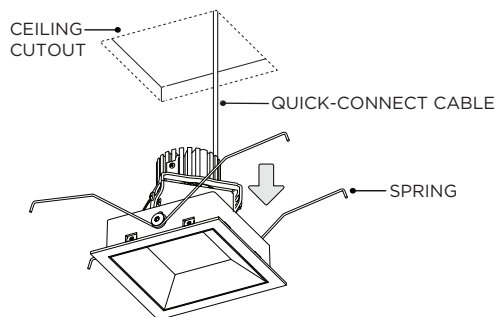


REMOVE LED ASSEMBLY FROM CEILING

2A

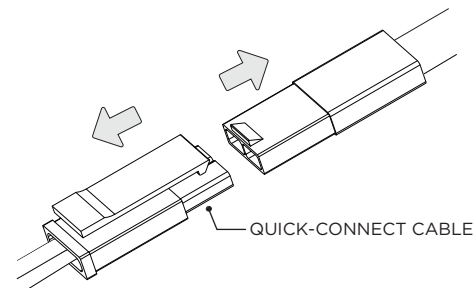


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

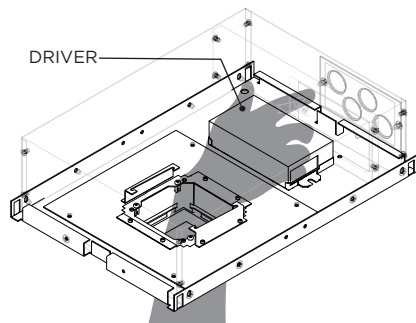


REMOVE DRIVER - SECURED WITH HOOK-AND-LOOP FASTENER

4

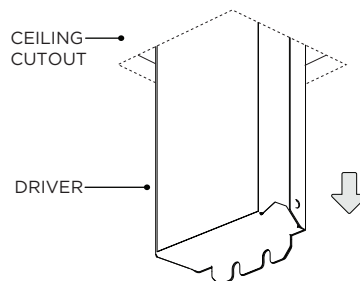


4A

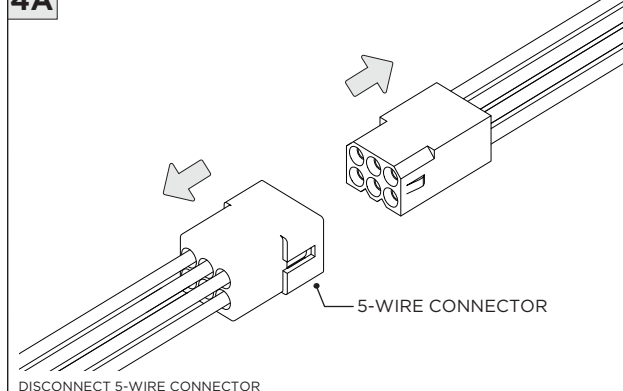

DISCONNECT 5-WIRE CONNECTOR


DRIVER SERVICING

1 NC/IC - NEW CONSTRUCTION HOUSING

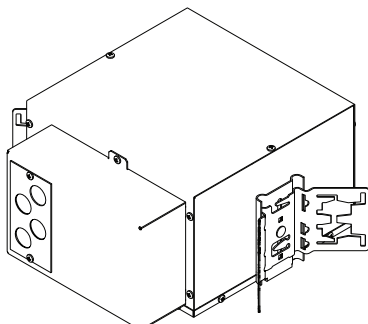


⚡ DISCONNECT POWER BEFORE SERVICING

2

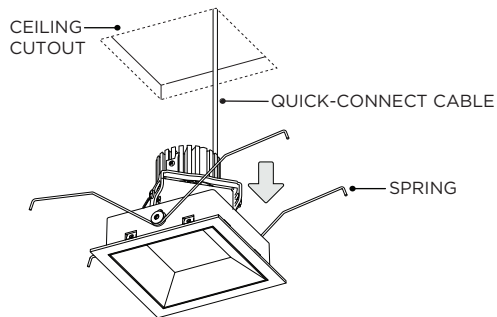

REMOVE LED ASSEMBLY FROM CEILING


2A

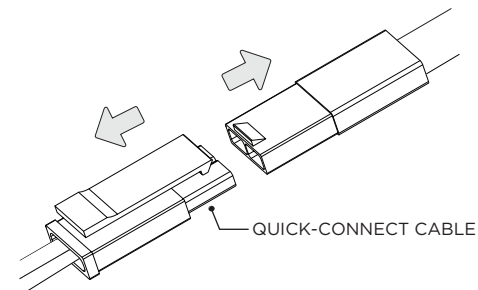


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

THUMB SCREW

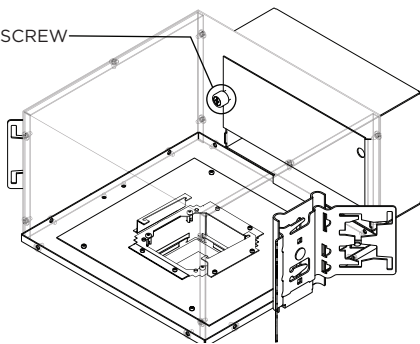


4

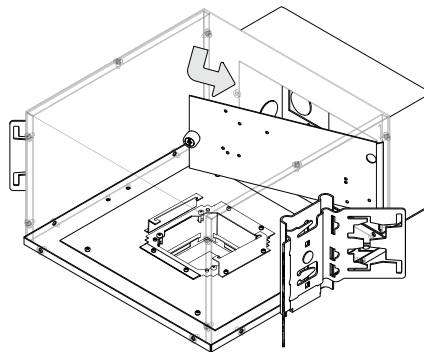

5

CEILING
CUTOUT

DRIVER

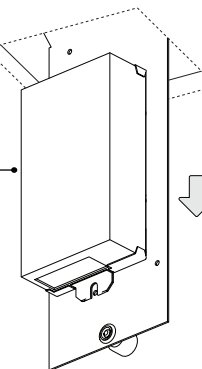

5A



5-WIRE CONNECTOR

DISCONNECT 5-WIRE CONNECTOR