














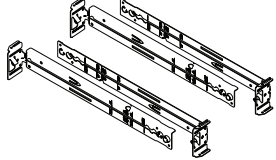


THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS			
<b>RMD - REMODEL</b>			
			
LED INSERT	MUDDING FLANGE	DRIVER ENCLOSURE	BLOCKING SUPPORT PLATE
<b>NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)</b>			
			
LED INSERT	MUDDING FLANGE	NEW CONSTRUCTION FRAME	BAR HANGERS
<b>SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)</b>			
			
LED INSERT	MUDDING FLANGE	SHALLOW HOUSING	BAR HANGERS
<b>NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)</b>			
			
LED INSERT	MUDDING FLANGE	NEW CONSTRUCTION HOUSING	BAR HANGERS (OPTIONAL)

INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
ℹ ATTENTION	REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
⚡ POWER ON	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
🔌 POWER OFF	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING

#### RMD - REMODEL

**1**

FIXTURE TYPE	CEILING HOLE SIZE
DL33RA	Ø 3.8125"
DL45RA	Ø 5.1250"

**2**

CEILING (BY OTHERS)

BLOCKING SUPPORT PLATE

ROTATE BLOCKING SUPPORT PLATE THROUGH CEILING CUTOUT

**3**

BLOCKING SUPPORT PLATE

CEILING CUTOUT

**4**

BLOCKING SUPPORT PLATE

MUDDING FLANGE

**i** BEFORE SECURING MUDDING FLANGE TO CEILING - ENSURE NOTCHES ON BLOCKING SUPPORT PLATE AND MUDDING FLANGE ARE ALIGNED

**5**

CEILING CUTOUT

DRYWALL SCREWS (BY OTHERS)

SECURE MUDDING FLANGE TO CEILING

**6**

BLOCKING SUPPORT

CEILING (BY OTHERS)

DRYWALL SCREWS (BY OTHERS)

SECTION VIEW

**7**

APPLY MUDDING COMPOUND (BY OTHERS) TO CEILING

**8**

LID

DRIVER ENCLOSURE

KNOCKOUT

REMOVE LID AND KNOCKOUT FROM DRIVER ENCLOSURE

**9**

DRIVER ENCLOSURE


CONDUIT

**WIRING LEGEND**

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)


**⚡** CONNECT CONDUIT TO DRIVER ENCLOSURE AND MAKE WIRING CONNECTIONS

**10**




SECURE LID ONTO DRIVER ENCLOSURE AND INSERT INTO CEILING

**10A**




INSERT DRIVER ENCLOSURE THROUGH CUTOUT AND REST ABOVE CEILING

**11**

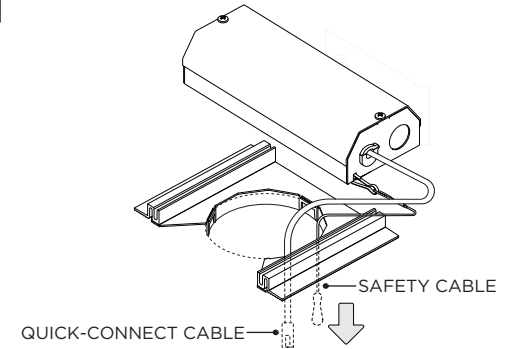


FEED SAFETY CABLE & QUICK-CONNECT CABLE THROUGH CEILING CUTOUT

**12**

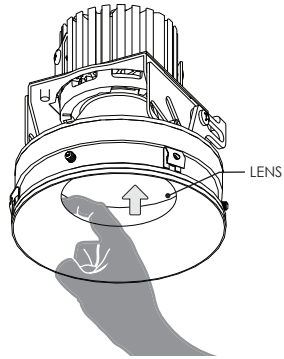


LIFT LENS AND DETACH INSERT FROM LED ASSEMBLY

**12A**

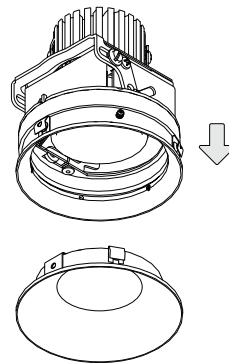


**13**

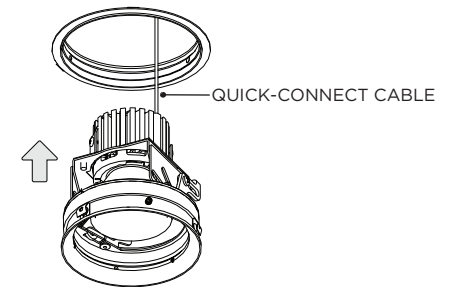


INSERT LED ASSEMBLY INTO CEILING

**13A**

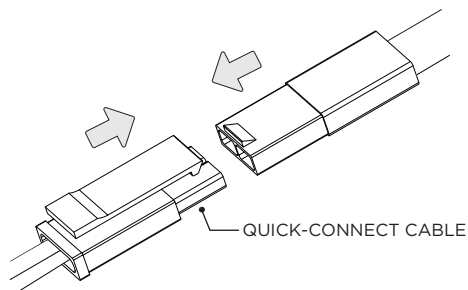


CONNECT QUICK-CONNECT CABLE TO LED ASSEMBLY

**14**

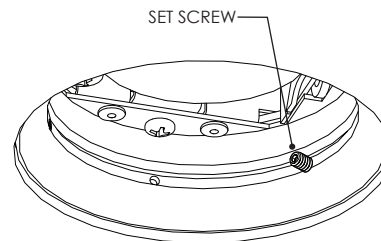










TIGHTEN 3 SET SCREWS INSIDE LED ASSEMBLY










**15**












REATTACH TRIM INSERT TO LED ASSEMBLY

**NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)**

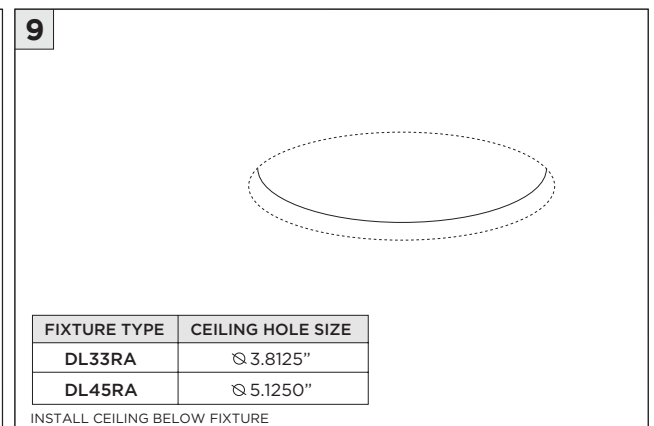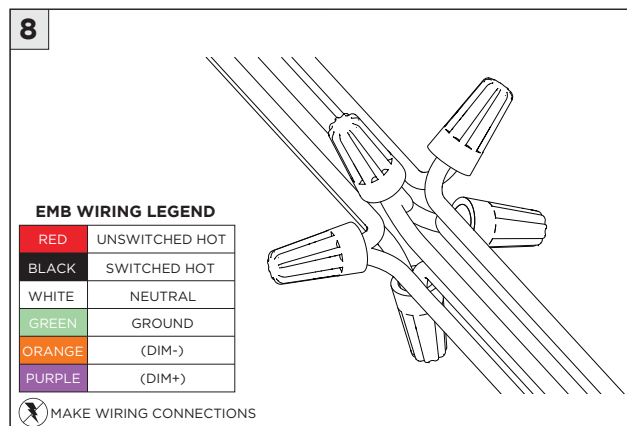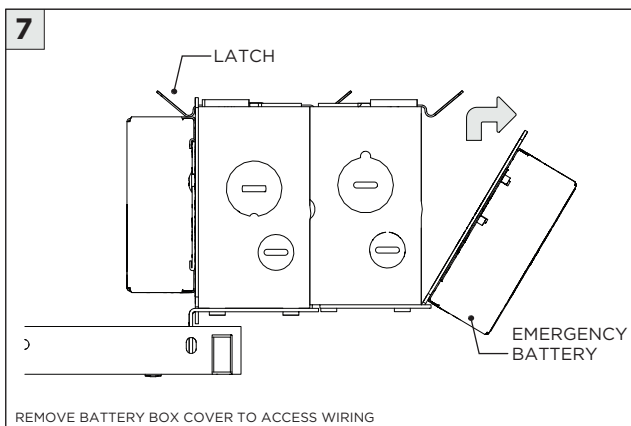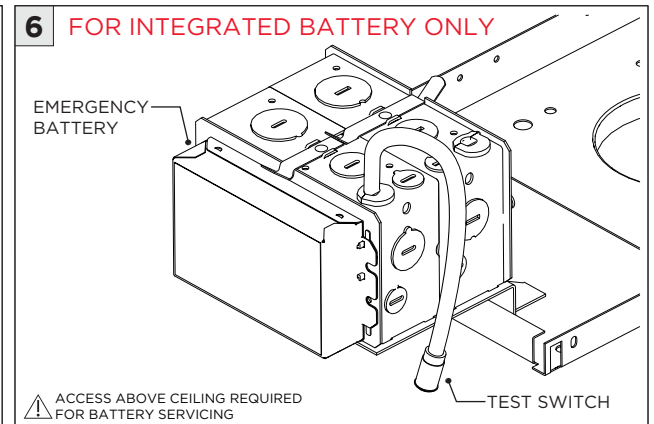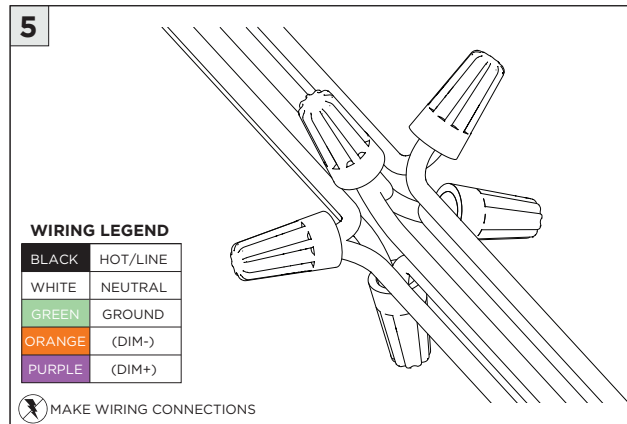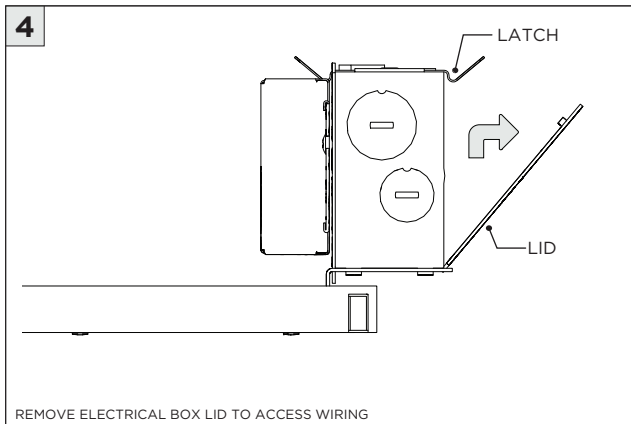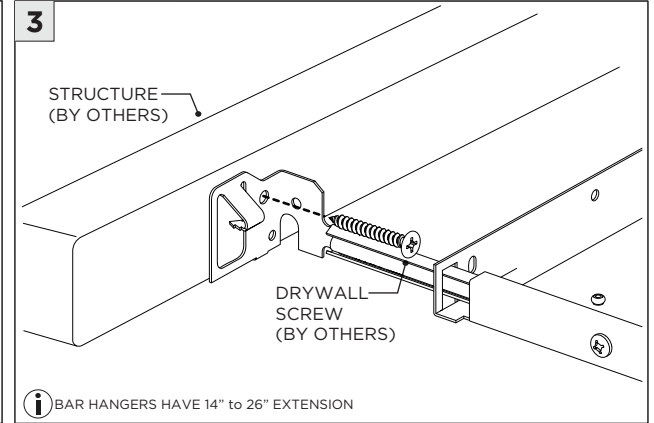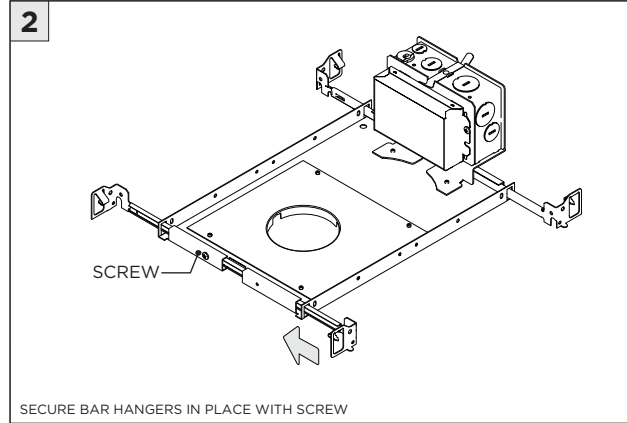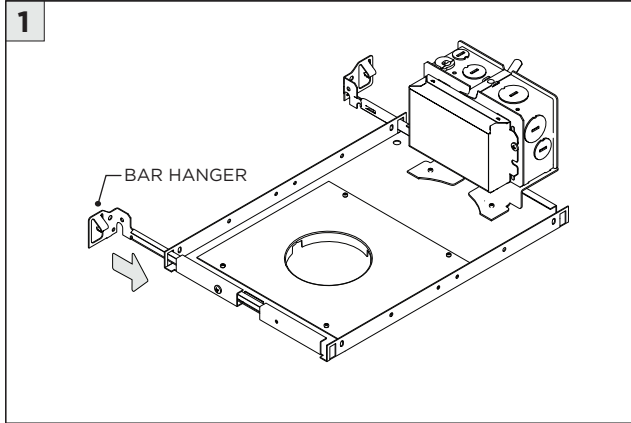


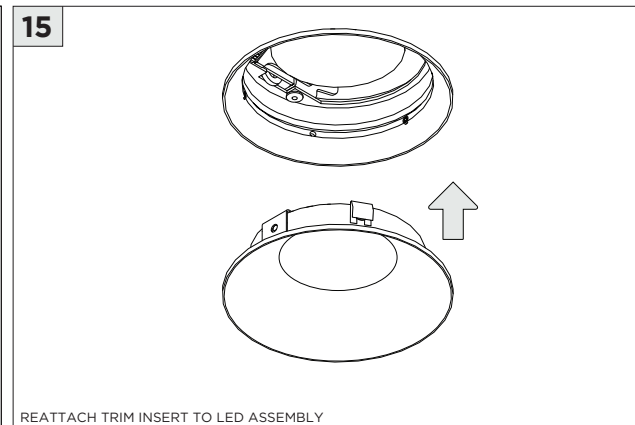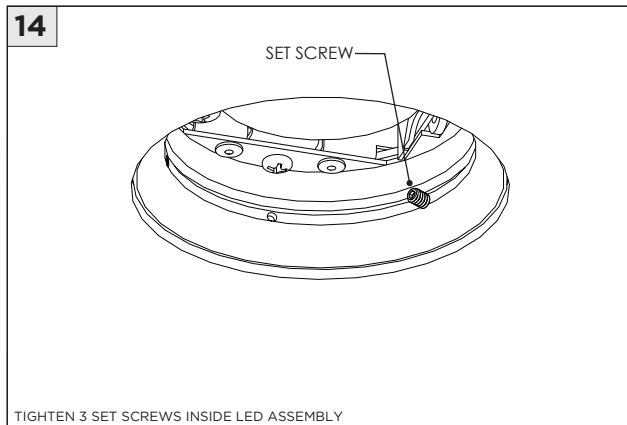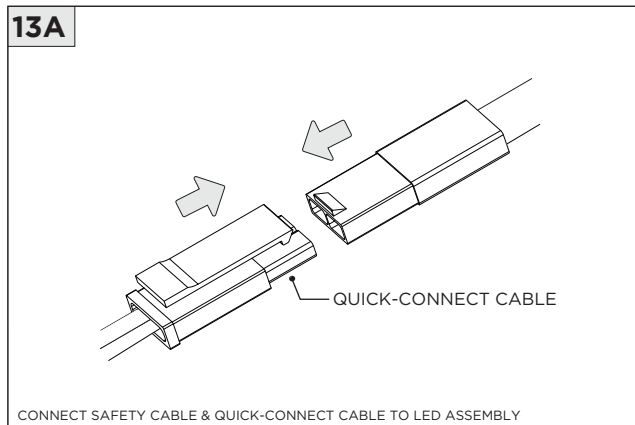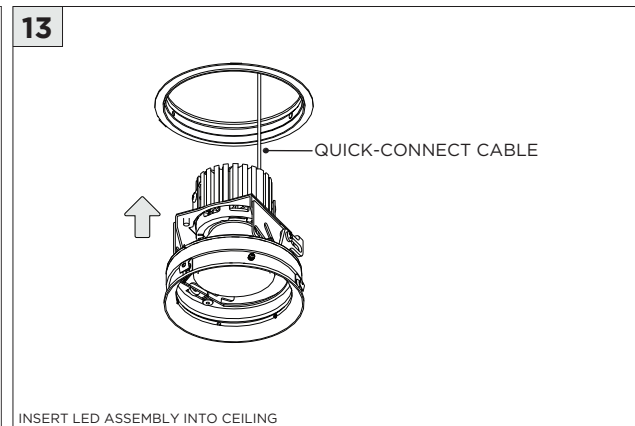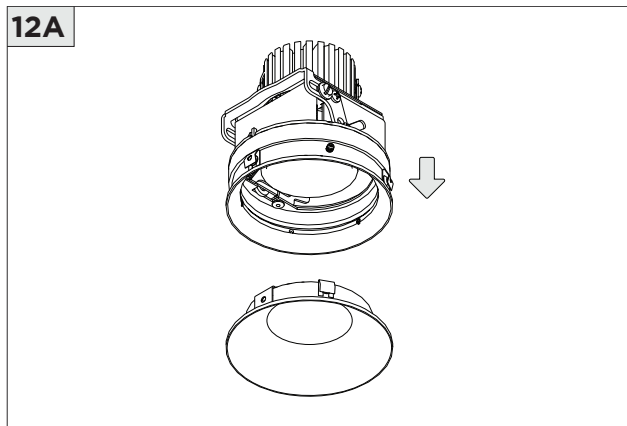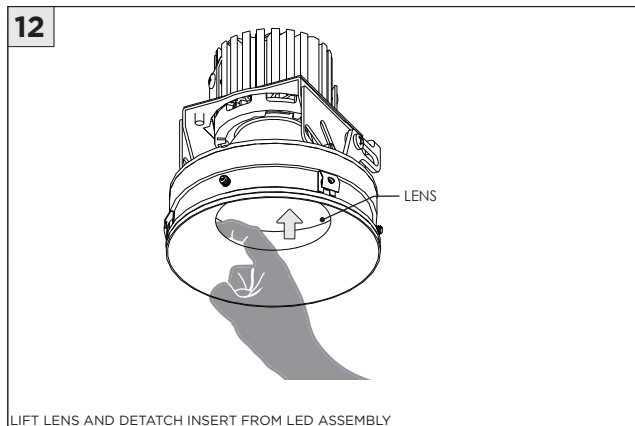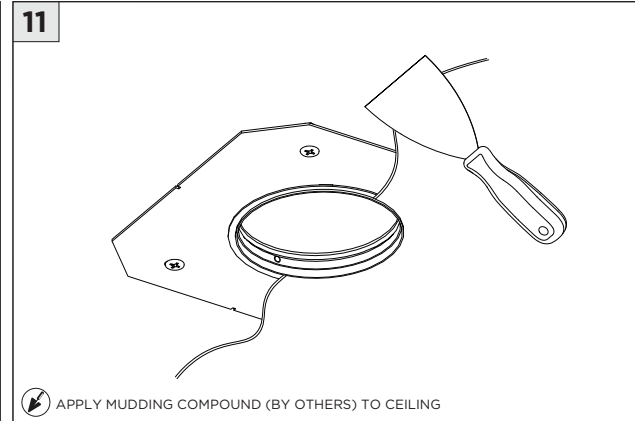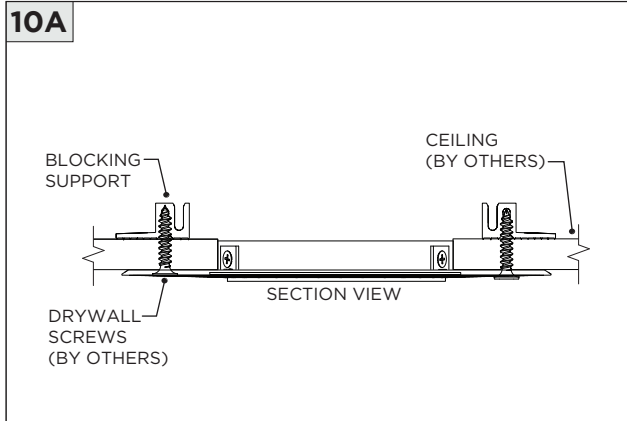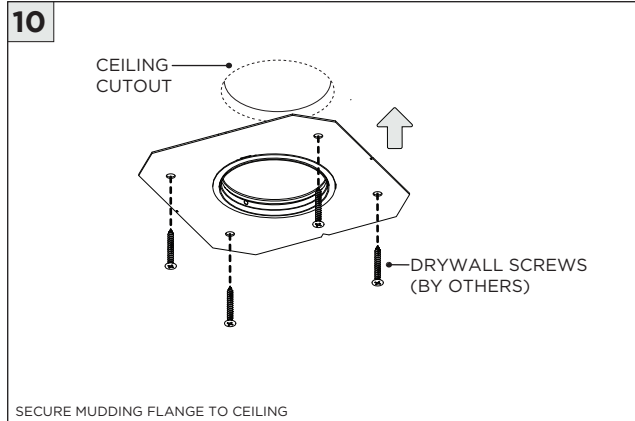

**SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)**

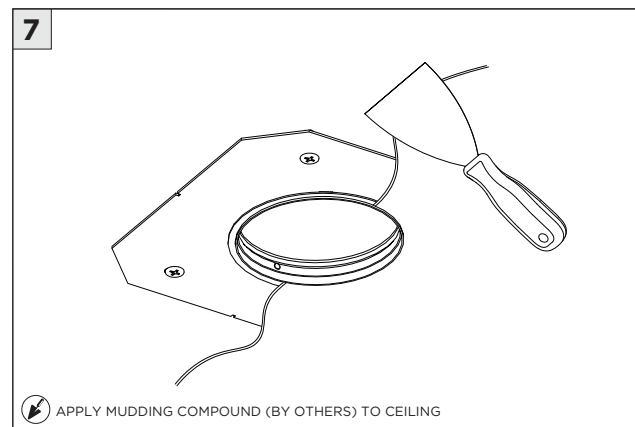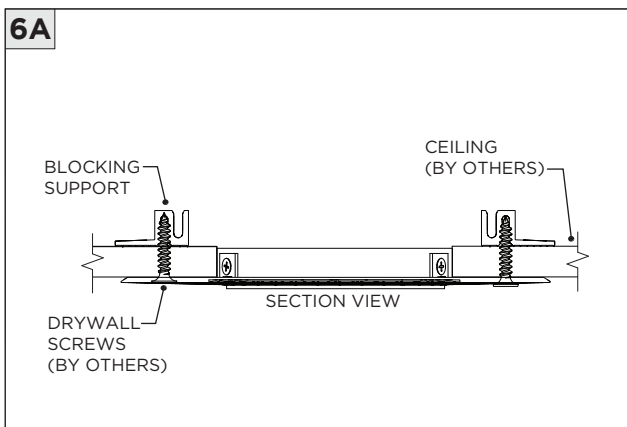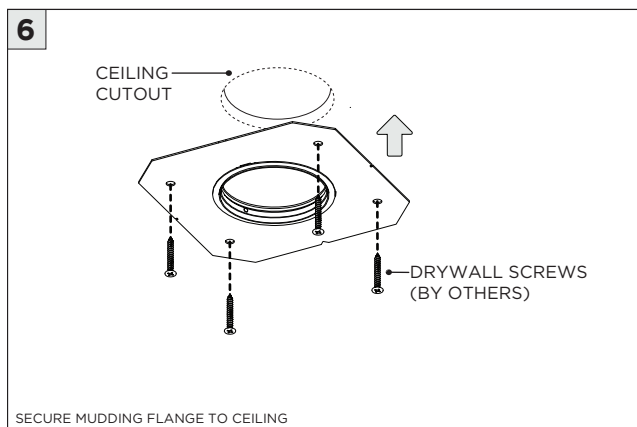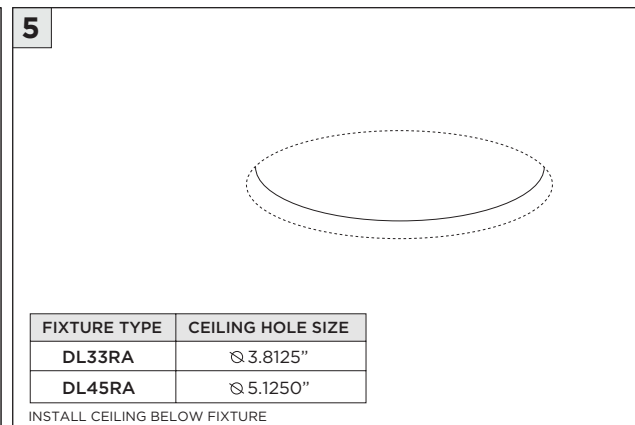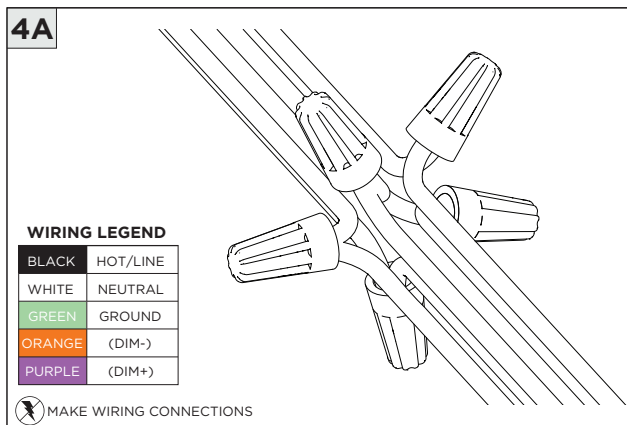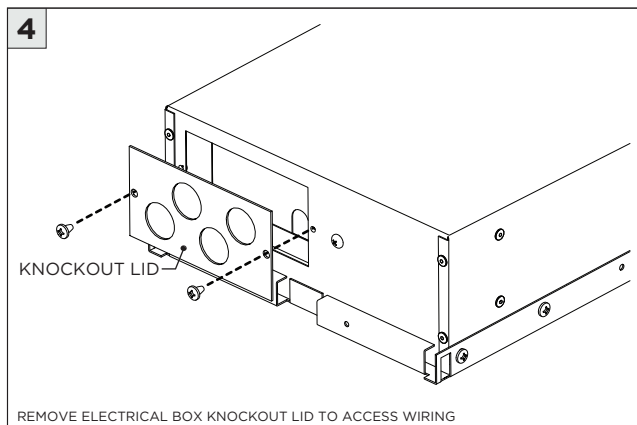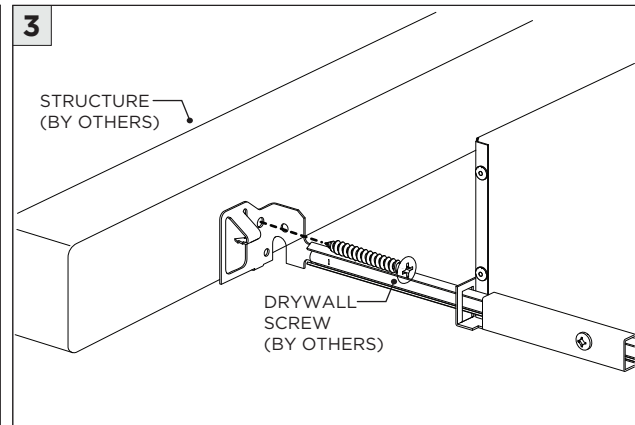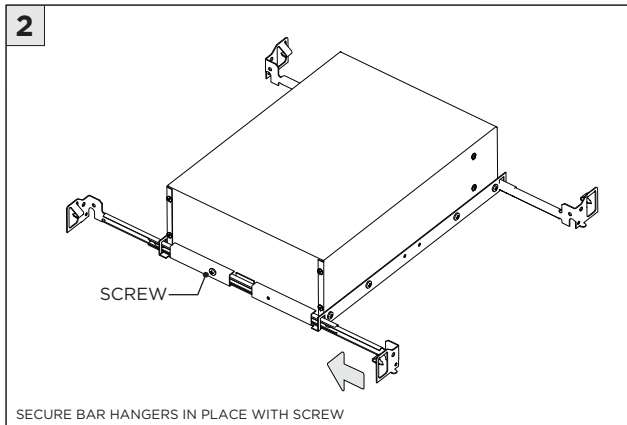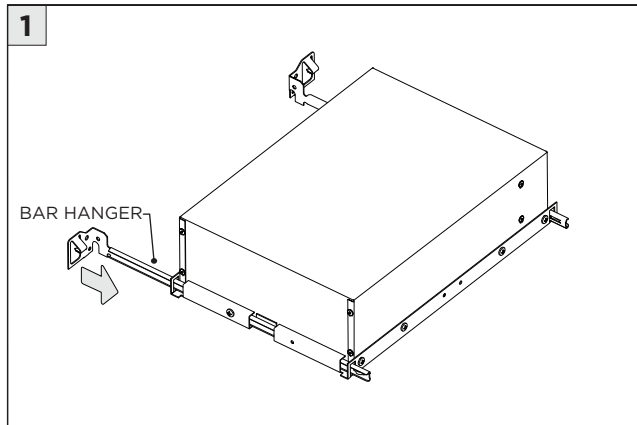


**9**

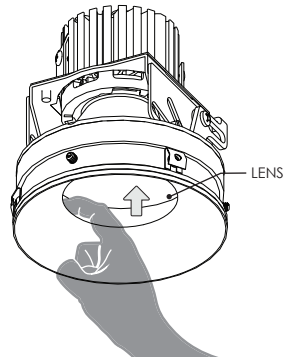


LIFT LENS AND DETATCH INSERT FROM LED ASSEMBLY

**10**

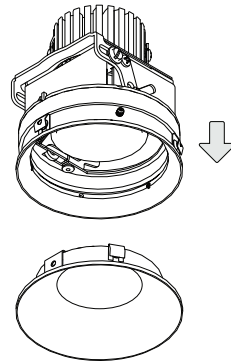


**11**

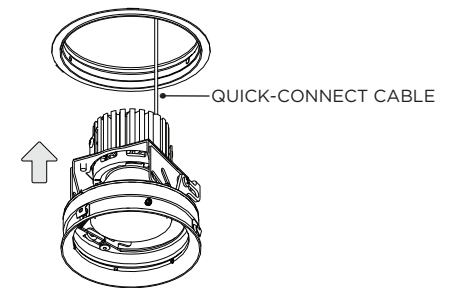


INSERT LED ASSEMBLY INTO CEILING

**11A**

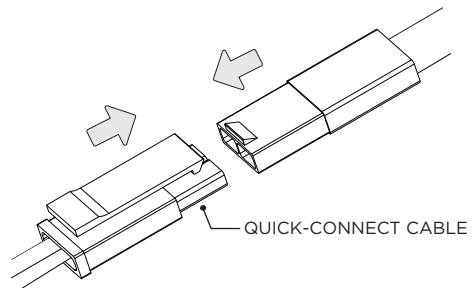


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY

**12**

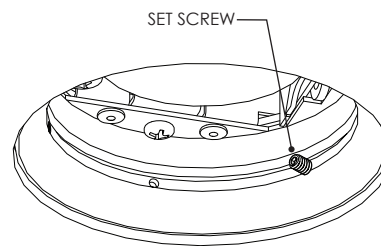

TIGHTEN 3 SET SCREWS INSIDE LED ASSEMBLY


**13**




REATTACH TRIM INSERT TO LED ASSEMBLY

**NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)**

**1 BAR HANGER INSTALLATION**  
(IF SUPPLIED BY 3G)

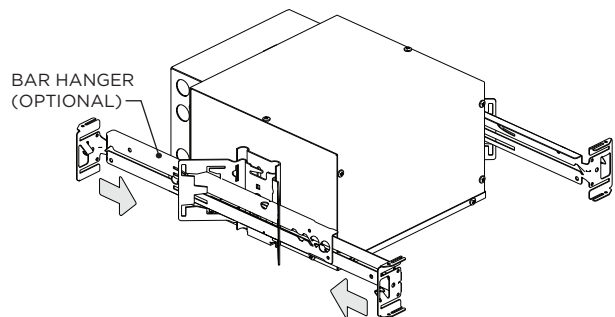


**1A**

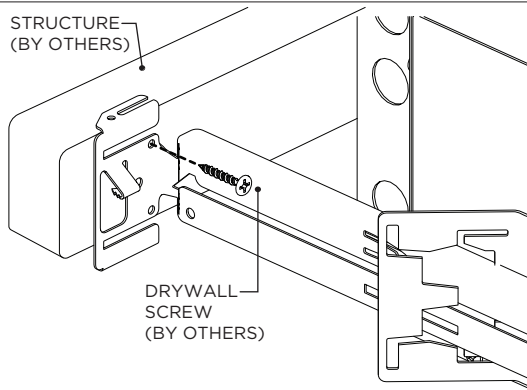


**2**

**OTHER BAR HANGER INSTALLATION**  
(NOT PROVIDED BY 3G)

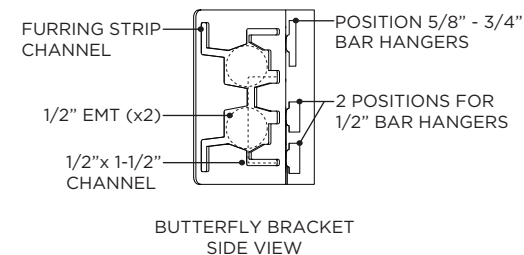

**3**

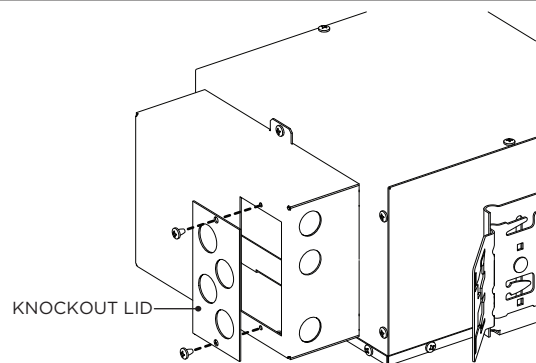


REMOVE ELECTRICAL BOX KNOCKOUT LID TO ACCESS WIRING

**3A**

**WIRING LEGEND**

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS

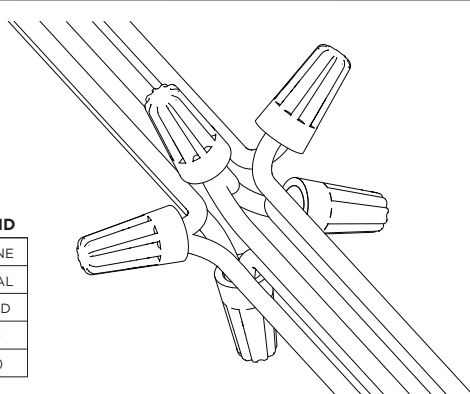


**4**



FIXTURE TYPE	CEILING HOLE SIZE
DL33RA	Ø 3.8125"
DL45RA	Ø 5.1250"


INSTALL CEILING BELOW FIXTURE

**5**

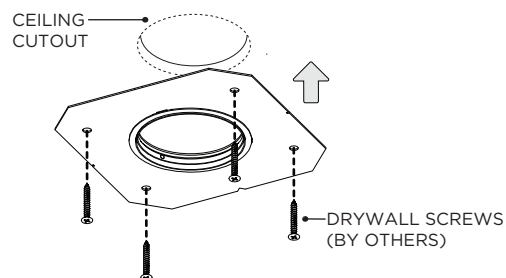


SECURE MUDDING FLANGE TO CEILING

**5A**

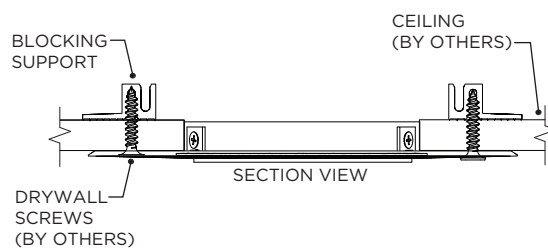


**6**

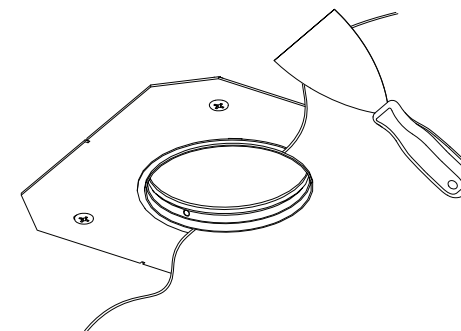

APPLY MUDDING COMPOUND (BY OTHERS) TO CEILING




**8**

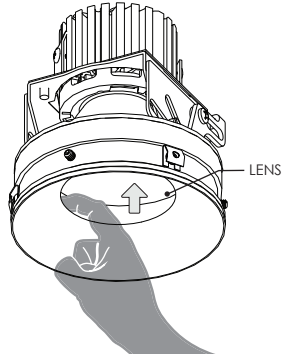


LIFT LENS AND DETATCH INSERT FROM ADAPTER RING

**8A**

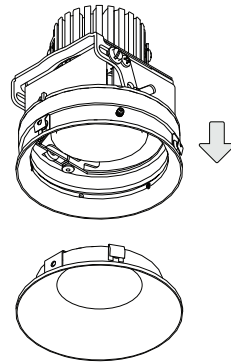


**9**

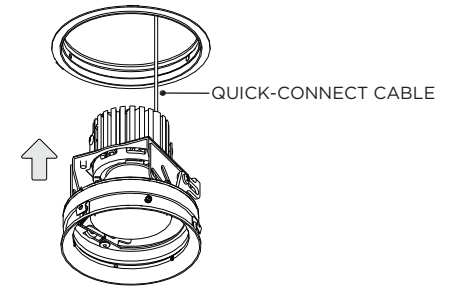


INSERT LED ASSEMBLY INTO CEILING

**9A**

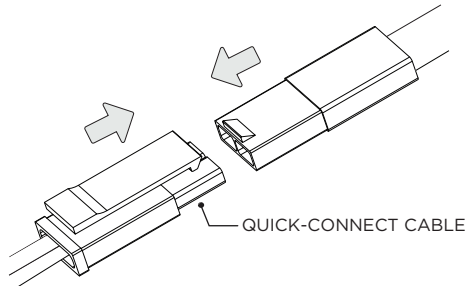


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY

**10**

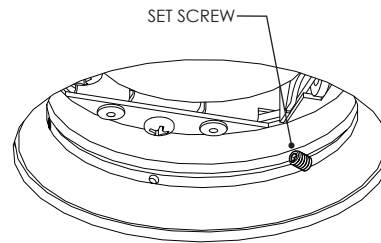

TIGHTEN 3 SET SCREWS INSIDE ADAPTER RING


**11**



REATTACH INSERT TO ADAPTER RING


**LED ADJUSTMENT**

**1**




LIFT LENS AND DETATCH INSERT FROM CEILING AS SHOWN

**1A**

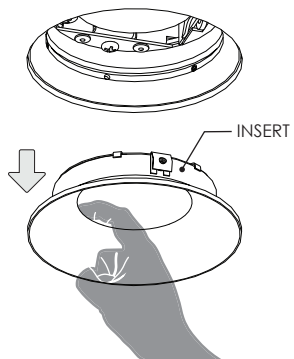


**2**

**ANGLE ADJUSTMENT**

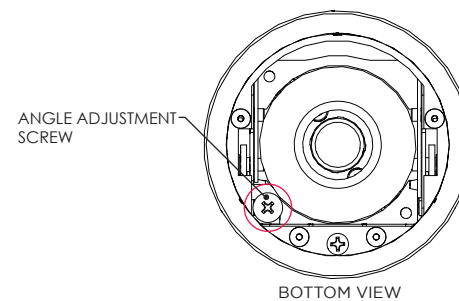


TURN SCREW TO ADJUST LED ANGLE

**2A**

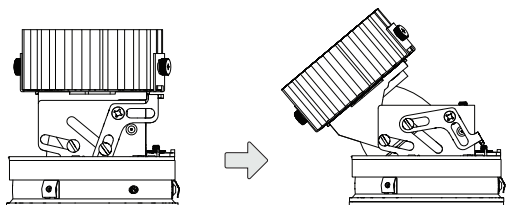


**3**

**ROTATION ADJUSTMENT**

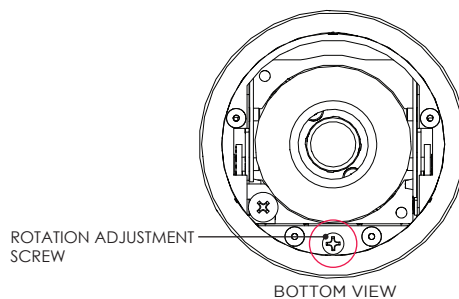









LOOSEN SCREW TO UNLOCK LED ASSEMBLY ROTATION

**3A**

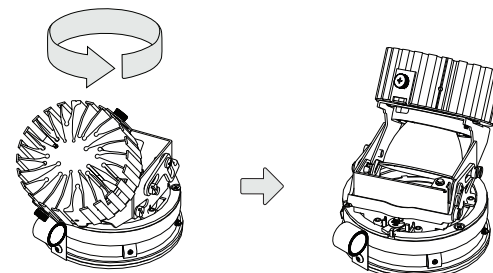


TIGHTEN SCREW AFTER ROTATING LED ASSEMBLY

**LED SERVICING**

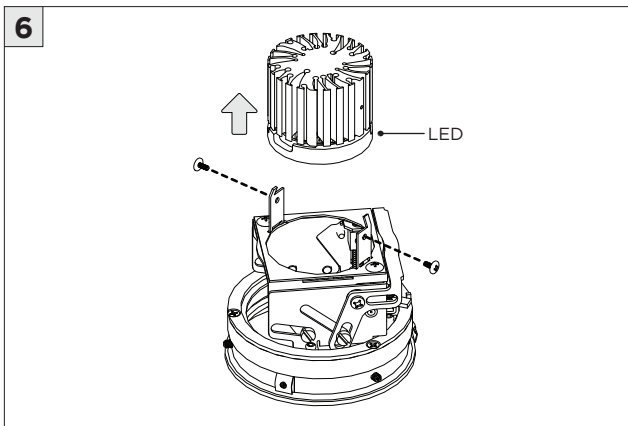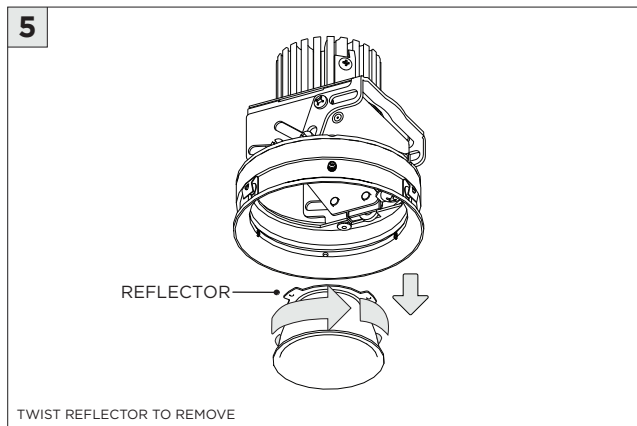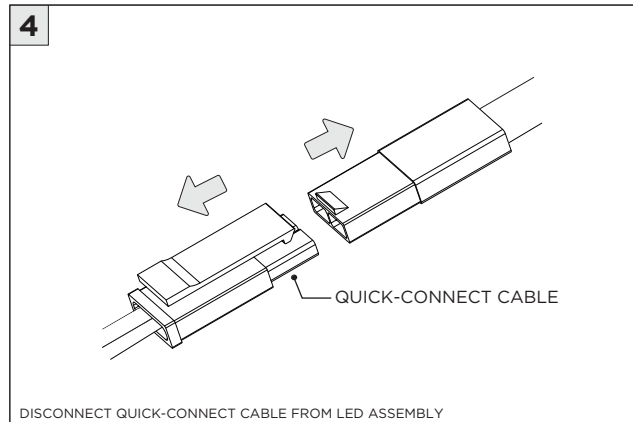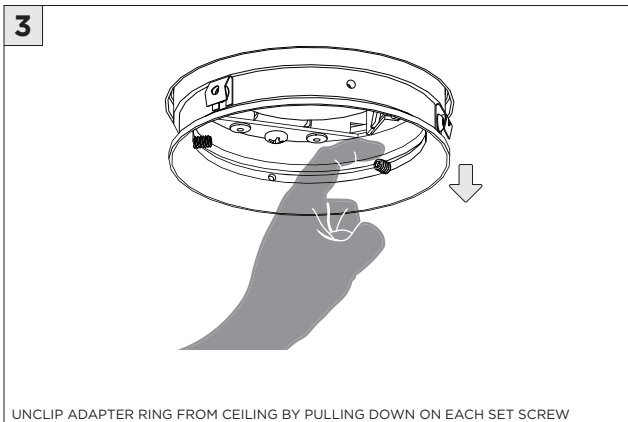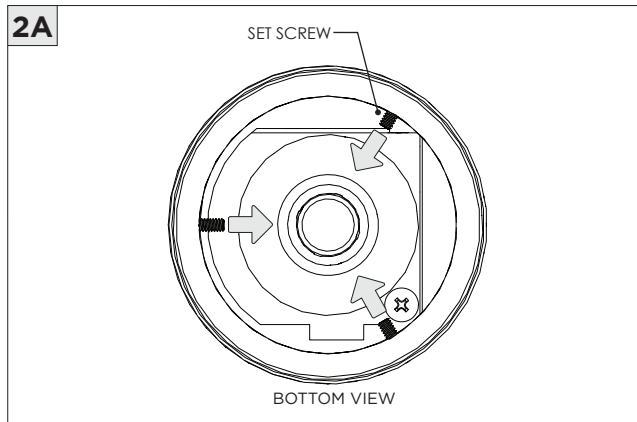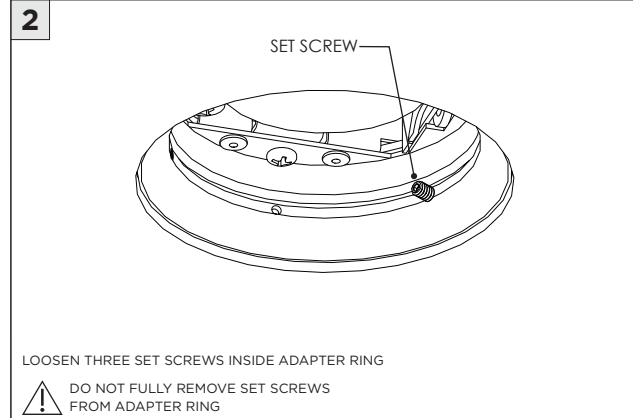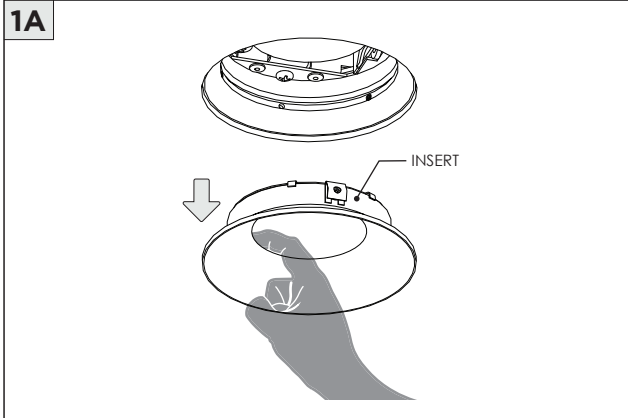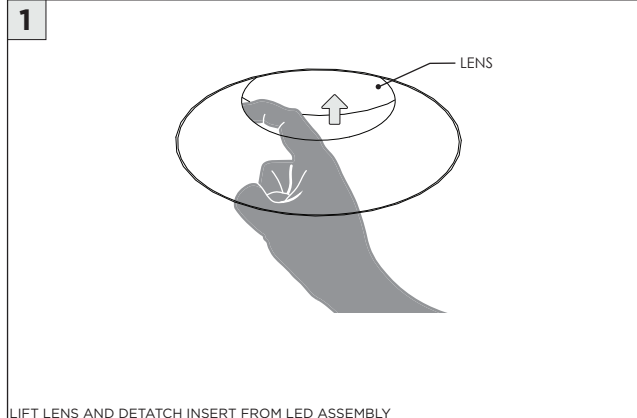


**DRIVER SERVICING**

**1 RMD - REMODEL**

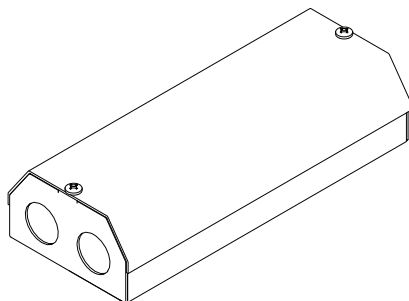


⚡ DISCONNECT POWER BEFORE SERVICING

**2**




LIFT LENS AND DETATCH INSERT FROM LED ASSEMBLY

**2A**

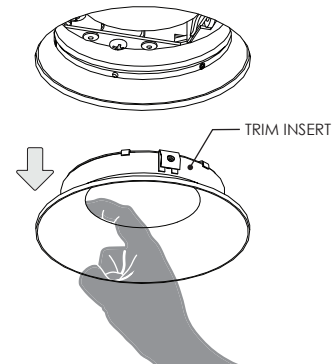


**3**

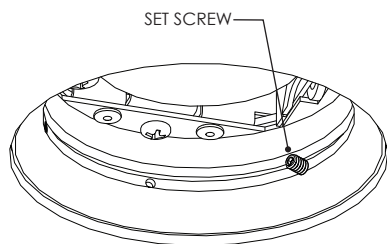

LOOSEN THREE SET SCREWS INSIDE LED ASSEMBLY


⚠ DO NOT FULLY REMOVE SET SCREWS FROM HOUSING

**3A**

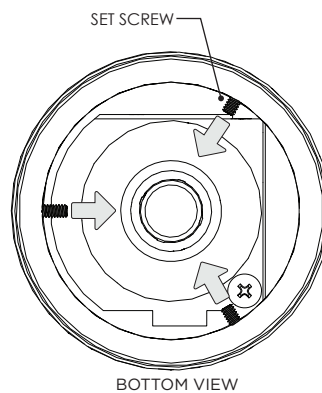


BOTTOM VIEW

**4**




UNCLIP LED ASSEMBLY FROM CEILING BY PULLING DOWN ON EACH SET SCREW

**4A**

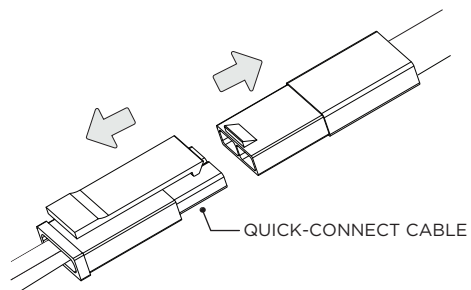


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

**5**




**6**

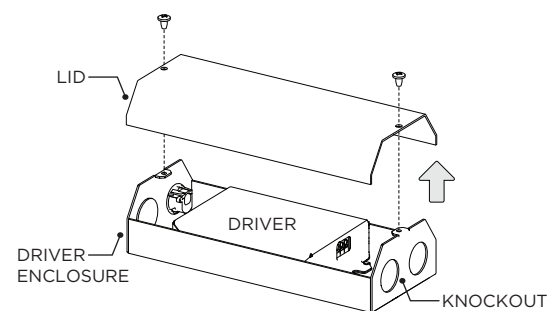


**DRIVER SERVICING**

**1 NCF - NEW CONSTRUCTION FRAME**

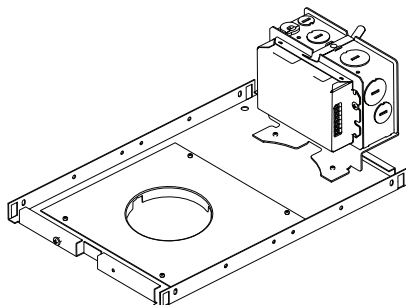


⚡ DISCONNECT POWER BEFORE SERVICING

**2**




LIFT LENS AND DETATCH INSERT FROM ADAPTER RING

**2A**

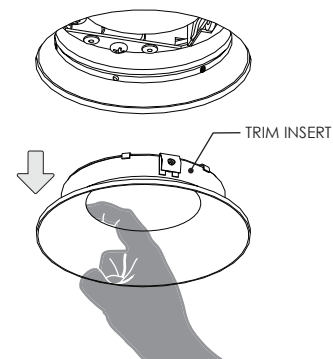


**3**

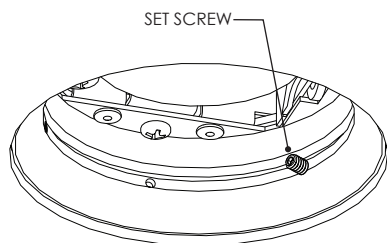

LOOSEN THREE SET SCREWS INSIDE ADAPTER RING


⚠ DO NOT FULLY REMOVE SET SCREWS FROM HOUSING

**4**

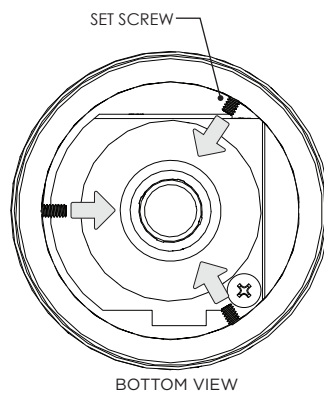


BOTTOM VIEW

**5**




UNCLIP ADAPTER RING FROM CEILING BY PULLING DOWN ON EACH SET SCREW

**5A**

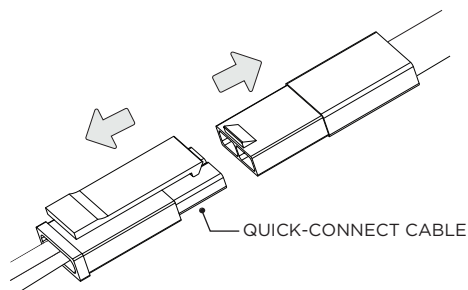


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY


**6**

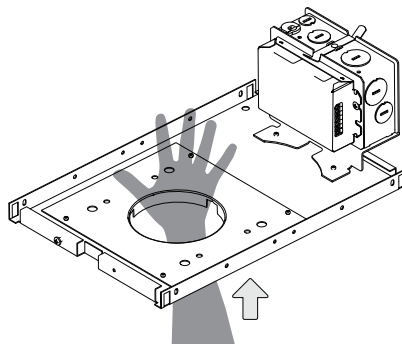


**7**

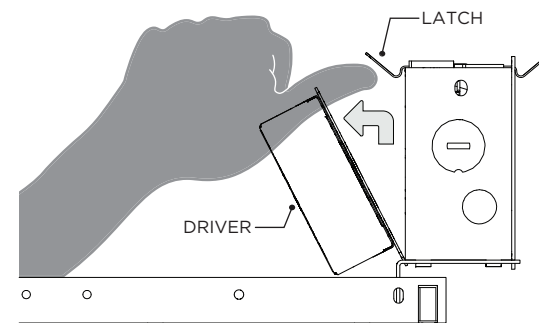

**8**

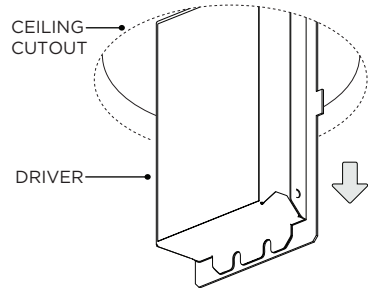


**8A**

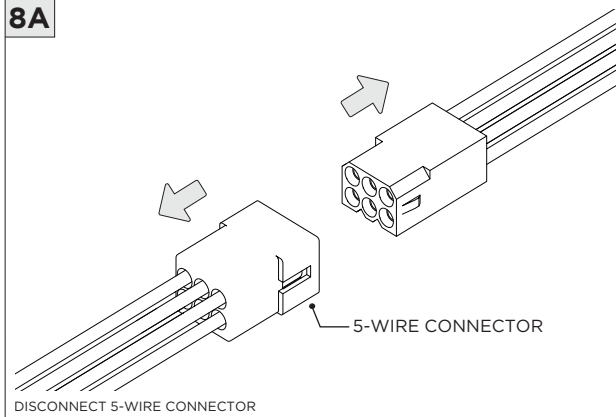

**9**


**NCF - NEW CONSTRUCTION FRAME  
FOR INTEGRATED BATTERY ONLY**

⚠ THIS UNIT UTILIZES MORE THAN ONE  
POWER SOURCE  
⚡ DISCONNECT ALL POWER SOURCES  
BEFORE SERVICING

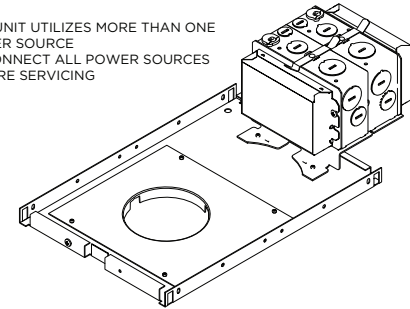

ⓘ ACCESS ABOVE CEILING REQUIRED FOR DRIVER SERVICING


**10**

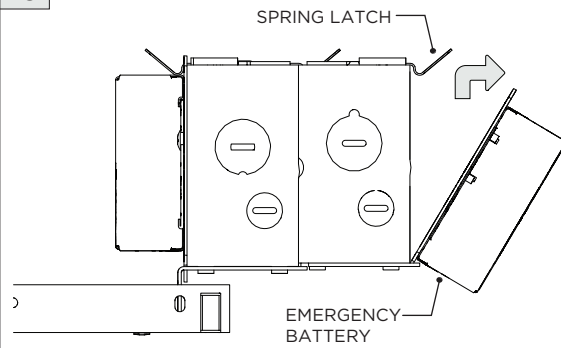

REMOVE BATTERY BOX COVER TO ACCESS WIRING


**DRIVER SERVICING**

**1 SH - SHALLOW HOUSING**

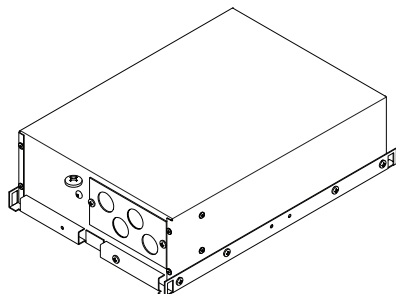


⚡ DISCONNECT POWER BEFORE SERVICING

**2**




LIFT LENS AND DETATCH INSERT FROM ADAPTER RING

**2A**

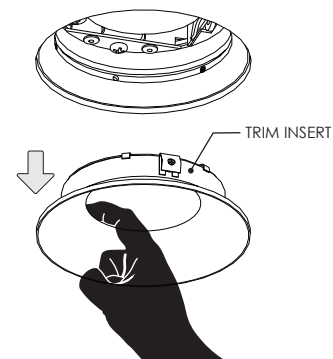


**3**

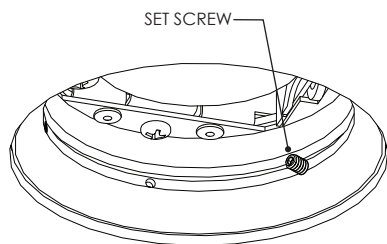


LOOSEN THREE SET SCREWS INSIDE ADAPTER RING

⚠ DO NOT FULLY REMOVE SET SCREWS FROM HOUSING

**4**

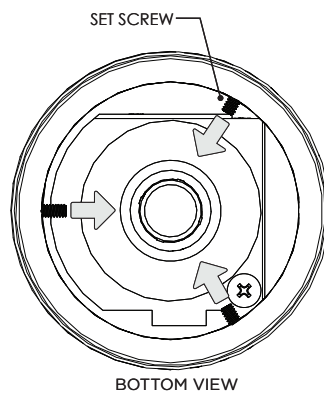


**5**




UNCLIP ADAPTER RING FROM CEILING BY PULLING DOWN ON EACH SET SCREW

**5A**

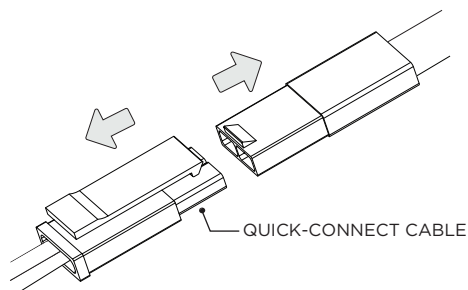


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY


**6**

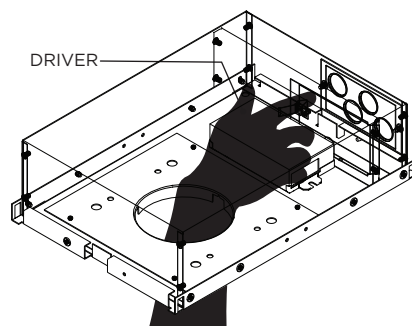

REMOVE DRIVER - SECURED WITH HOOK-AND-LOOP FASTENER

**7**

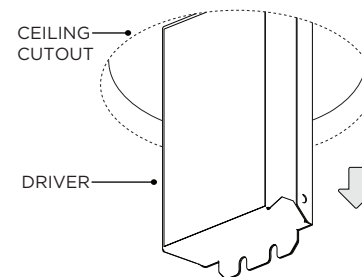


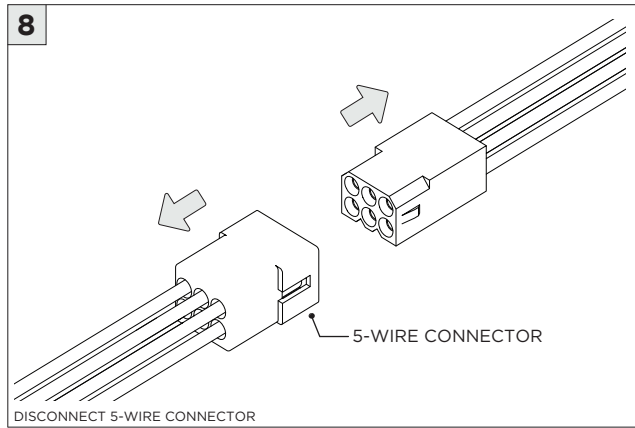




**DRIVER SERVICING**

**1 NC/IC - NEW CONSTRUCTION HOUSING**

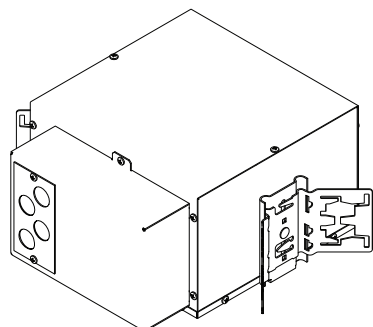


DISCONNECT POWER BEFORE SERVICING

**2**




LIFT LENS AND DETACH INSERT FROM ADAPTER RING


**2A**

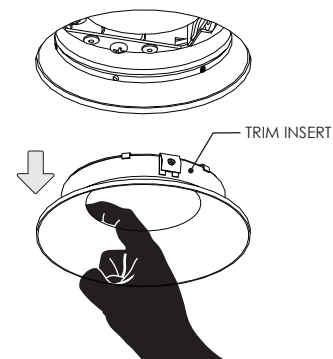


**3**

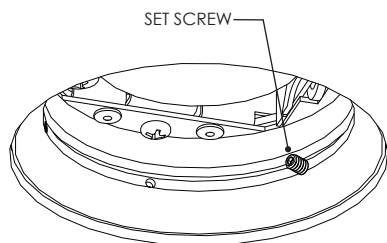

**4**

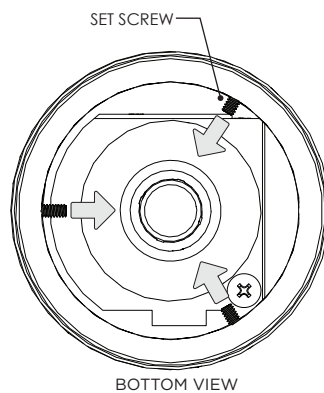


**5**




UNCLIP ADAPTER RING FROM CEILING BY PULLING DOWN ON EACH SET SCREW

**5A**

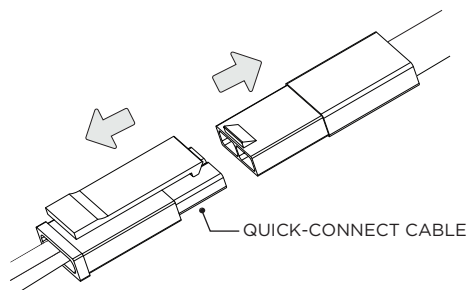

DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

**6**

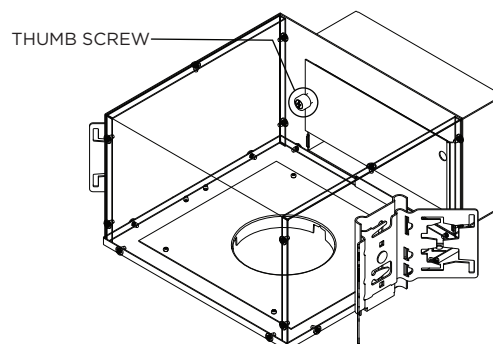

**7**

