3.3”/4.5” ROUND FIXED DOWNLIGHT


FLANGELESS MILLWORK



ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


INCLUDED COMPONENTS

NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)

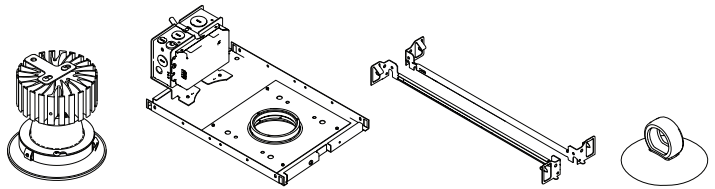


LED INSERT | NEW CONSTRUCTION FRAME | BAR HANGERS | SUCTION CUP

SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)

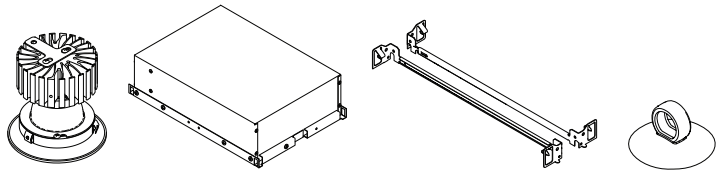

LED INSERT | SHALLOW HOUSING | BAR HANGERS | SUCTION CUP

NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)

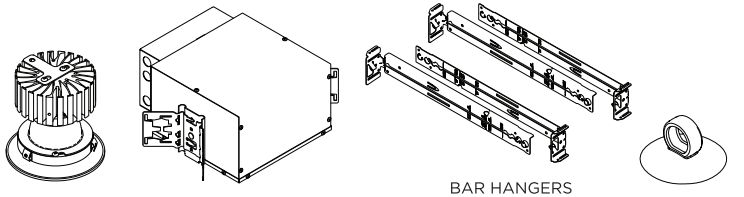

LED INSERT | NEW CONSTRUCTION HOUSING | BAR HANGERS (OPTIONAL) | SUCTION CUP

INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL ⓘ ATTENTION POWER ON POWER OFF	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING


3G LIGHTING

3.3”/4.5” ROUND FIXED DOWNLIGHT
FLANGELESS MILLWORK


INSTALLATION INSTRUCTIONS

NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)

1

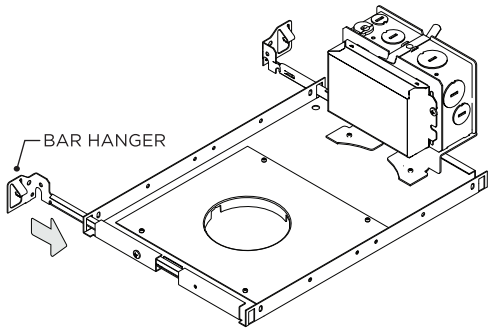


2

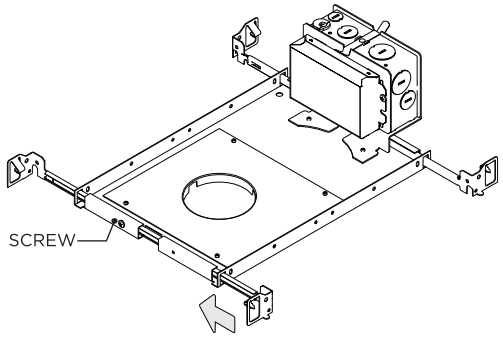


SECURE BAR HANGERS IN PLACE WITH SCREW

3

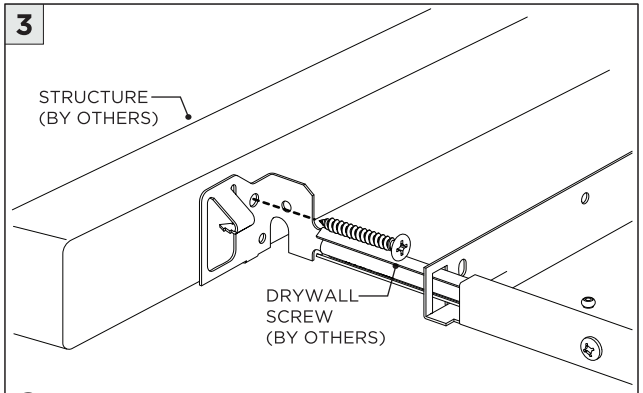


BAR HANGERS HAVE 14” to 26” EXTENSION

4

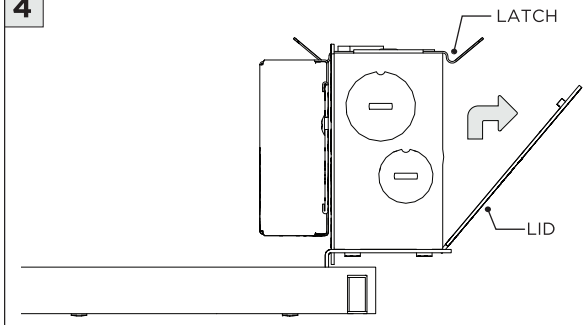

REMOVE ELECTRICAL BOX LID TO ACCESS WIRING

5

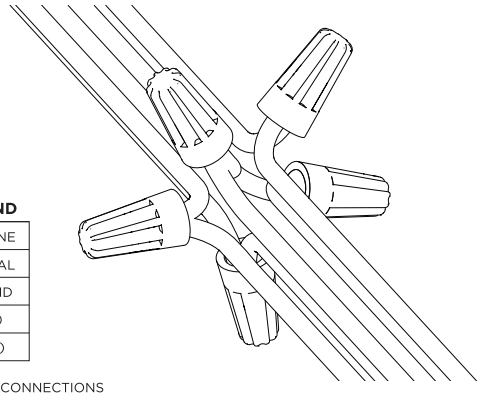


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)


MAKE WIRING CONNECTIONS

6 FOR INTEGRATED BATTERY ONLY

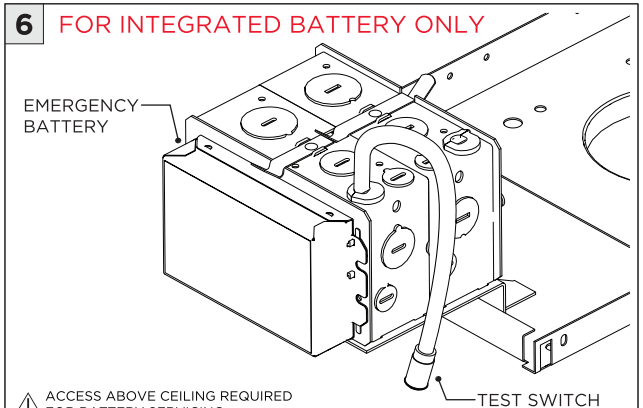


ACCESS ABOVE CEILING REQUIRED FOR BATTERY SERVICING

6A

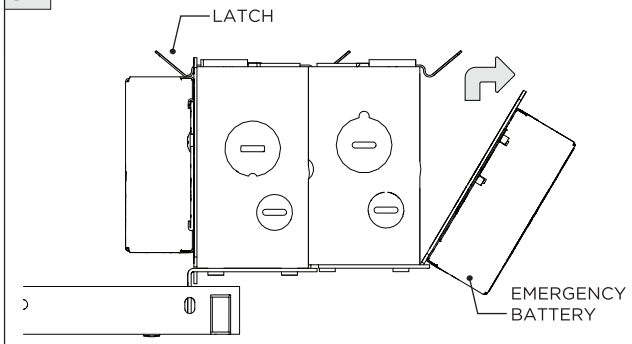

REMOVE BATTERY BOX COVER TO ACCESS WIRING

7

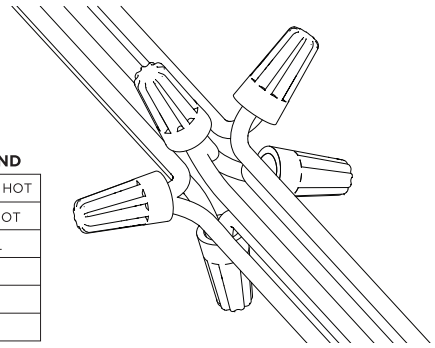


EMB WIRING LEGEND

RED	UNSWITCHED HOT
BLACK	SWITCHED HOT
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS


8



FIXTURE TYPE	CEILING HOLE SIZE
DL33RF	⦰3.525”
DL45RF	⦰4.780”


INSTALL CEILING BELOW FIXTURE

9

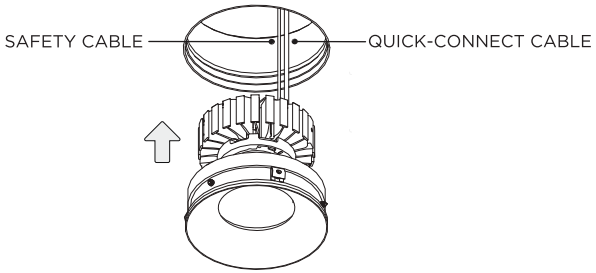

INSERT LED ASSEMBLY INTO CEILING

9A

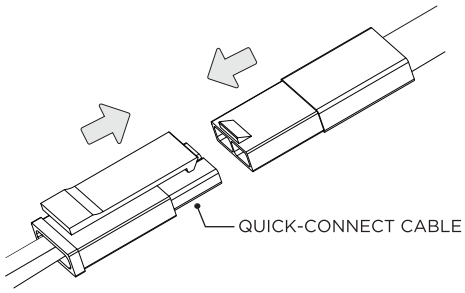

CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY


3G LIGHTING

3.3”/4.5” ROUND FIXED DOWNLIGHT
FLANGELESS MILLWORK


INSTALLATION INSTRUCTIONS

SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)

1

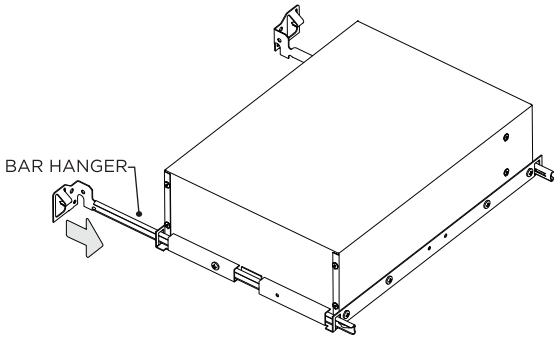


2

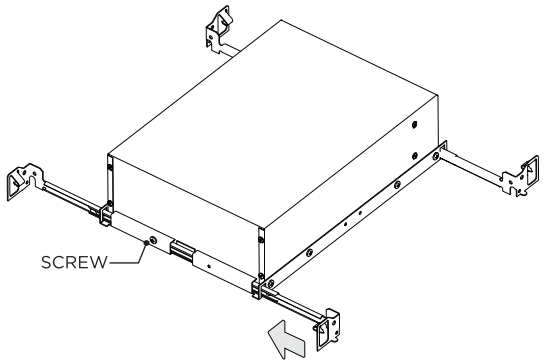


SECURE BAR HANGERS IN PLACE WITH SCREW

3

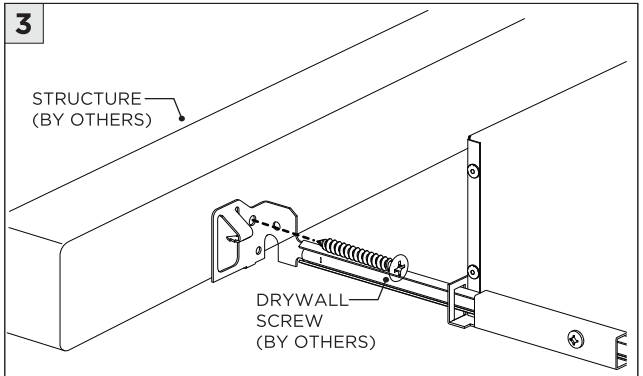


4

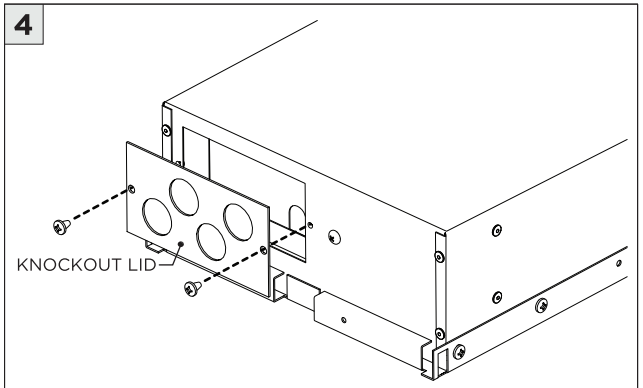

REMOVE ELECTRICAL BOX KNOCKOUT LID TO ACCESS WIRING

4A

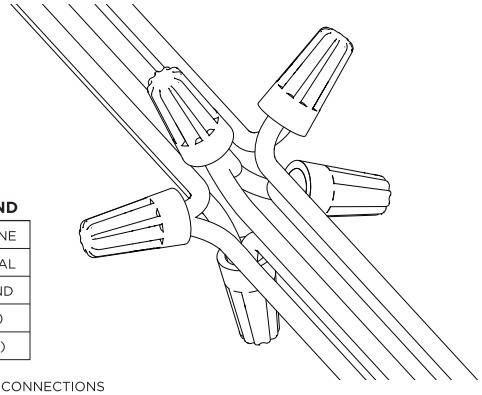


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS


5



FIXTURE TYPE	CEILING HOLE SIZE
DL33RF	⦰3.525”
DL45RF	⦰4.780”


INSTALL CEILING BELOW FIXTURE

6

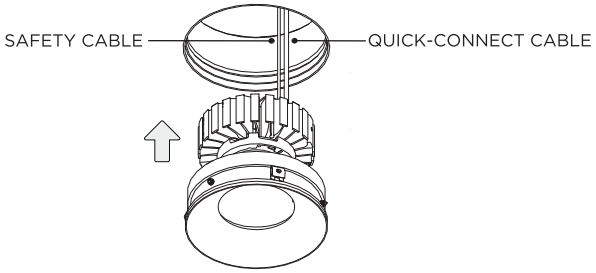

INSERT LED ASSEMBLY INTO CEILING


6A

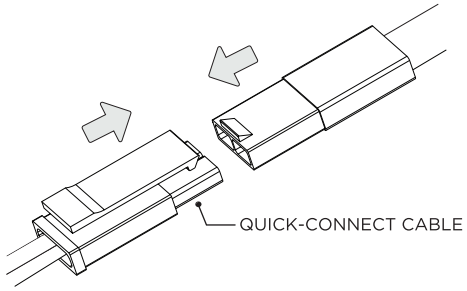


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY

NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)


1 BAR HANGER INSTALLATION
(IF SUPPLIED BY 3G)

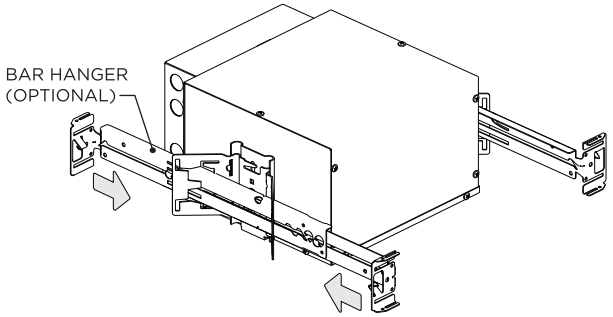

1A

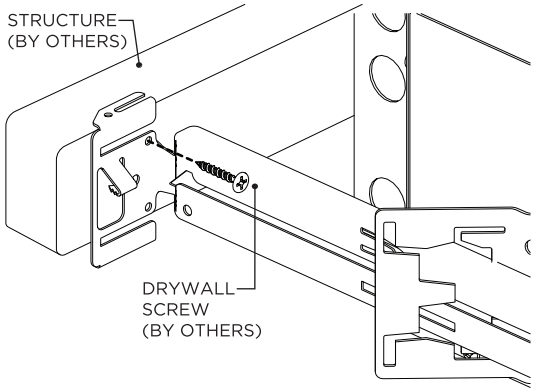


2 OTHER BAR HANGER INSTALLATION
(NOT PROVIDED BY 3G)

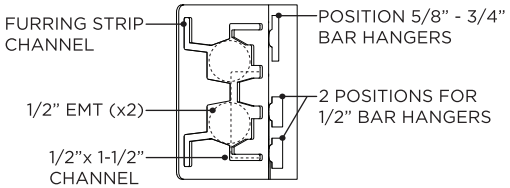


BUTTERFLY BRACKET
SIDE VIEW

3

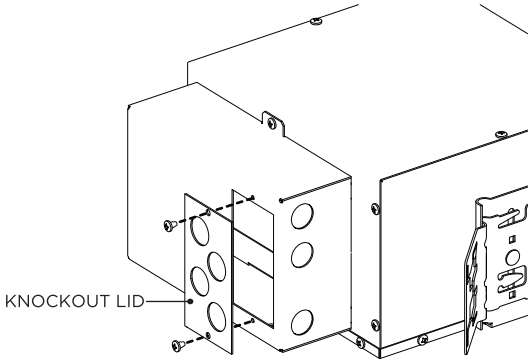

REMOVE ELECTRICAL BOX KNOCKOUT LID TO ACCESS WIRING

3A

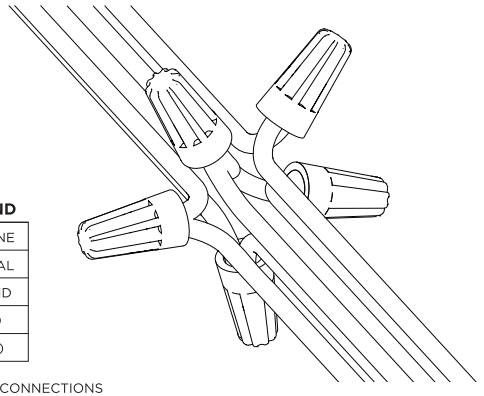


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS


4



FIXTURE TYPE	CEILING HOLE SIZE
DL33RF	⦰3.525”
DL45RF	⦰4.780”


INSTALL CEILING BELOW FIXTURE

5

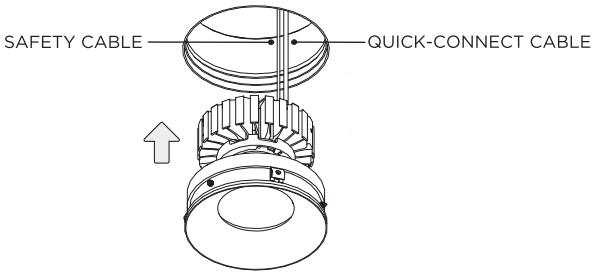

INSERT LED ASSEMBLY INTO CEILING


5A

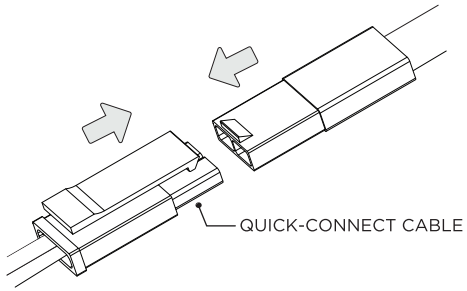

CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY


LED SERVICING - DL33

1




REMOVE LED ASSEMBLY FROM CEILING

1A

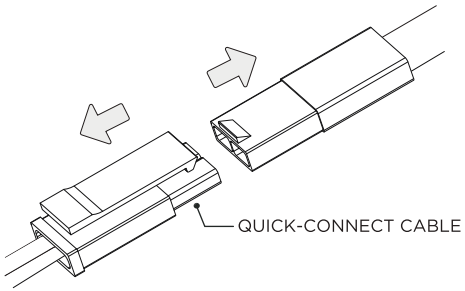


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

2

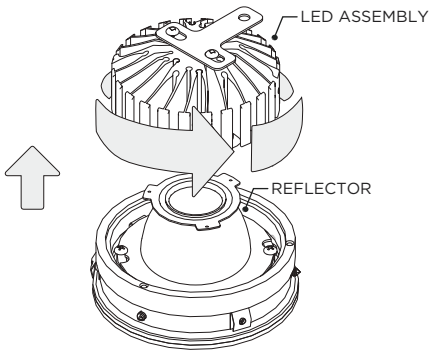


LED SERVICING - DL45

1

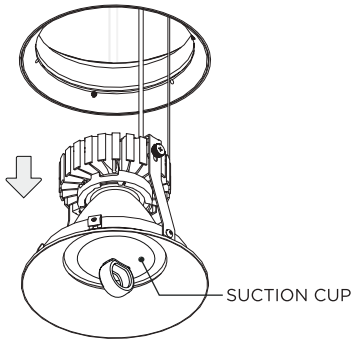


REMOVE LED ASSEMBLY FROM CEILING

1A

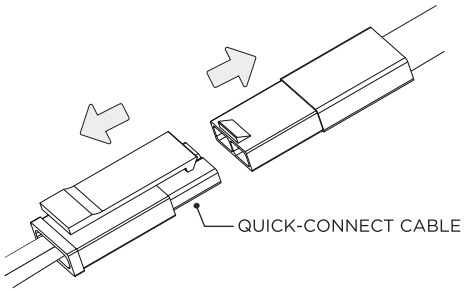


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY


2 70mm HEATSINK

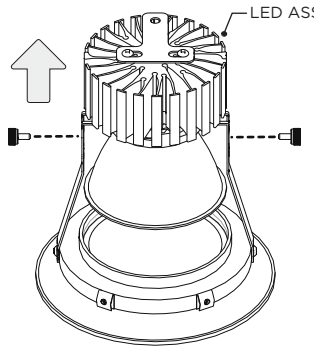


3

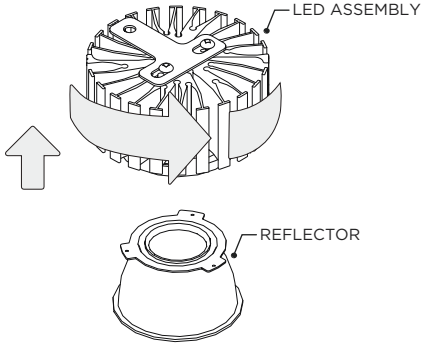

1 99mm HEATSINK

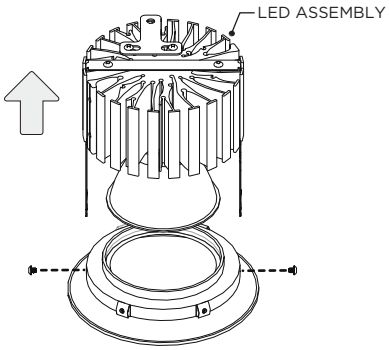


2

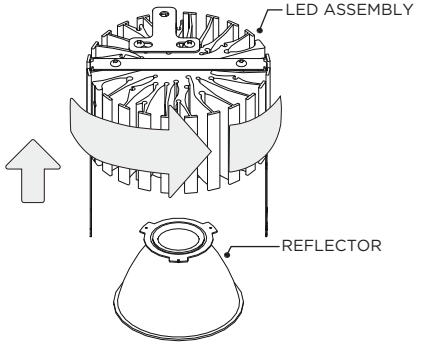


DRIVER SERVICING - DL33

1 NCF - NEW CONSTRUCTION FRAME

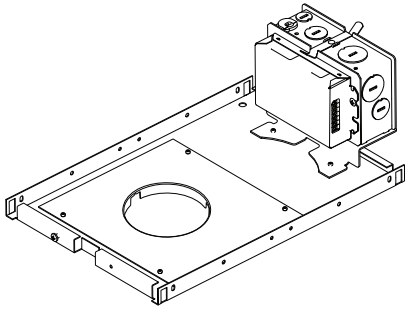


DISCONNECT POWER BEFORE SERVICING

2

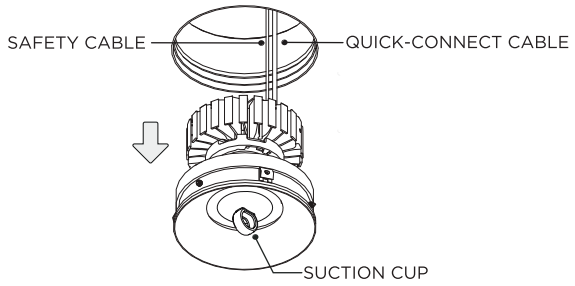


REMOVE LED ASSEMBLY FROM CEILING

2A

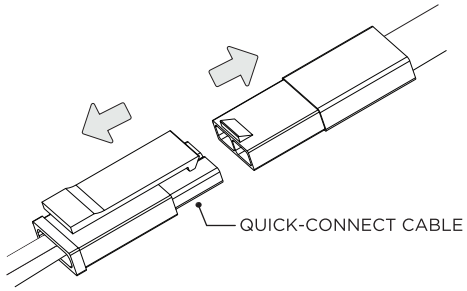


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

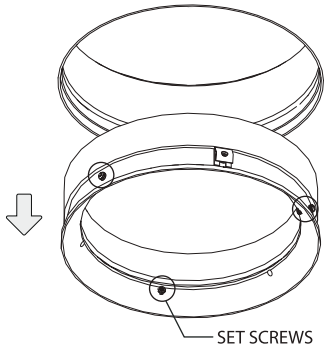


LOOSEN SET SCREWS AND REMOVE INSERT RING FROM CEILING


4

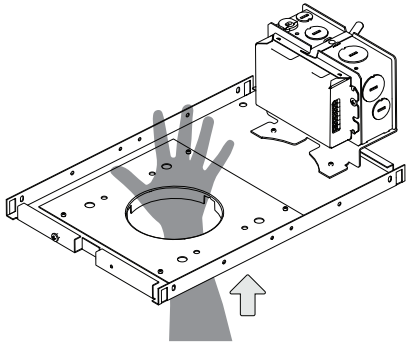


5

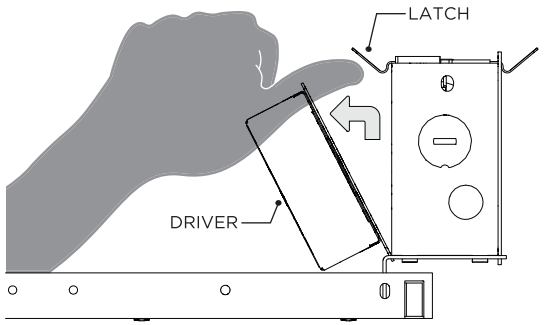

6

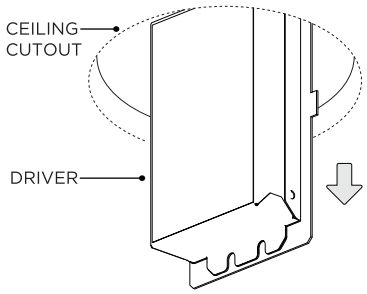


6A

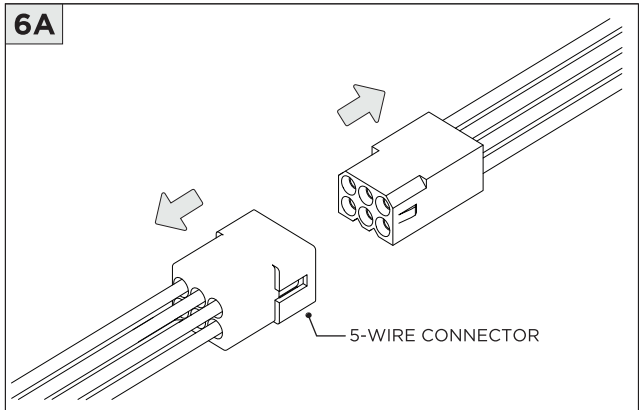

DISCONNECT 5-WIRE CONNECTOR


7 NCF - NEW CONSTRUCTION FRAME FOR INTEGRATED BATTERY ONLY

THIS UNIT UTILIZES MORE THAN ONE POWER SOURCE
DISCONNECT ALL POWER SOURCES BEFORE SERVICING

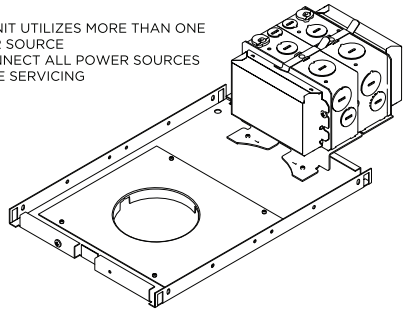

ACCESS ABOVE CEILING REQUIRED FOR DRIVER SERVICING


8

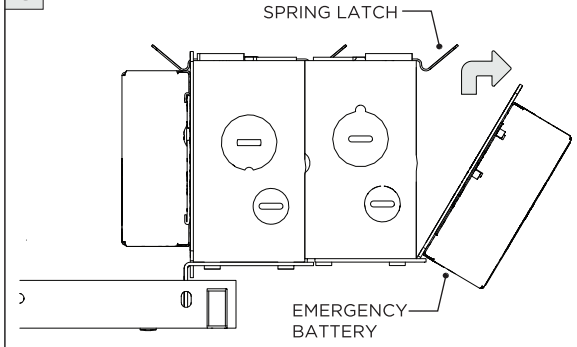

REMOVE BATTERY BOX COVER TO ACCESS WIRING


DRIVER SERVICING - DL33

1 **SH -** SHALLOW HOUSING

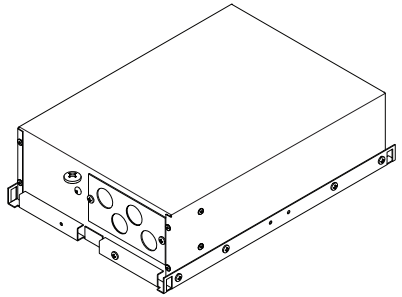


DISCONNECT POWER BEFORE SERVICING

2




REMOVE LED ASSEMBLY FROM CEILING

2A

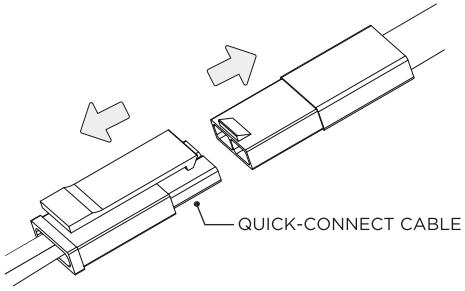


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

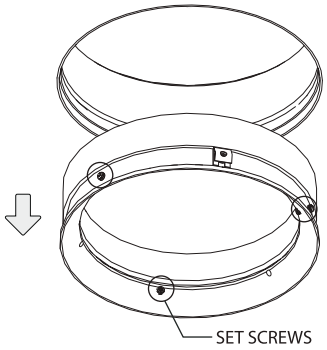


LOOSEN SET SCREWS AND REMOVE INSERT RING FROM CEILING

4

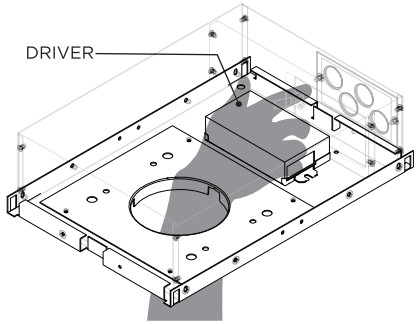


REMOVE DRIVER - SECURED WITH HOOK-AND-LOOP FASTENER

5

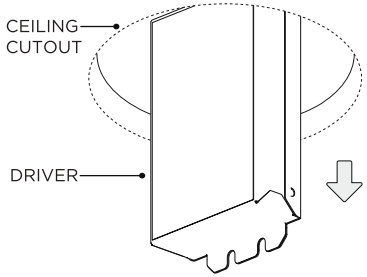


6A

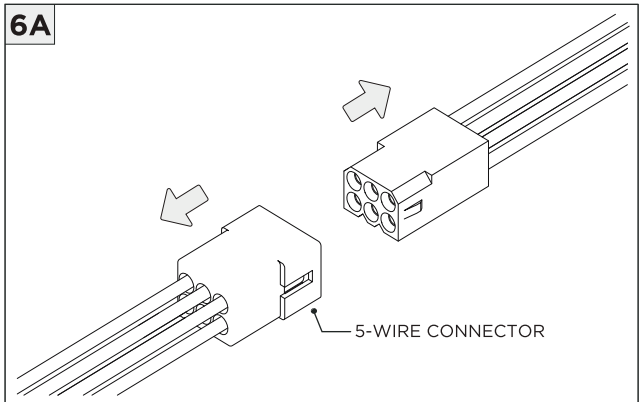

DISCONNECT 5-WIRE CONNECTOR


DRIVER SERVICING - DL33

1 **NC/IC -** NEW CONSTRUCTION HOUSING

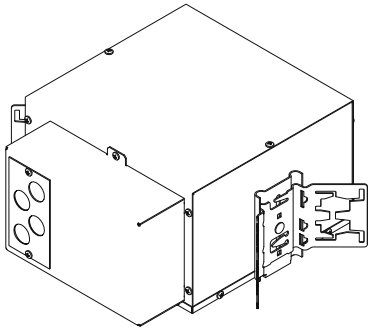


DISCONNECT POWER BEFORE SERVICING

2




REMOVE LED ASSEMBLY FROM CEILING

2A

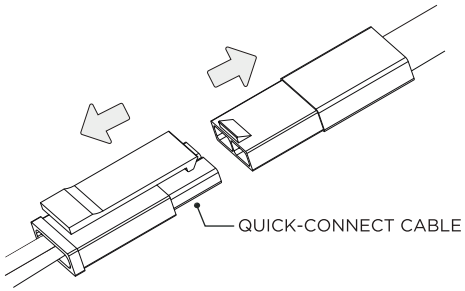


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

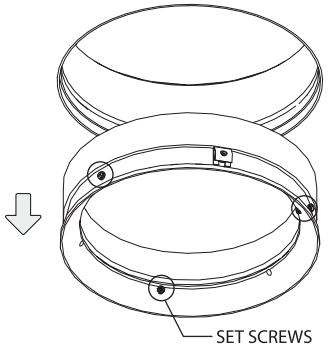


LOOSEN SET SCREWS AND REMOVE INSERT RING FROM CEILING


4

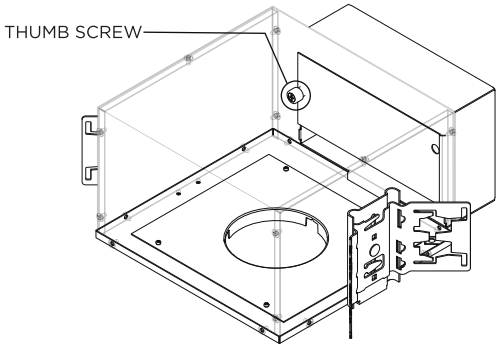


5

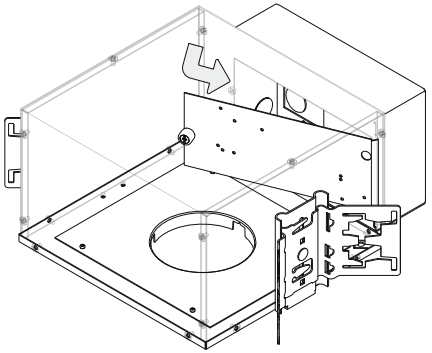

6

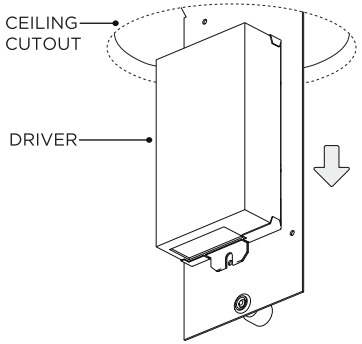


6A

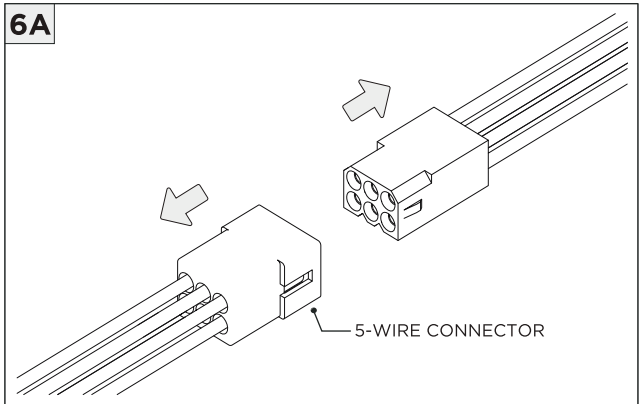

DISCONNECT 5-WIRE CONNECTOR


DRIVER SERVICING - DL45

1 **NCF -** NEW CONSTRUCTION FRAME

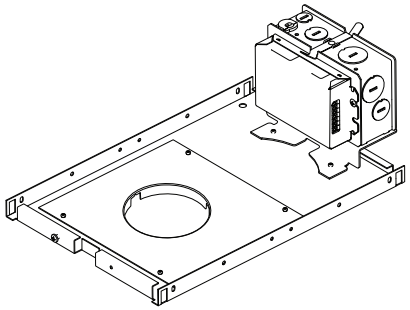


DISCONNECT POWER BEFORE SERVICING

2

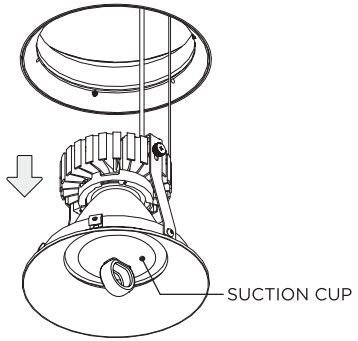


REMOVE LED ASSEMBLY FROM CEILING

2A

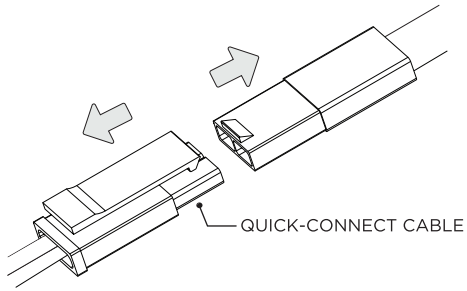


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY


3

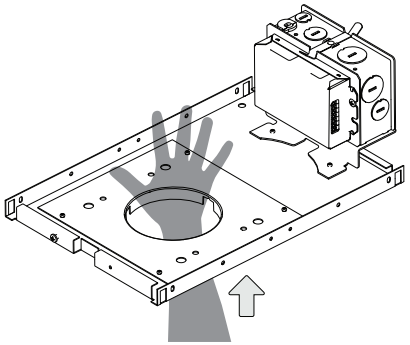


4

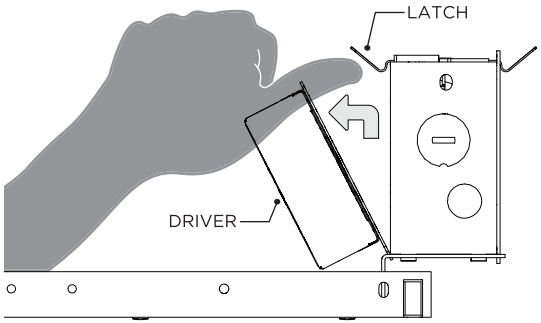

5

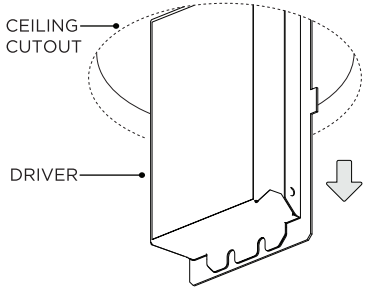


5A

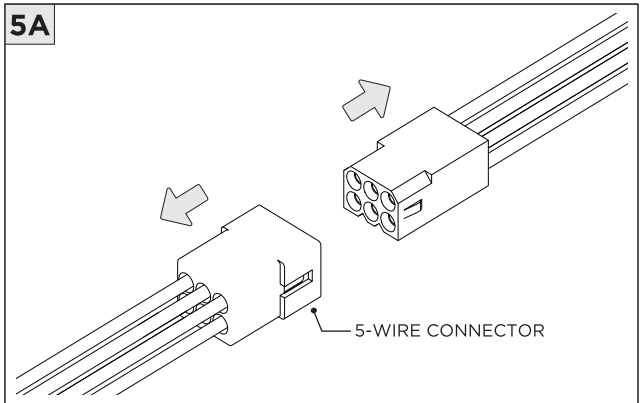

DISCONNECT 5-WIRE CONNECTOR


6 **NCF -** NEW CONSTRUCTION FRAME
FOR INTEGRATED BATTERY ONLY

THIS UNIT UTILIZES MORE THAN ONE POWER SOURCE
DISCONNECT ALL POWER SOURCES BEFORE SERVICING

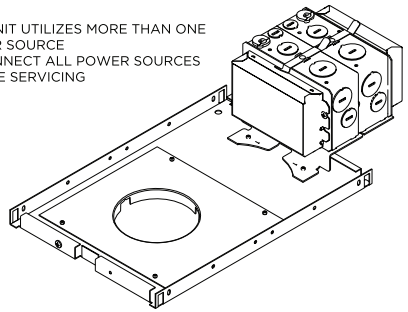

ACCESS ABOVE CEILING REQUIRED FOR DRIVER SERVICING


7

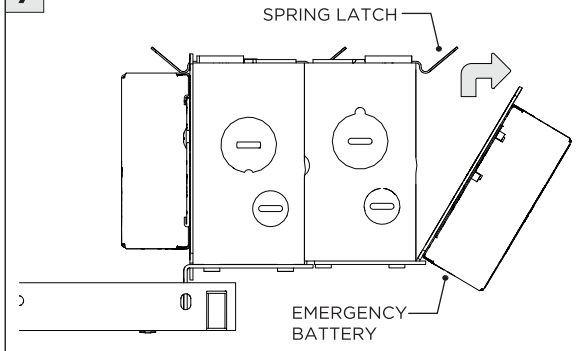

REMOVE BATTERY BOX COVER TO ACCESS WIRING


DRIVER SERVICING - DL45

1 **SH -** SHALLOW HOUSING

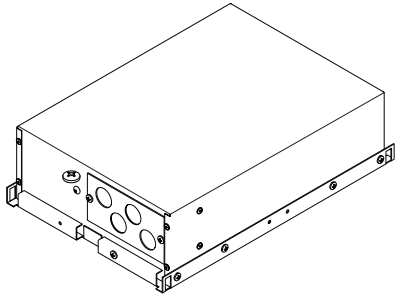


DISCONNECT POWER BEFORE SERVICING

2

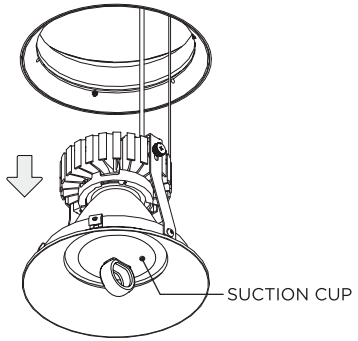


REMOVE LED ASSEMBLY FROM CEILING

2A

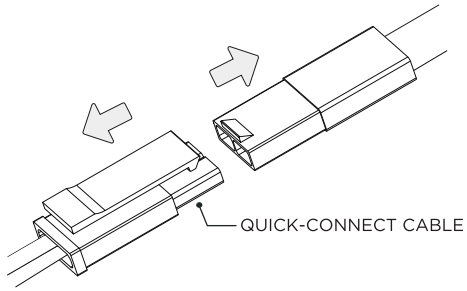


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

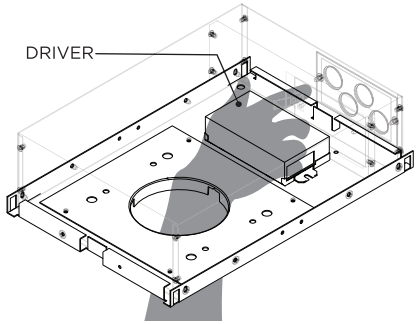


REMOVE DRIVER - SECURED WITH HOOK-AND-LOOP FASTENER

4

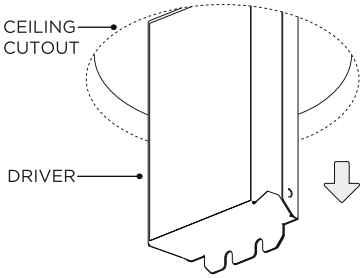


4A

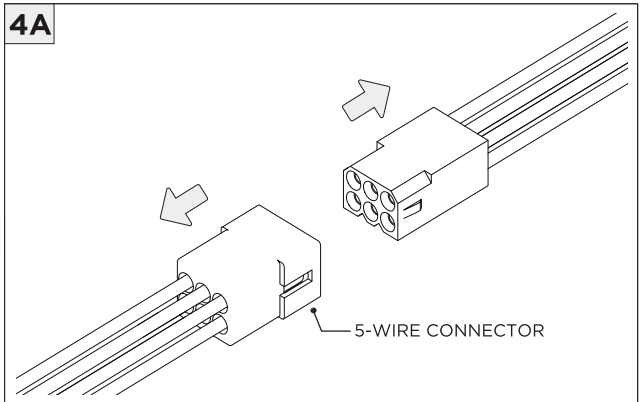

DISCONNECT 5-WIRE CONNECTOR


DRIVER SERVICING - DL45

1 **NC/IC -** NEW CONSTRUCTION HOUSING

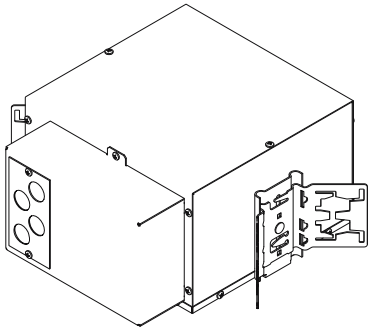


DISCONNECT POWER BEFORE SERVICING

2

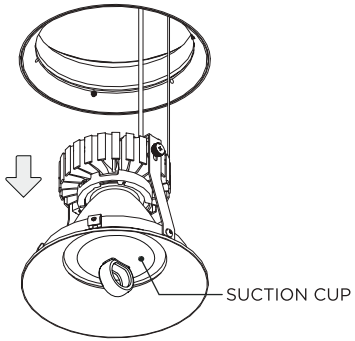


REMOVE LED ASSEMBLY FROM CEILING

2A

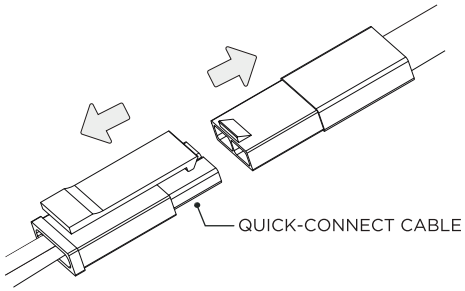


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY


3

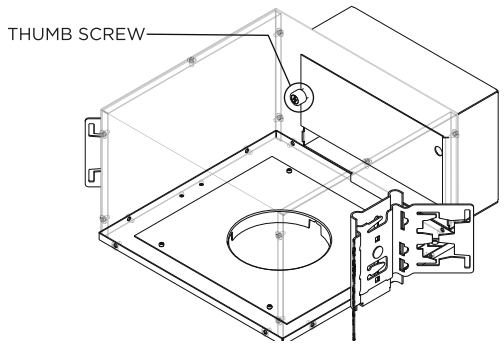


4

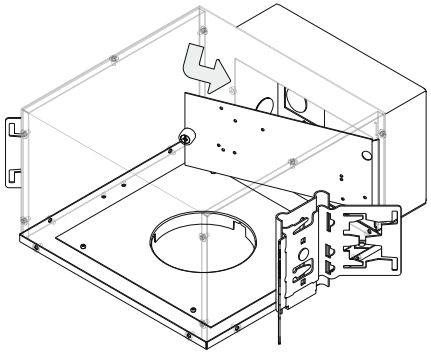

5

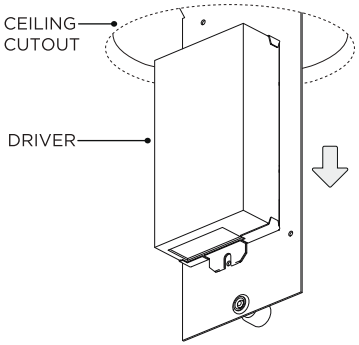

5A

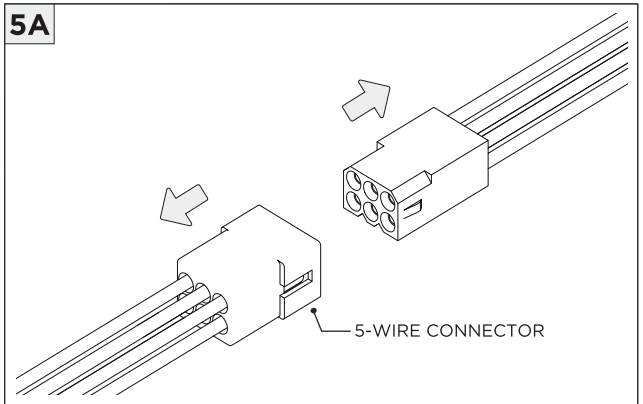

DISCONNECT 5-WIRE CONNECTOR