




# 3GQ-1RLI

1.5" RECESSED LINEAR

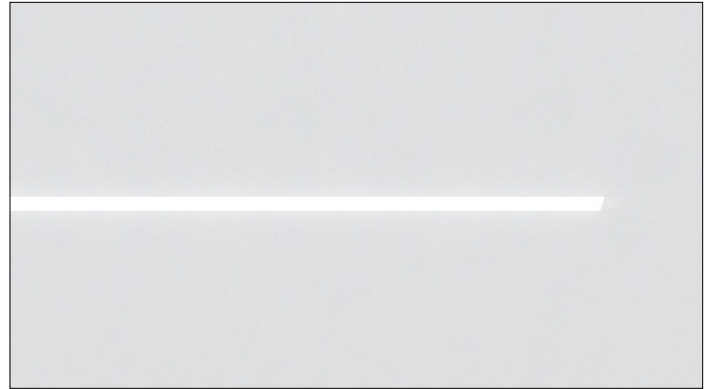

1.5" aperture with one piece extruded aluminum housing  
 LED system with performance up to 111 lumens per watt  
 Individual or continuous runs available (see quickship run chart)  
 Lumen outputs ranging from 250lm/ft to 1000lm/ft  
 Universal voltage, 0-10V integral drivers with 100-1% dimming range  
 Suitable for drywall, grid, wood, and other architectural ceilings  
 Extruded acrylic lens with optimal performance and glare control

**10 DAY QUICKSHIP**  
 MAX ORDER SIZE: 400'

<b>PROJECT:</b>		<b>TYPE:</b>	
<b>CATALOG#:</b>		<b>DATE:</b>	<b>QTY:</b>


CAT. NO	LUMEN OUTPUT	CRI	COLOR TEMP	VOLTAGE	DRIVER
<b>3GQ-1RLI</b>	<b>D250</b> - 250 LM/FT <b>D500</b> - 500 LM/FT <b>D750</b> - 750 LM/FT <b>D1000</b> - 1000 LM/FT *  <small>*1000lm not available with 90CRI option</small>	<b>S80</b> - 80+ CRI <b>H90</b> - 90+ CRI	<b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>UNV</b> - 120/277V	<b>DIM</b> - 0-10V (100-1%)

FLANGE TYPE	LENS OPTION	RUN TYPE
<b>WT</b> - WHITE TRIM <b>XTR</b> - TRIMLESS (MUD-IN DRYWALL) <b>FX</b> - FLANGELESS <b>GCX</b> - GRID CEILING * (UNIVERSAL MOUNT)  <small>*Universal mounting brackets used for all grid ceiling types only. See mounting section for details</small>	<b>FL</b> - FLUSH <b>DASY</b> - ASYMMETRIC OPTIC	<b>S</b> - _____ (STRAIGHT RUN) *  <small>Individual fixtures available in 4', 5', 6' and 8'            Continuous runs starting at 10' and 12'            Runs longer than 12' available in 4' increments (16', 20', 24' etc)</small>

Refer to standard specification sheets for complete details. Please note that only options shown above qualify for 10 day 3GQ program


**HARD CEILING**

**WT - TRIM**

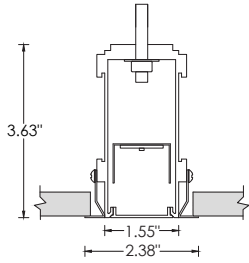


RECOMMENDED CEILING OPENING 2.15"

**XTR - TRIMLESS**

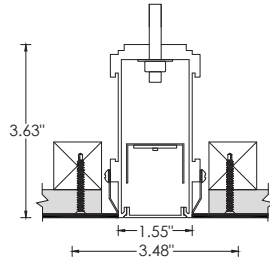

RECOMMENDED CEILING OPENING 2.25"


**FX - FLANGELESS**

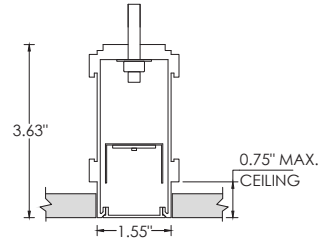


RECOMMENDED CEILING OPENING 1.60"

**GRID CEILING**


**9L - 9/16" LAYIN**




**9TG - 9/16" TEGULAR**




**15L - 15/16" LAYIN**

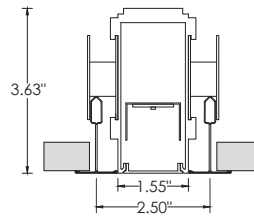


**15TG - 15/16" TEGULAR**

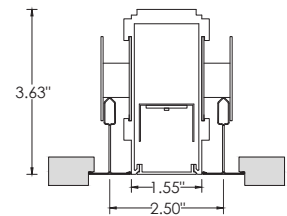


**9TP - 9/16" TEGULAR**



**15TP - 15/16" TEGULAR**

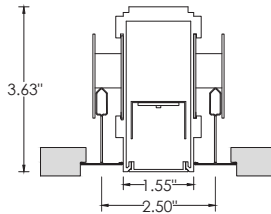

**9ST - 9/16" SLOT TEE TEGULAR**



Grid ceiling fixtures ship with universal mounting brackets suitable for all ceiling types listed below. Refer to installation instruction

**QUICKSHIP RUN CHART**

RUN LENGTH	SECTION LENGTHS	RUN LENGTH	SECTION LENGTHS	RUN LENGTH	SECTION LENGTHS
4'	4'	12'	8'+4'	32'	8'+8'+8'+8'
5'	5'	16'	8'+8'	36'	8'+8'+8'+8'+4'
6'	6'	20'	8'+8'+4'	40'	8'+8'+8'+8'+8'
8'	8'	24'	8'+8'+8'	44'	8'+8'+8'+8'+8'+4'
10'	5'+5'	28'	8'+8'+8'+4'	48'	8'+8'+8'+8'+8'+8'