



2 LIGHT DOWNLIGHT, 3 LIGHT DOWNLIGHT
2” ADJUSTABLE DUAL,
2” ADJUSTABLE TRIPLE APERTURE

SQUARE TRIM

ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS	
NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)  LED INSERT  NEW CONSTRUCTION FRAME  BAR HANGERS (OPTIONAL)  DRIVER ENCLOSURES	


INSTRUCTION KEY	**INFORMATION**
⚠ ADDITIONAL ⓘ ATTENTION POWER ON POWER OFF	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING

3G LIGHTING


2 LIGHT DOWNLIGHT, 3 LIGHT DOWNLIGHT
2" ADJUSTABLE DUAL, 2" ADJUSTABLE TRIPLE APERTURE
SQUARE TRIM

INSTALLATION INSTRUCTIONS

1 BAR HANGER INSTALLATION
(IF SUPPLIED BY 3G)

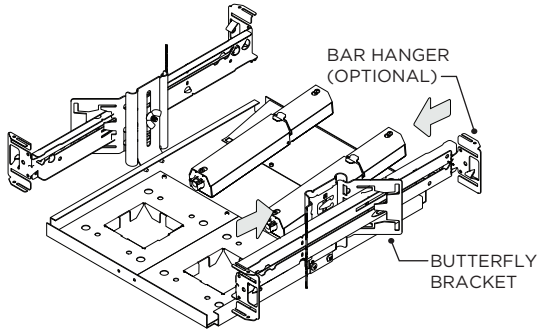


2

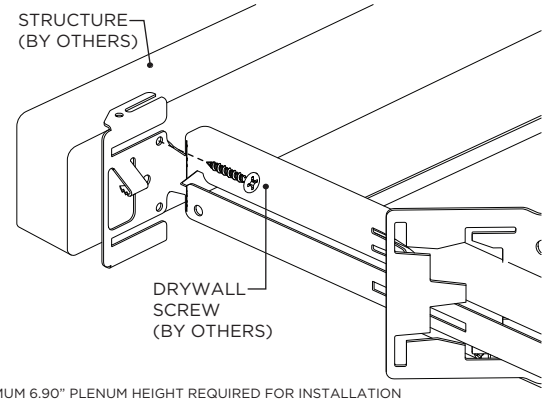


MINIMUM 6.90" PLENUM HEIGHT REQUIRED FOR INSTALLATION

3 OTHER BAR HANGER INSTALLATION
(NOT PROVIDED BY 3G)

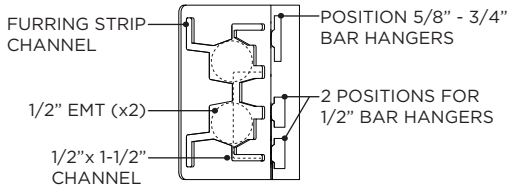


BUTTERFLY BRACKET
SIDE VIEW

4

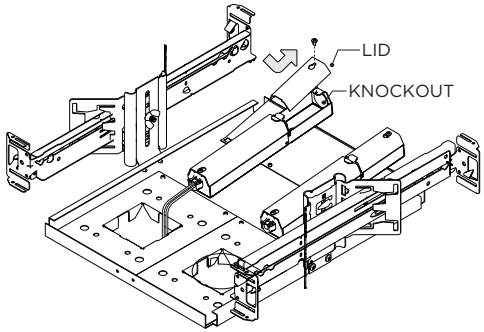

REMOVE LID AND KNOCKOUT FROM DRIVER ENCLOSURE

5

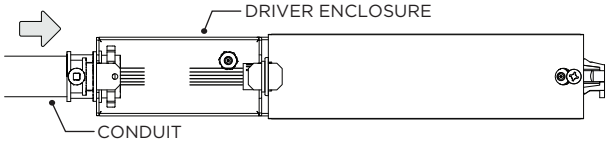


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

CONNECT CONDUIT TO DRIVER ENCLOSURE AND MAKE WIRING CONNECTIONS


6 CEILING CUTOUT

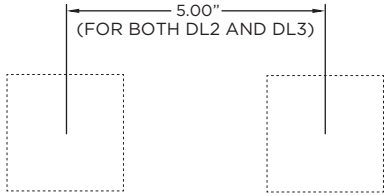


FIXTURE TYPE	CEILING HOLE SIZE
DL20RF	2.625" x 2.625"

INSTALL CEILING BELOW FIXTURE

7

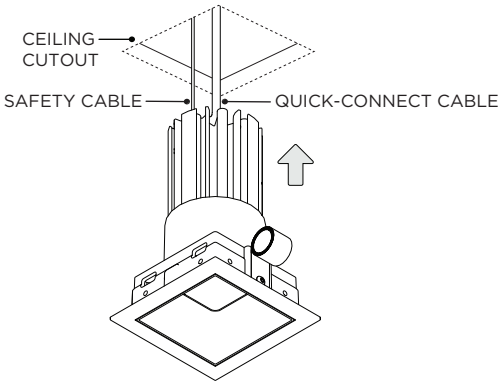


7A

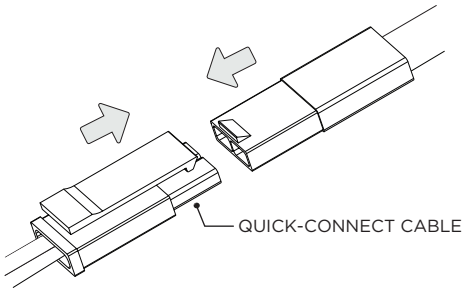


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY

7B

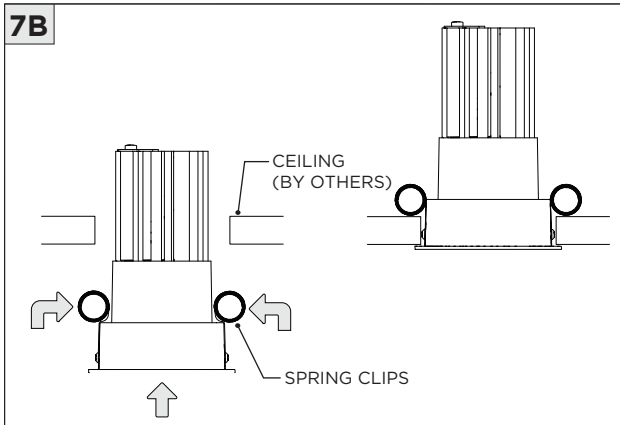


RMD - REMODEL WITH REMOTE DRIVER ENCLOSURE

1 REMOTE DRIVER WIRING

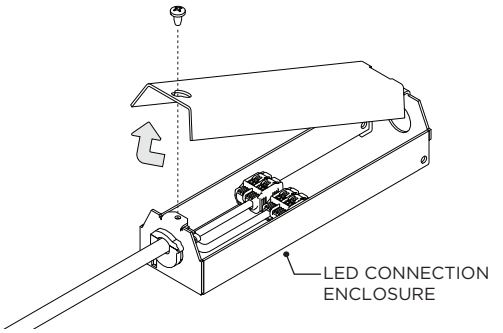

FOR REMOTE EMR DRIVER BOX, MAKE WIRED CONNECTIONS INSIDE PROVIDED LED CONNECTION ENCLOSURE


2

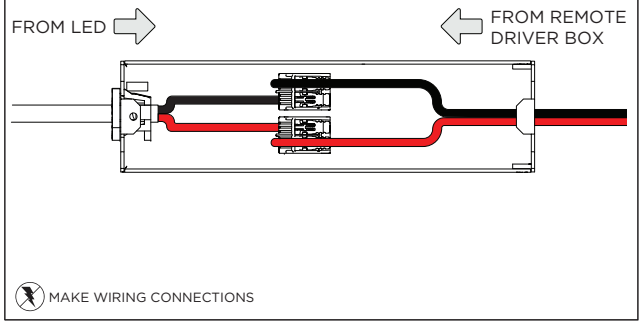

MAKE WIRING CONNECTIONS


LED ADJUSTMENT

1

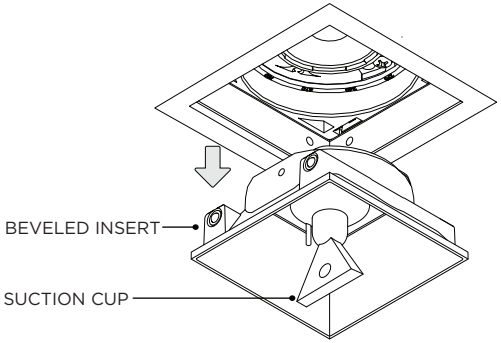

REMOVE BEVELED INSERT FROM CEILING WITH PROVIDED SUCTION CUP


2

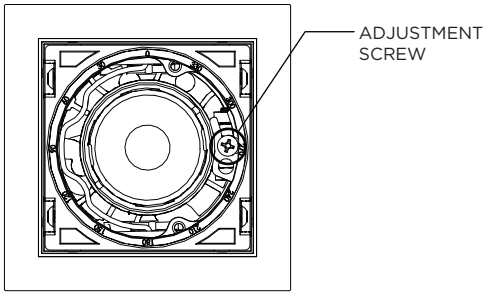

BOTTOM VIEW


ROTATE SCREW TO ADJUST LED ANGLE

2A

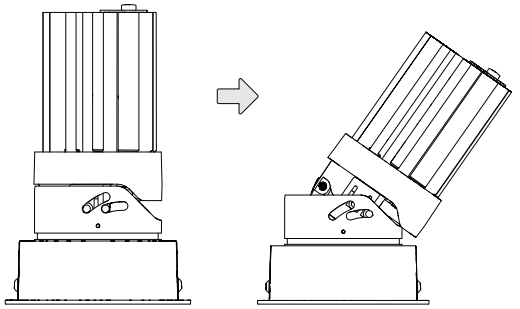


LED SERVICING

1

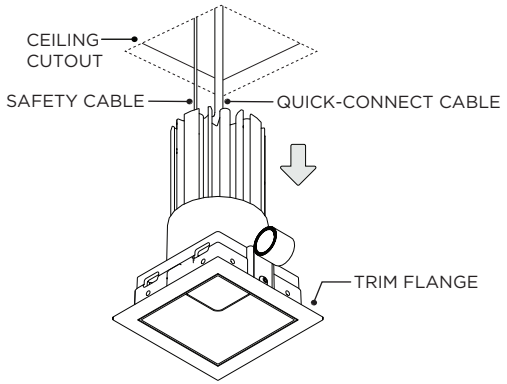


REMOVE LED ASSEMBLY FROM CEILING BY PULLING DOWN ON TRIM FLANGE

1A

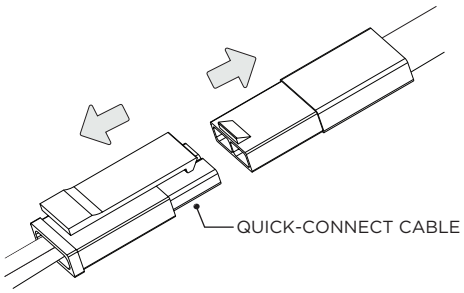


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

2

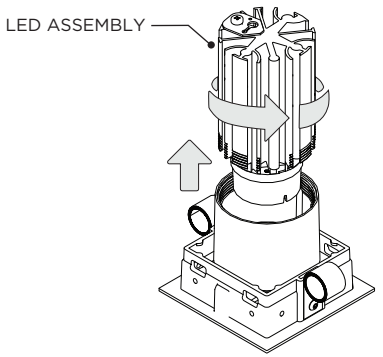


3

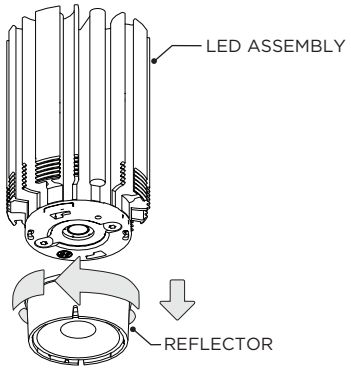

REMOVE REFLECTOR AND REPLACE LED ASSEMBLY


DRIVER SERVICING

1

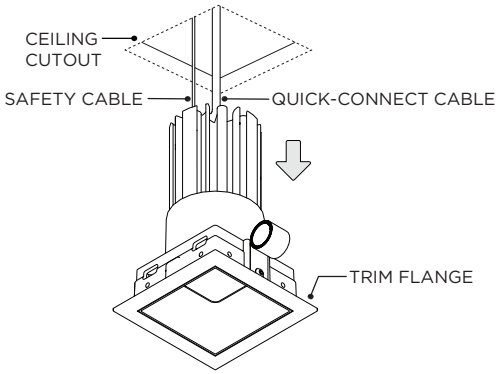


DISCONNECT POWER BEFORE SERVICING
REMOVE LED ASSEMBLY FROM CEILING BY PULLING DOWN ON TRIM FLANGE

1A

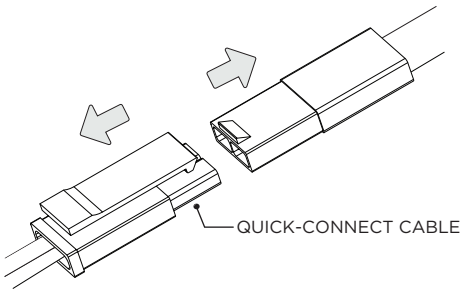

DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

2

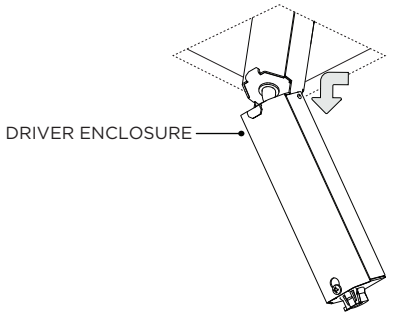

3

