


2 LIGHT DOWNLIGHT, 3 LIGHT DOWNLIGHT
3” ADJUSTABLE DUAL,
3” ADJUSTABLE TRIPLE APERTURE

ROUND TRIM

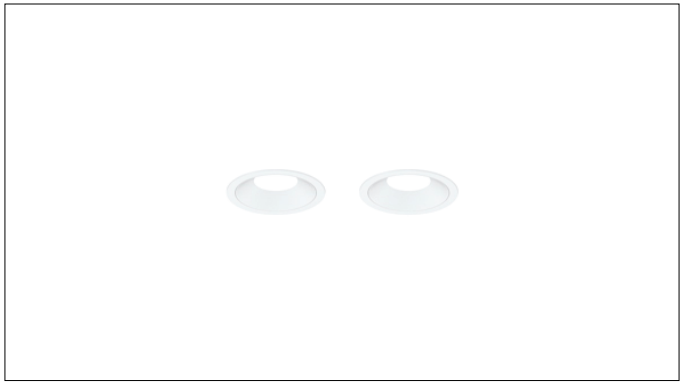

ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS	
NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)  NEW CONSTRUCTION HOUSING  BAR HANGERS (OPTIONAL)  LED INSERT	


INSTRUCTION KEY	**INFORMATION**
⚠ ADDITIONAL ⓘ ATTENTION POWER ON POWER OFF	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING

3G LIGHTING


2 LIGHT DOWNLIGHT, 3 LIGHT DOWNLIGHT
3" FIXED ADJUSTABLE, 3" ADJUSTABLE TRIPLE APERTURE
ROUND TRIM

INSTALLATION INSTRUCTIONS


1 BAR HANGER INSTALLATION
(IF SUPPLIED BY 3G)

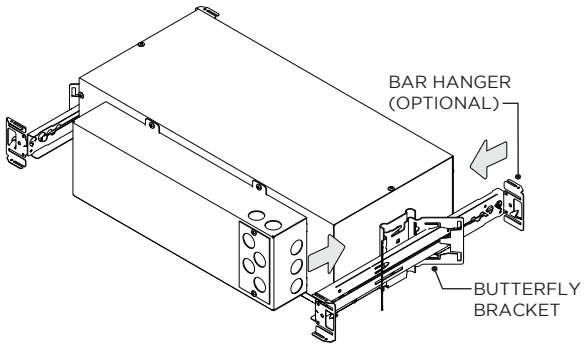

2

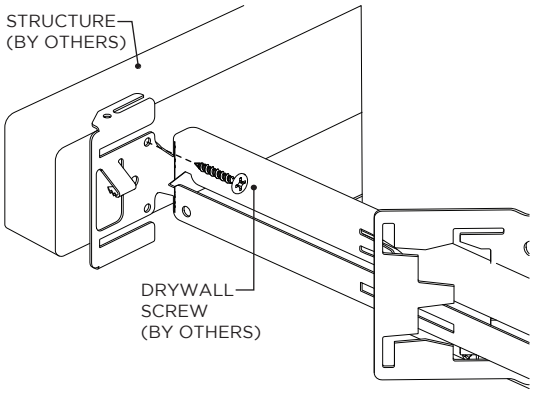


3 OTHER BAR HANGER INSTALLATION
(NOT PROVIDED BY 3G)

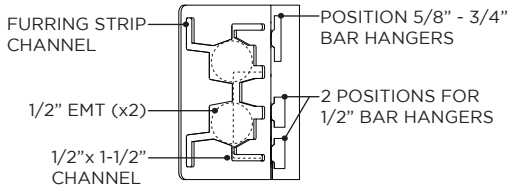


BUTTERFLY BRACKET
SIDE VIEW

4

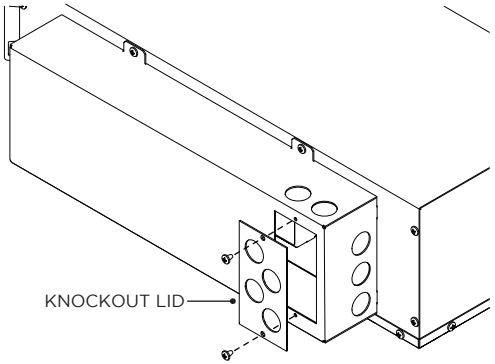

5

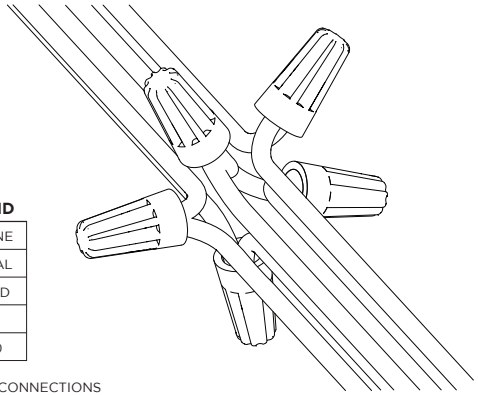


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS


6 CEILING CUTOUT

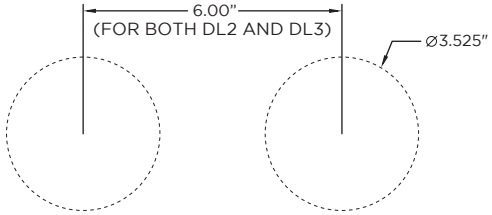


FIXTURE TYPE	CEILING HOLE SIZE
DL33RF	Ø3.525"

INSTALL CEILING BELOW FIXTURE

7

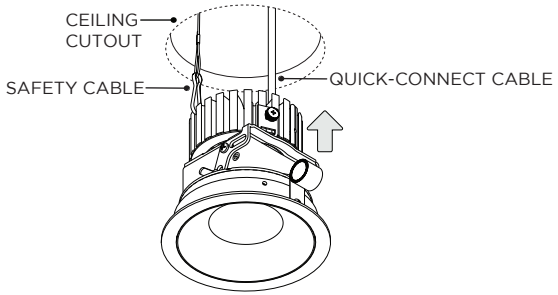


7A

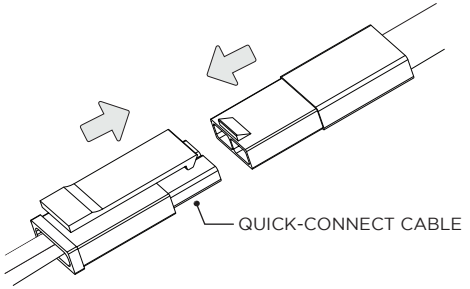


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY

7B

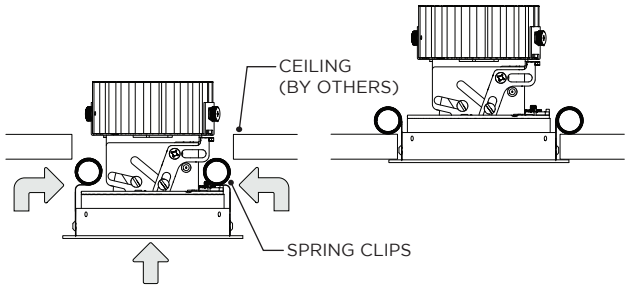


RMD - REMODEL WITH REMOTE DRIVER ENCLOSURE

1 REMOTE DRIVER WIRING

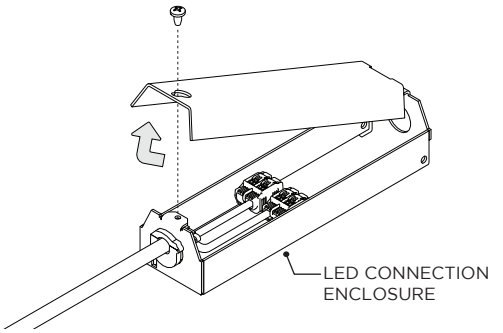

FOR REMOTE EMR DRIVER BOX, MAKE WIRED CONNECTIONS INSIDE PROVIDED LED CONNECTION ENCLOSURE


2

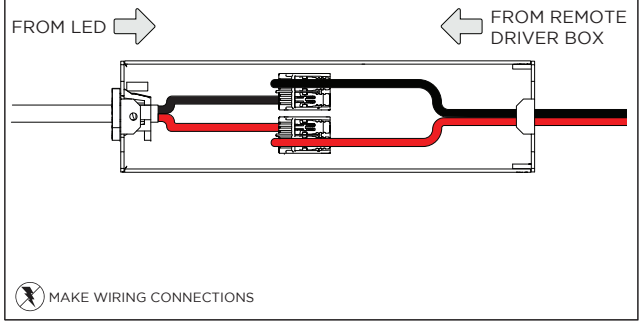

MAKE WIRING CONNECTIONS


LED ADJUSTMENT

1

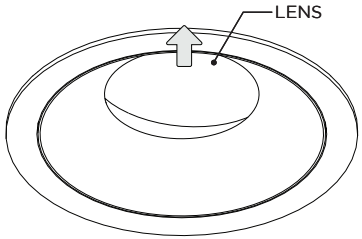


PUSH UP LENS WITH FINGER AND PULL DOWN TO REMOVE INSERT

1A

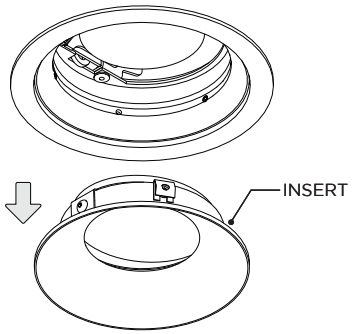


2 ANGLE ADJUSTMENT

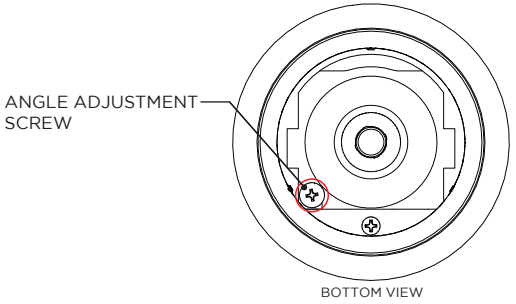


TURN SCREW TO ADJUST LED ANGLE

2A

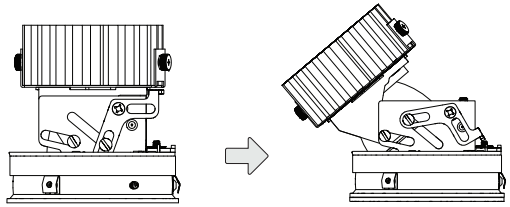


3 ROTATION ADJUSTMENT

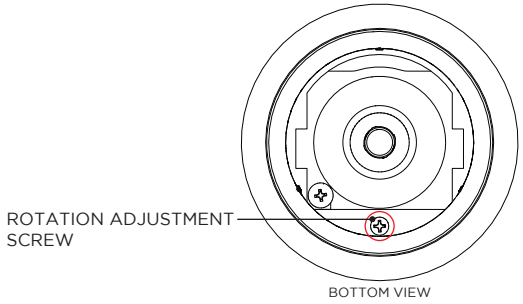

LOOSEN SCREW TO UNLOCK LED ASSEMBLY ROTATION
TIGHTEN SCREW AFTER ROTATING LED ASSEMBLY


LED SERVICING

1

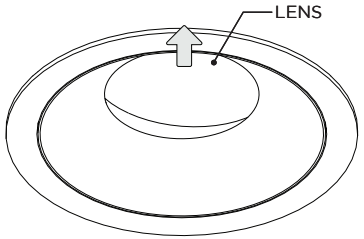


PUSH UP LENS WITH FINGER AND PULL DOWN TO REMOVE INSERT

1A

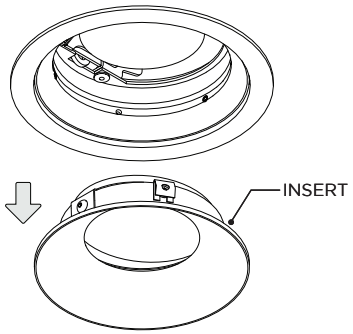


2

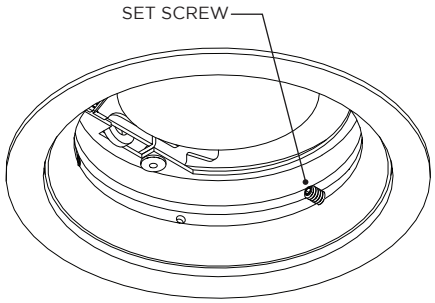


LOOSEN THREE SET SCREWS INSIDE ADAPTER RING

2A

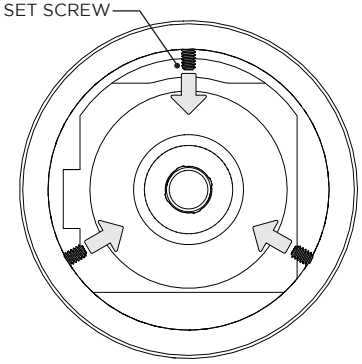


BOTTOM VIEW

3

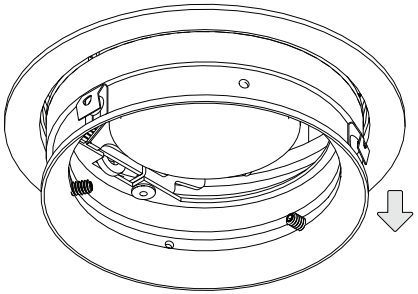


UNCLIP ADAPTER RING FROM CEILING BY PULLING DOWN ON EACH SET SCREW

4

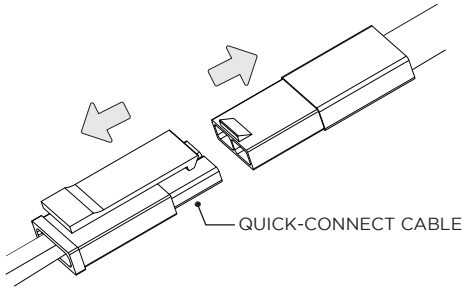


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

5

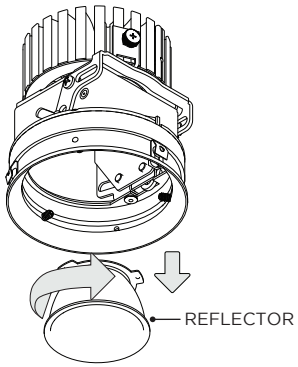


6

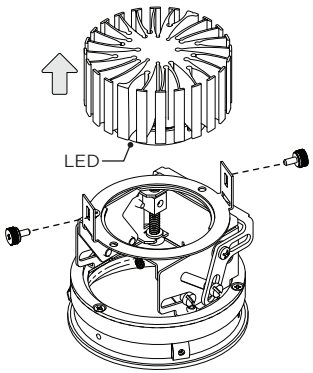


DRIVER SERVICING

1

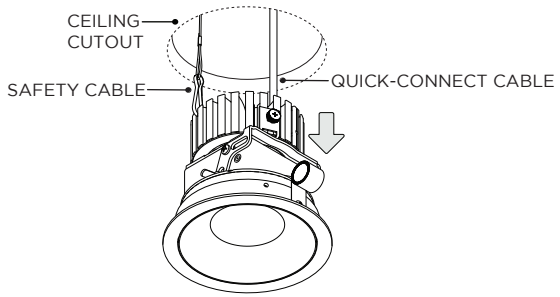


1A

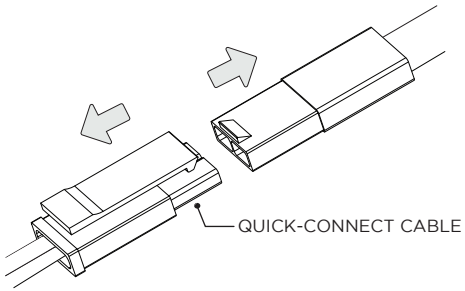


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

2

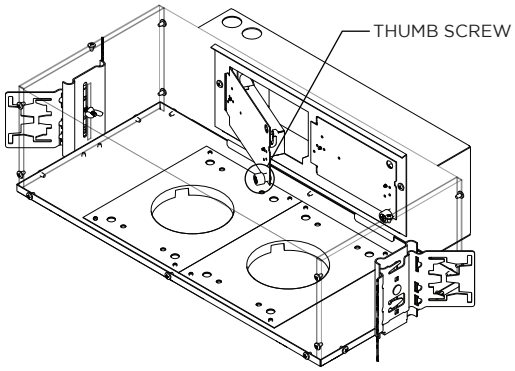


LOOSEN THUMB SCREW AND REMOVE DRIVER PLATE FROM CEILING

3

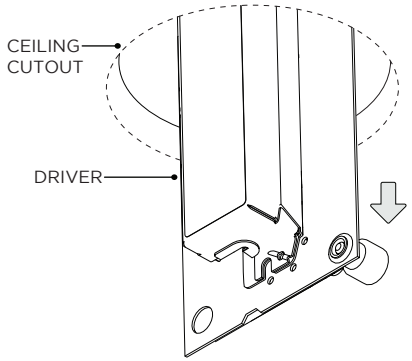

4

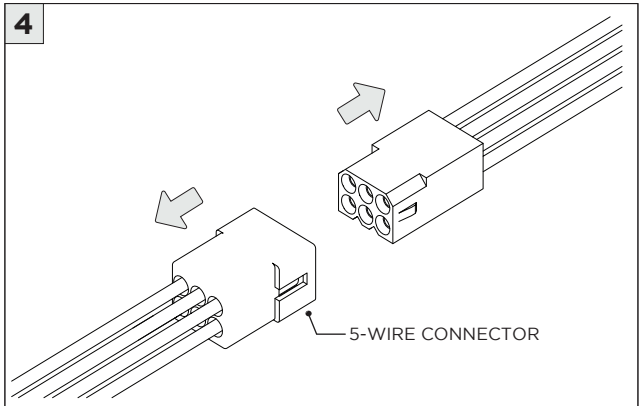

DISCONNECT 5-WIRE CONNECTOR