




# 3GQ-SDL45RF

4.5" DOWNLIGHT CYLINDER

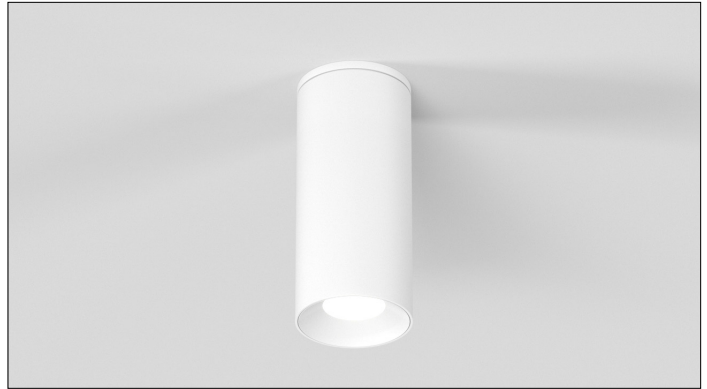

4.5" diameter high performance cylinder  
 Companion to 3G-DL45R series downlight family  
 Extruded aluminum housing with powder coated finish  
 Twist and lock construction and no visible hardware  
 Regressed LED source for enhanced glare control  
 Lumen range up to 3000lm (80+, 90+, and 97+ CRI options)  
 1% dimming standard with several integral driver options

**10 DAY QUICKSHIP**  
 MAX ORDER SIZE: 50 pcs

<b>PROJECT:</b>		<b>TYPE:</b>	
<b>CATALOG#:</b>		<b>DATE:</b>	<b>QTY:</b>

CAT. NO	FIXTURE HEIGHT	LUMEN OUTPUT	CRI	COLOR TEMP	BEAM ANGLE
<b>3GQ-SDL45RF</b>	<b>7H</b> - 7" HEIGHT *	<b>10</b> - 1000 LUMENS	<b>S80</b> - 80+ CRI	<b>30K</b> - 3000K	<b>20D</b> - 20°
	<b>11H</b> - 11" HEIGHT	<b>15</b> - 1500 LUMENS	<b>H90</b> - 90+ CRI	<b>35K</b> - 3500K	<b>40D</b> - 40°
		<b>22</b> - 2200 LUMENS		<b>40K</b> - 4000K	<b>60D</b> - 60°
		<b>30</b> - 3000 LUMENS			<b>90D</b> - 90° *
	<small>*7H available up to 2200lm</small>				<small>*90D reflector supplied standard with lens</small>


VOLTAGE	DRIVER	HOUSING FINISH	INSERT FINISH
<b>UNV</b> - 120/277V <b>120</b> - 120V	<b>DIM</b> - 0-10V (100-1%) <b>LE</b> - PHASE DIM (TRIAC/ELV, 100-1%)	<b>WH</b> - WHITE <b>BK</b> - BLACK <b>SV</b> - SILVER	<b>WI</b> - WHITE <b>BI</b> - BLACK <b>SI</b> - SILVER

OPTIONS
<b>SF</b> - SOFTENING LENS (SUPPLIED STANDARD)
<b>EMR</b> - EMERGENCY BATTERY (REMOTE)

Refer to standard specification sheets for complete details. Please note that only options shown above qualify for 10 day 3GQ program



**RECESSED 4" OCTAGONAL JUNCTION BOX BY OTHERS**

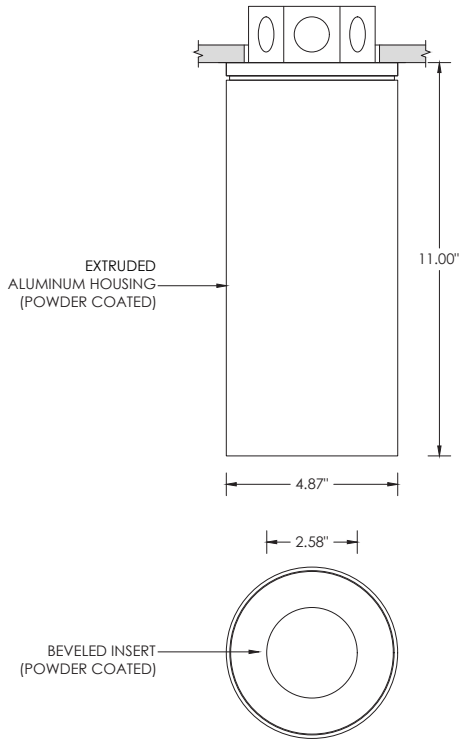

**SURFACE MOUNTED 4" OCTAGONAL JUNCTION BOX BY OTHERS**

