

**Recessed Kubo:** Square and linear architectural recessed luminaires featuring white sandblasted acrylic diffusers that are fabricated with mitered corners. The acrylic is fully saturated with various lamp sources including compact fluorescent, white LED, static colors, and color changing LEDs. The acrylic diffuser protrudes 1" below the ceiling plane with a 1/2" reveal creating a unique glow.

**8" SINGLE TRIM**




**8" SINGLE TRIMLESS**



**FAMILY LUMINAIRE**

Single Kubo




Linear Kubo



Pendant Kubo



Recessed Linia



**CONSTRUCTION**

- New construction housing and electrical enclosure constructed in cold rolled steel and powder coated matte white
- White sandblasted acrylic diffuser fabricated with mitered corners
- Trimless model features an aluminum mudding flange with a unique 1/2" inner reveal that emulates drywall to create a perfect looking cut-out every time
- Trim model features a 3/4" removable trim assembly with an inner sleeve to conceal hardware
- Acrylic diffuser protrudes 1" below the ceiling plane and features a 1/2" reveal creating a unique glow
- A ceiling thickness of 1/2" to 1 1/2" can be accommodated

**LAMP ASSEMBLY**

- Available in compact fluorescent, white LEDs, static color LEDs, and color changing LEDs
- Each lamp source fully saturates the acrylic diffuser

**ELECTRICAL**

- Integral electronic ballast for compact fluorescent
- Integral electronic driver for white LEDs and static color LEDs
- Color changing LEDs must be connected to a remote 3G power supply and controller
- Fluorescent and LED dimming options available
- Removable diffuser assembly allows for access to ballast or driver for easy maintenance
- Fixtures are thermally protected and rated for through branch wiring

**MOUNTING**

- Suitable for drywall, acoustic, wood, and various architectural ceilings
- Butterfly brackets and C Channel bars included

PROJECT


TYPE

DATE




CATALOG #

TRIM DETAIL

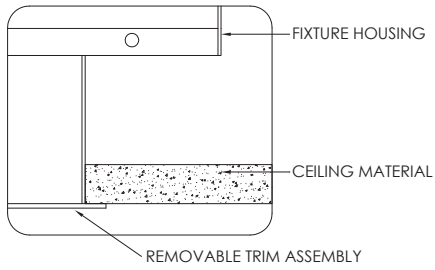

TRIMLESS DETAIL

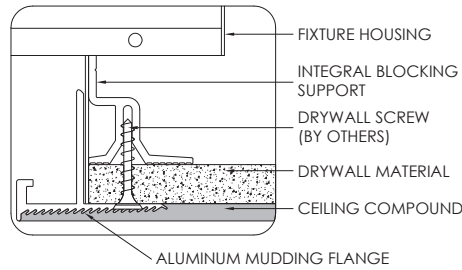


LED COLOR CHANGING (PG. 452)


- COLOR CHANGING LED (LEDCC) MODELS MUST BE CONNECTED TO A 3G 24V LED CONTROLLER
- CONSULT FACTORY FOR CUSTOM CONFIGURATIONS



TRIM

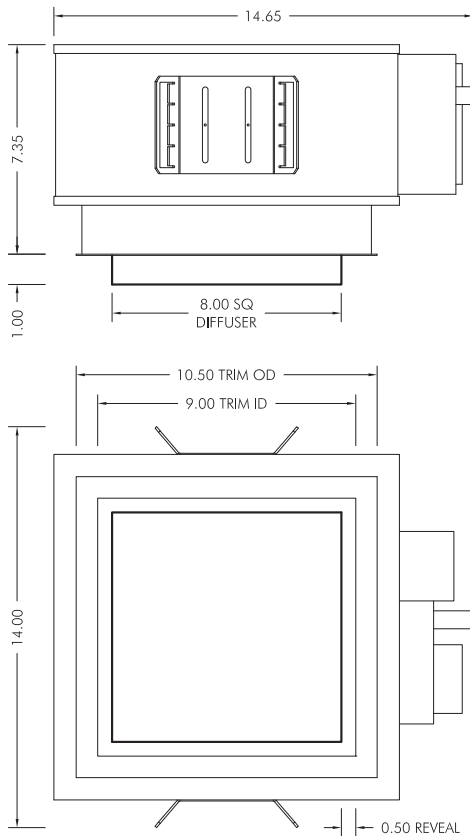

TRIMLESS

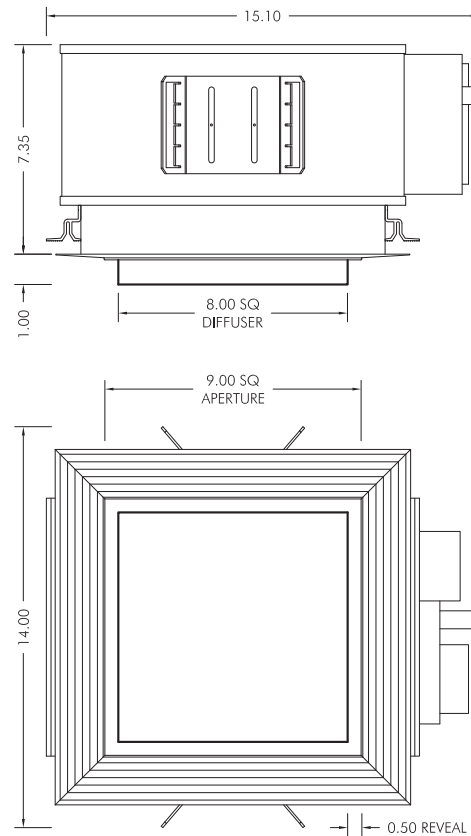

ORDERING INFORMATION



CAT. NO	LAMP SOURCE (SELECT ONE)		LED COLOR TEMPERATURE	VOLTAGE	BALLAST / DRIVER	FLANGE TYPE
	COMPACT FLUORESCENT	LED				
3G-RKU801	18CFL - 18W CFL TRIPLE TUBE	12LED - 12W WHITE	30K - 3000K (LED)	120 - 120V	E - ELECTRONIC	XTR - TRIMLESS
	26CFL - 26W CFL TRIPLE TUBE	LEDX - SINGLE COLOR LEDCC - COLOR CHANGING	35K - 3500K (LED)	277 - 277V 347 - 347V (CFL ONLY)	DIM - DIMMING (SPECIFY) DHL - DIMMING (LUTRON HI-LUME 3D®) DECO - DIMMING (LUTRON ECO SYSTEM®) RMT - REMOTE (LEDCC ONLY)	WT - WHITE TRIM

NOTE: Dimming available for CFL and LEDW only  
Dimming not available for 347V

3G-RKU801

ORDERING EXAMPLE 3G-RKU801-26CFL-120-E-XTR