



3GQ-2PLI-D

2" LINEAR PENDANT
DIRECT

2" aperture with one piece extruded aluminum housing
 DLC listed with performance up to 139 lumens per watt
 Individual or continuous runs available (see quickship run chart)
 Direct distribution with lumen outputs ranging from 250lm/ft to 1000lm/ft
 Universal voltage, 0-10V integral drivers with 100-1% dimming range
 Suitable for drywall, grid, wood, and other architectural ceilings
 Extruded acrylic lens with optimal performance and glare control



10 DAY QUICKSHIP
 MAX ORDER SIZE: 400'




PROJECT:		TYPE:	
CATALOG#:		DATE:	QTY:

CAT. NO	LUMEN OUTPUT	CRI	COLOR TEMP	VOLTAGE	DRIVER
3GQ-2PLI-D	D250 - 250 LM/FT D500 - 500 LM/FT D750 - 750 LM/FT D1000 - 1000 LM/FT	S80 - 80+ CRI H90 - 90+ CRI	30K - 3000K 35K - 3500K 40K - 4000K	UNV - 120/277V	DIM - 0-10V (100-1%)

LENS OPTION	FINISH	CABLE LENGTH	RUN TYPE
FL - FLUSH DASY - ASYMMETRIC	WH - WHITE BK - BLACK	60 - 60" 120 - 120" Clear braided cable	S - _____ (STRAIGHT RUN) * Individual fixtures available in 4', 5', 6' and 8' Continuous runs starting at 10' and 12' Runs longer than 12' available in 4' increments (16', 20', 24' etc)



Refer to standard specification sheets for complete details. Please note that only options shown above qualify for 10 day 3GQ program

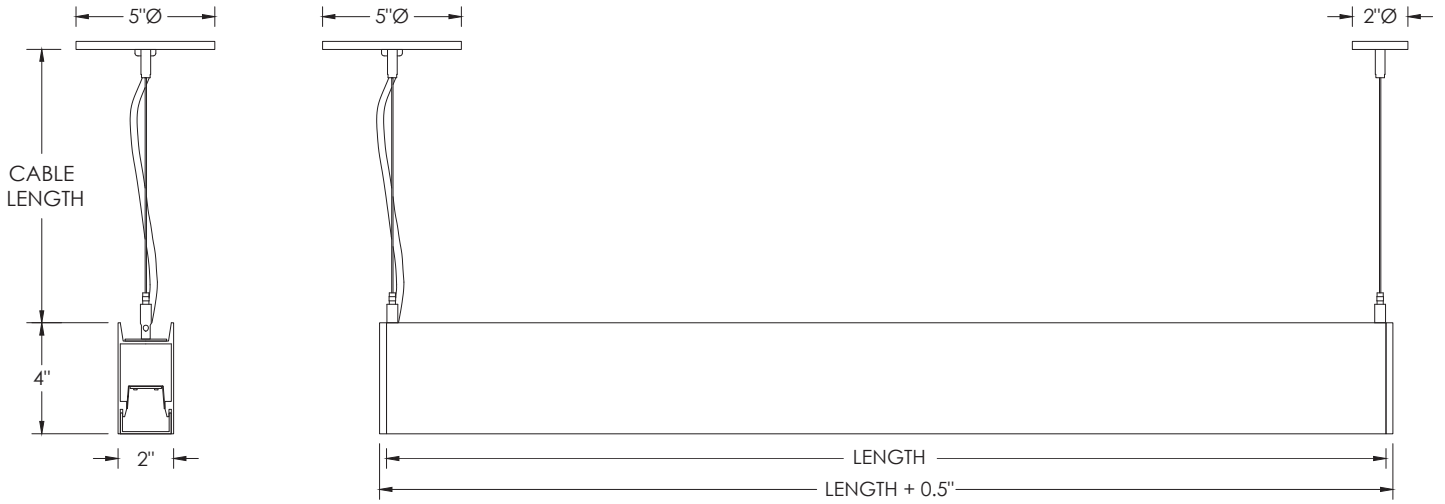

LENS OPTION

FL - FLUSH

DASY - ASYMMETRIC



QUICKSHIP RUN CHART

RUN LENGTH	SECTION LENGTHS
4'	4'
5'	5'
6'	6'
8'	8'
10'	5'+5'

RUN LENGTH	SECTION LENGTHS
12'	8'+4'
16'	8'+8'
20'	8'+8'+4'
24'	8'+8'+8'
28'	8'+8'+8'+4'

RUN LENGTH	SECTION LENGTHS
32'	8'+8'+8'+8'
36'	8'+8'+8'+8'+4'
40'	8'+8'+8'+8'+8'
44'	8'+8'+8'+8'+8'+4'
48'	8'+8'+8'+8'+8'+8'