

Universal voltage, 0-10V driver with 100-1% dimming range

Shallow housing available along with other housing options

4.5" round, adjustable high performance downlight
Proprietary hot aiming mechanism with sliding center beam optimization
0° - 40° lockable tilt and 362° lockable rotation
Regressed LED source for enhanced glare control
Lumen range up to 3000lm
2 SDCM, Citizen LED source available in 30K and 35K (80+ CRI)

10 DAY QUICKSHIP
Max Order Size: 50 pcs

ORDERING INFORMATION								
PROJECT:					TYPE:	TYPE:		
CATALOG #:		DATE:						
CAT. NO	LUMEN OUTPUT		CRI	COLOR TEMP	BEAM ANGLE		VOLTAGE	
3GQ-DL45RA	10 - 1000 l 15 - 1500 22 - 2200 30 - 3000	LUMENS LUMENS	\$80 - 80+ CRI	30K - 3000K 35K - 3500K	20D - 20° 40D - 40° 60D - 60°		UNV - 120/277V	
DRIVER		FLANGE TYPE		BEVELED INSERT		HOUSING TYPE		
DIM - 0-10V (STANDARD 100-1%)		WT - WHITE TRIM XTR - TRIMLESS (MUD-IN DRYWALL)		WI - WHITE		RMD - REMODEL (NON-IC) NCF - NEW CONSTRUCTION FRAME (NON-IC) NC - NEW CONSTRUCTION HOUSING (CP RATED) IC - NEW CONSTRUCTION IC HOUSING 1		
OPTIONS								
SF70 - SOFTENING LENS (SUPPLIED STANDARD) CP - CHICAGO PLENUM ² BH - C-CHANNEL BAR HANGERS								

- 1 IC Housing available up to 2200lm
- 2 Chicago Plenum option available with New Construction Housing

Refer to standard specification sheets for complete details. Please note that only options shown above qualify for 10 day 3GQ program DECEMBER 12, 2023








4.5" ROUND ADJUSTABLE - DOWNLIGHT

TRIM HOUSING OPTIONS

RMD - Remodel (Non-IC)

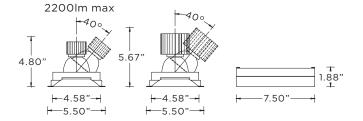










NCF - New Construction Frame (Non-IC)



NC - New Construction Housing (Non-IC) (Chicago Plenum Rated)


IC - IC Housing (2200lm max)







TRIMLESS HOUSING OPTIONS

RMD - Remodel (Non-IC)

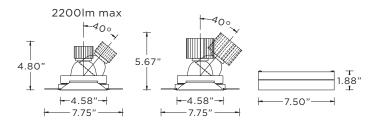



NCF - New Construction Frame (Non-IC)



NC - New Construction Housing (Non-IC) (Chicago Plenum Rated)

IC - IC Housing (2200lm max)

