


3GQ 3GQ-4RLI

3.5" RECESSED LINEAR

3.5" aperture with one piece extruded aluminum housing
 Individual or continuous runs available in 1' increments
 Lumen outputs ranging from 250lm/ft to 1000lm/ft
 80+ CRI LED system available in 3000K and 3500K
 Universal voltage, 0-10V integral drivers with 100-1% dimming range
 Suitable for drywall, grid, wood, and other architectural ceilings
 Extruded acrylic lens with optimal performance and glare control

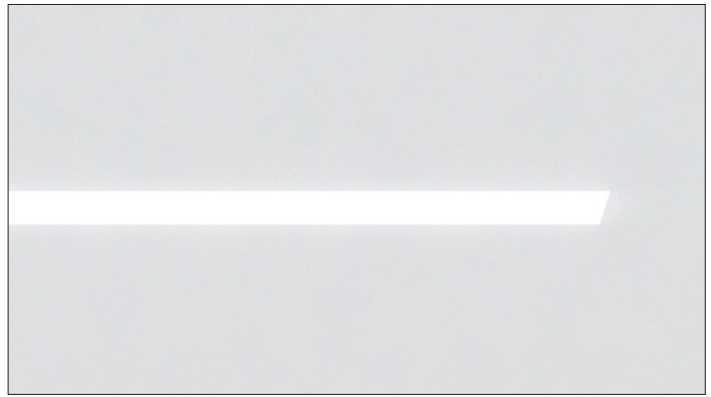

10 DAY QUICKSHIP
Max Order Size: 400'

ORDERING INFORMATION

PROJECT:	<input type="text"/>	TYPE:	<input type="text"/>
CATALOG #:	<input type="text"/>	DATE:	<input type="text"/>

CAT. NO	LUMEN OUTPUT	CRI	COLOR TEMP	VOLTAGE
3GQ-4RLI	L250 - LOW OUTPUT (250 LM/FT) L500 - MEDIUM OUTPUT (500 LM/FT) L750 - HIGH OUTPUT (750 LM/FT) L1000 - VERY HIGH OUTPUT (1000 LM/FT)	S80 - 83+ CRI	30K - 3000K 35K - 3500K	UNV - 120/277V

DRIVER	FLANGE TYPE	LENS OPTION	OPTIONS
DIM - 0-10V (STANDARD 100-1%)	WT - WHITE TRIM XTR - TRIMLESS FX - FLANGELESS GCX - GRID CEILING (UNIVERSAL MOUNT)* <small>*Grid ceiling fixtures ship with universal mounting brackets suitable for all ceiling types. See mounting section for details.</small>	FL - FLUSH	CP - CHICAGO PLENUM

LENGTH (FEET)
S - ___' (STRAIGHT RUN)* <small>* Individual units available in 2', 3', 4', 5', 6' and 8' 2' not available for grid ceiling version Continuous runs available in 1' increments as standard. Contact 3G for 1" increments</small>

Refer to standard specification sheets for complete details. Please note that only options shown above qualify for 10 day 3GQ program MAR 3, 2021




3GQ-4RLI


3.5" RECESSED LINEAR

DRAWING AND DIMENSIONS


WT - TRIM

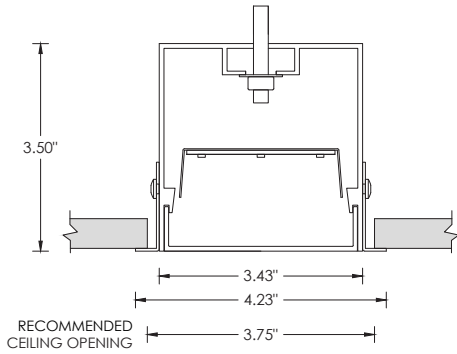

XTR - TRIMLESS

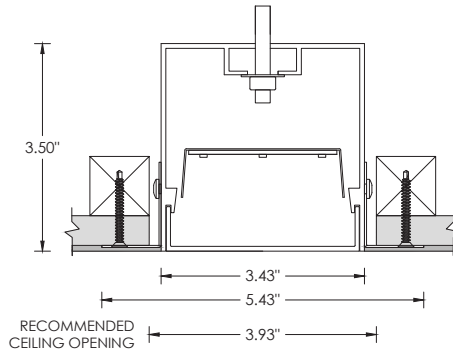


FX - FLANGELESS

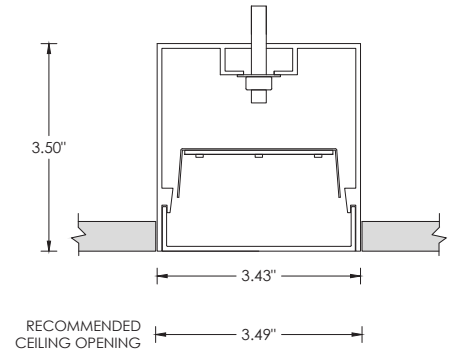


GRID CEILING MOUNTING TYPES


9L - 9/16" LAYIN

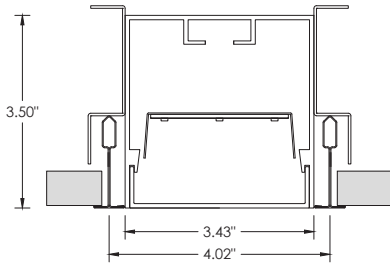


9TG - 9/16" TEGULAR

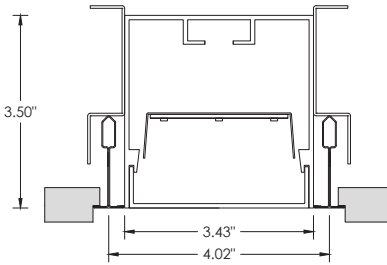


9TP - 9/16" TEGULAR

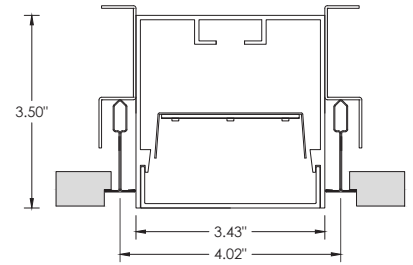


15L - 15/16" LAYIN

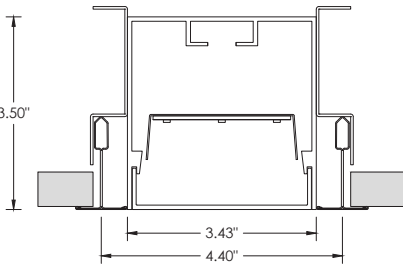


15TG - 15/16" TEGULAR

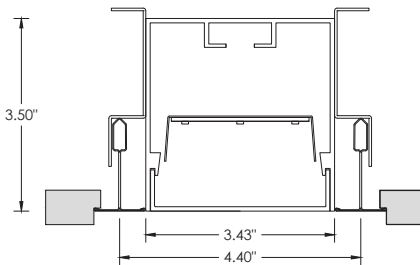

15TP - 15/16" TEGULAR

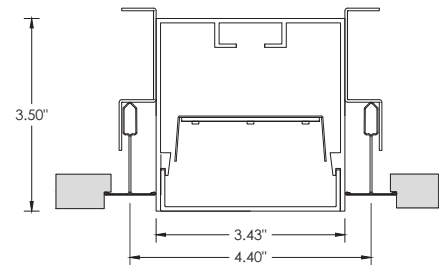

9ST - 9/16" SLOT TEE TEGULAR / 4" TECH ZONE

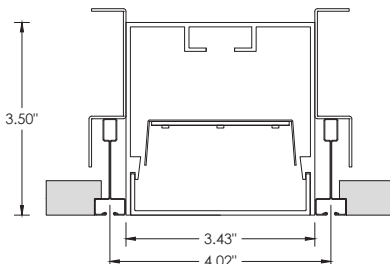

Grid ceiling fixtures ship with universal mounting brackets suitable for all ceiling types listed below. Refer to installation instruction



Copyright 2019 3G Lighting | www.3glighting.com | P: 905-850-2305 TF: 888-448-0440
3G reserves the right to change, without notice, specifications or materials for product improvement.





3GQ-4RLI

3.5" RECESSED LINEAR

TYPICAL RUN CHART (CONTINUOUS RUNS)

Run Length	Section Lengths
9'	5'+4'
10'	5'+5'
11'	8'+3'
12'	8'+4'
13'	8'+5'
14'	8'+6'
15'	8'+7'
16'	8'+8'
17'	8'+5'+4'
18'	8'+5'+5'
19'	8'+8'+3'
20'	8'+8'+4'
21'	8'+8'+5'
22'	8'+8'+6'
23'	8'+8'+7'
24'	8'+8'+8'
25'	8'+8'+5'+4'
26'	8'+8'+5'+5'
27'	8'+8'+8'+3'
28'	8'+8'+8'+8'
29'	8'+8'+8'+5'
30'	8'+8'+8'+6'
31'	8'+8'+8'+7'
32'	8'+8'+8'+8'
33'	8'+8'+8'+5'+4'
34'	8'+8'+8'+5'+5'
35'	8'+8'+8'+8'+3'
36'	8'+8'+8'+8'+4'
37'	8'+8'+8'+8'+5'
38'	8'+8'+8'+8'+6'
39'	8'+8'+8'+8'+7'
40'	8'+8'+8'+8'+8'
41'	8'+8'+8'+8'+5'+4'
42'	8'+8'+8'+8'+5'+5'
43'	8'+8'+8'+8'+8'+3'
44'	8'+8'+8'+8'+8'+4'
45'	8'+8'+8'+8'+8'+5'
46'	8'+8'+8'+8'+8'+6'
47'	8'+8'+8'+8'+8'+7'
48'	8'+8'+8'+8'+8'+8'
49'	8'+8'+8'+8'+8'+5'+4'
50'	8'+8'+8'+8'+8'+5'+5'

