

# PENDANT KUBO SINGLE

**3G-PKU**

**6", 8", 12" PENDANT**

**3G**  
LIGHTING



**Surface Kubo Single**



**24" Pendant Kubo**



**24" Surface Kubo**



**Pendant Linear Kubo**

## FEATURES

### CONSTRUCTION

- White sandblasted acrylic diffuser. Fabricated with mitered corners
- Fixture collar and mounting canopy fabricated in steel with powder coated finish
- Modified configurations available upon request

### ELECTRICAL

- Standard 120-277V, 0-10V dimmable driver with 100-1% dimming range.
- 85% efficiency and 0.9 power factor
- Lutron driver options available with 100-1% dimming range
- eldoLED Dali driver available with 100-1% dimming range

### LED SYSTEM

- Available in 27K, 30K, 35K, and 40K
- Average rated life of 60,000 hours
- Color consistency < 3 SDCM
- CRI > 80 for 27K, 30K, 35K, and 40K

### LUMEN MAINTENANCE

- L70 at 60,000 hours

### MOUNTING

- Suitable for various ceiling applications (see mounting details)
- Aircraft cable suspension with adjustable locking fasteners

### FINISH

- Standard polyester powder coated matte white finish. Optional matte silver finish

### LABELS

- ETL listed. Suitable for dry or damp locations (indoor use)

### WARRANTY


- 5 Year limited warranty.

PROJECT

TYPE

DATE

CATALOG #

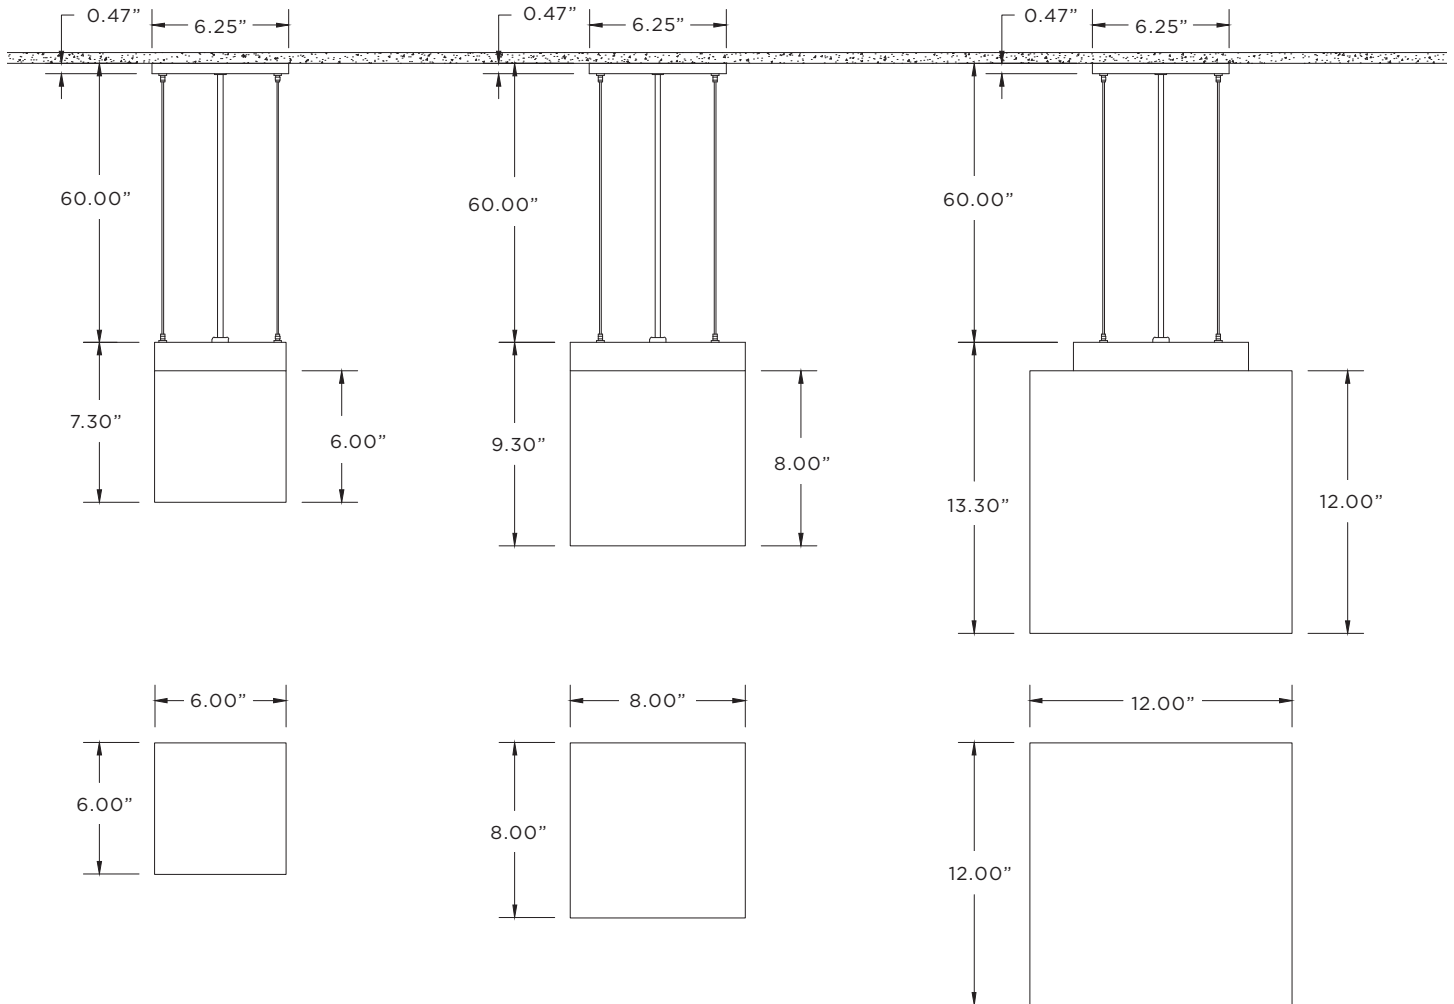

**ORDERING INFORMATION**

CAT. NO	SIZE	LED SYSTEM	COLOR TEMP	VOLTAGE	DRIVER	FINISH	CABLE LENGTH
<b>3G-PKU</b>	<b>601 - 6"</b>	<b>L2 - STANDARD</b> OUTPUT	<b>27K - 2700K</b>	<b>120 - 120V</b>	<b>DIM</b> - 0-10V (STANDARD 100-1%) <b>DHL</b> - LUTRON (3-WIRE - 100-1%) <b>DHL2</b> - LUTRON (ECOSYSTEM - 100-1%) <b>DALI</b> - DALI (100-1%)	<b>WH - WHITE</b> (STANDARD) <b>SV - SILVER</b>	<b>60 - 60"</b> (STANDARD) <b>120 - 120"</b>
	<b>801 - 8"</b>		<b>30K - 3000K</b>	<b>277 - 277V</b>			
	<b>1201 - 12"</b>	<b>L4 - HIGH</b> OUTPUT	<b>35K - 3500K</b>	<b>347 - 347V</b> (0-10V ONLY)			

**3G-PKU**

ORDERING EXAMPLE

**3G-PKU801-L2-30K-120-DIM-WH-60**

Copyright 2016 3G Lighting  
 P: 905-850-2305 F: 905-851-6490 | TF: 888-448-0440  
 3G reserves the right to change, without notice, specifications or materials for product improvement.



MADE IN NORTH AMERICA  
 ARRA COMPLIANT



# PENDANT KUBO SINGLE


**3G-PKU**  
**6", 8", 12" PENDANT**



## PERFORMANCE CHART (based on 3500K)

SIZE	LED SYSTEM	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY LM/W	IES FILES
6"	STANDARD OUTPUT	5.1W	460	90	<a href="#">DOWNLOAD</a>
	HIGH OUTPUT	11W	865	79	<a href="#">DOWNLOAD</a>
8"	STANDARD OUTPUT	11.5W	652	57	<a href="#">DOWNLOAD</a>
	HIGH OUTPUT	16.7W	856	51	<a href="#">DOWNLOAD</a>
12"	STANDARD OUTPUT	11.5W	670	59	<a href="#">DOWNLOAD</a>
	HIGH OUTPUT	16.7W	878	53	<a href="#">DOWNLOAD</a>

## MOUNTING

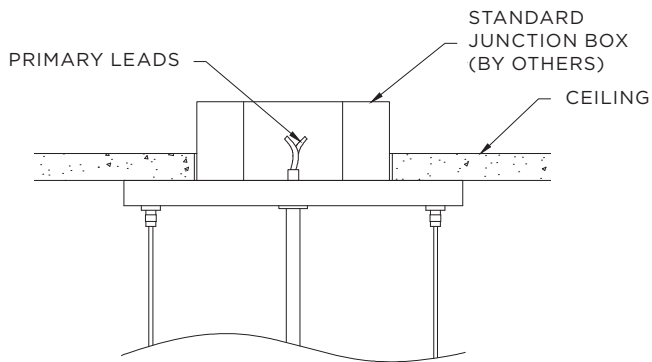

## NOTES