



3GQ-PDL45RF
4.5" DOWNLIGHT CYLINDER



4.5" diameter high performance cylinders
Companion to 3G-DL45R series downlight family
Extruded aluminum housing with powder coated finish
Twist and lock construction and no visible hardware
Regressed LED source for enhanced glare control
Lumen range up to 3000lm (80+ CRI options)
1% dimming standard with several integral driver options

10 DAY QUICKSHIP
Max Order Size: 50 pcs

ORDERING INFORMATION

PROJECT:	<input type="text"/>	TYPE:	<input type="text"/>
CATALOG #:	<input type="text"/>	DATE:	<input type="text"/>

CAT. NO	FIXTURE HEIGHT	LUMEN OUTPUT	CRI	COLOR TEMP	BEAM ANGLE
3GQ-PDL45RF	7H - 7" HEIGHT	10 - 1000 LUMENS	S80 - 80+ CRI	30K - 3000K	20D - 20°
	11H - 11" HEIGHT	15 - 1500 LUMENS	H90 - 90+ CRI	35K - 3500K	40D - 40°
		22 - 2200 LUMENS		40K - 4000K	60D - 60°
		30 - 3000 LUMENS			90D - 90° *

* 90D reflector supplied standard with lens

VOLTAGE	DRIVER	HOUSING FINISH	INSERT FINISH
UNV - 120/277V 120 - 120V	DIM - 0-10V (100-1%) LE - PHASE DIM (TRIAC/ELV, 100-1%)	WH - WHITE BK - BLACK SV - SILVER	WI - WHITE BI - BLACK SI - SILVER

CANOPY FINISH	SUSPENSION TYPE	SUSPENSION LENGTH	OPTIONS
WCN - WHITE (STANDARD) BCN - BLACK	WC - WHITE CABLE BC - BLACK CABLE	C60 - 60" CABLE C120 - 120" CABLE	EMR - EMERGENCY BATTERY (REMOTE)

All suspension options are field cuttable

Refer to standard specification sheets for complete details. Please note that only options shown above qualify for 10 day 3GQ program JULY 26, 2023



Copyright 2019 3G Lighting | www.3glighting.com | P: 905-850-2305 TF: 888-448-0440
3G reserves the right to change, without notice, specifications or materials for product improvement.






3GQ-PDL45RF

4.5" DOWNLIGHT CYLINDER


DRAWINGS AND DIMENSIONS 11" HEIGHT

**RECESSED J-BOX
(4" OCTAGONAL BY OTHERS)**


CABLE SUSPENSION

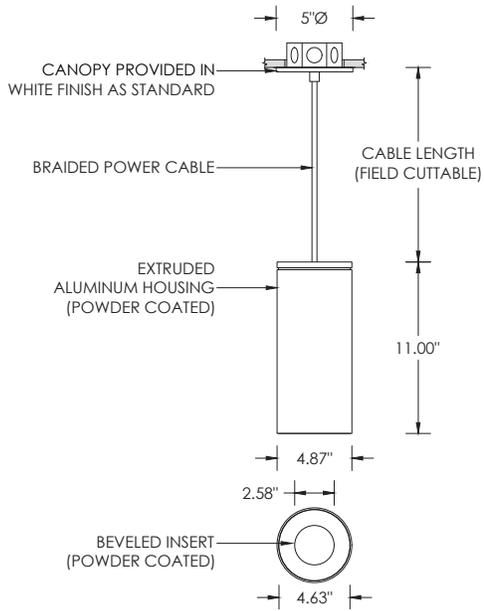

STEM SUSPENSION

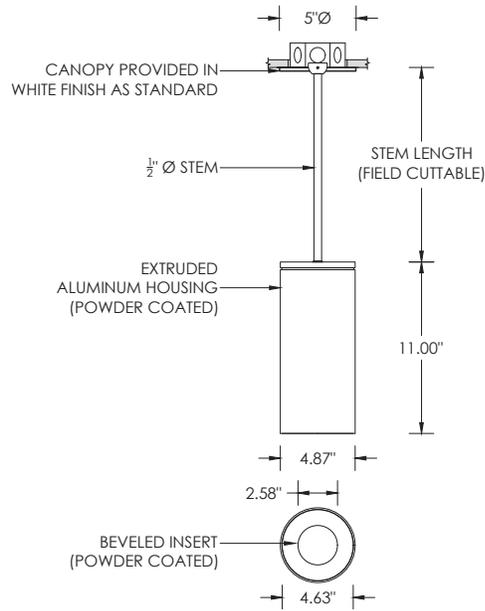


**SUITABLE FOR
SLOPED CEILING**




**SURFACE MOUNTED J-BOX
(4" OCTAGONAL BY OTHERS)**

CABLE SUSPENSION

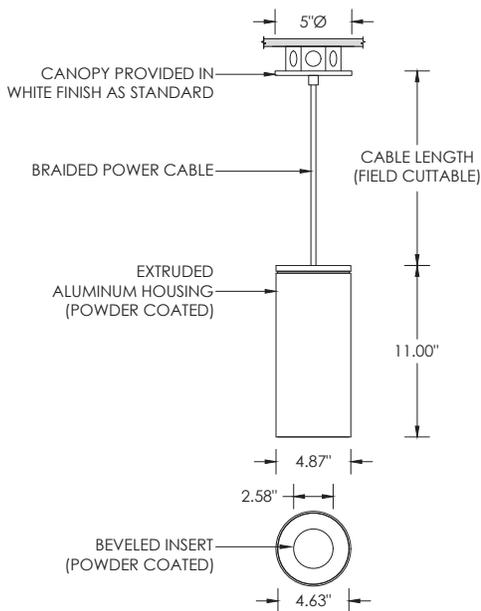

STEM SUSPENSION

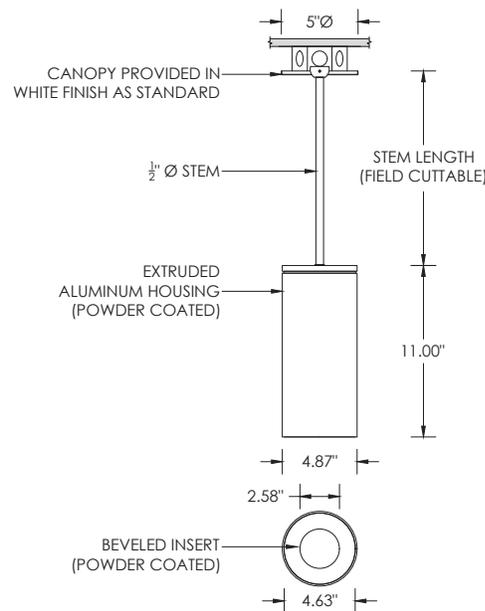

**SUITABLE FOR
SLOPED CEILING**

