

SURFACE LINIA

3G-4SLI
3.5" SURFACE

3G
LIGHTING



DD1



DD2



Pendant Linia



Wall Linia



Recessed Linia

FEATURES

CONSTRUCTION

- 3.5" extruded aluminum housing with machined aluminum end caps
- Individual units and continuous runs in 1' increments
- 24 gauge LED reflector with high reflectance white powder coated finish
- Extruded acrylic lens with satin finish available in flush and drop lens options

ELECTRICAL

- Standard 120-277V, 0-10V dimmable driver with 100-1% dimming range
- 85% efficiency and 0.9 power factor
- Lutron driver options available with 100-1% dimming range
- eLdoLED Dali driver available with 100-1% dimming range
- Emergency Battery: 90 minutes

LED SYSTEM

- Available in 27K, 30K, 35K, and 40K
- Average rated life of >50,000 hours
- Color consistency 3 SDCM
- CRI>80 for 27K, 30K, 35K, and 40K

LUMEN MAINTENANCE

- L70 at >50,000 hours

MOUNTING

- Suitable for drywall and wood ceilings (see mounting details)

FINISH

- Standard polyester powder coated matte white finish. Optional matte silver and black finish


LABELS

- ETL listed. Suitable for dry or damp locations (indoor use)

WARRANTY

- 5 Year limited warranty

PROJECT	TYPE	DATE
CATALOG #		

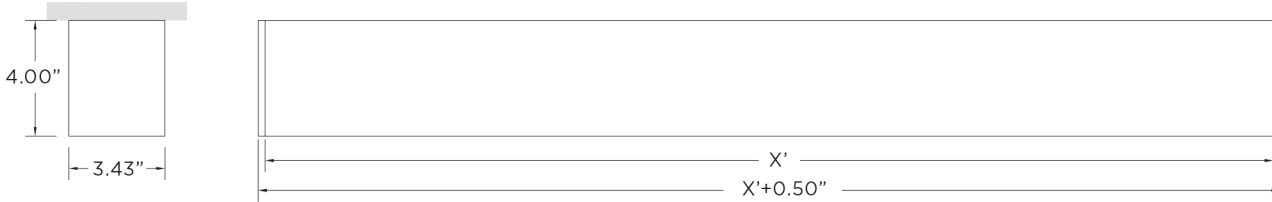


LENS OPTIONS

FL - FLUSH LENS

DD1 - 1" DROP LENS

DD2 - 2" DROP LENS



ORDERING INFORMATION

CAT. NO	LED SYSTEM	COLOR TEMP	VOLTAGE	DRIVER
3G-4SLI	L250 - LOW OUTPUT (250 LM/FT)	27K - 2700K	120 - 120V	DIM - 0-10V (STANDARD 100-1%)
	L500 - MEDIUM OUTPUT (500 LM/FT)	30K - 3000K	277 - 277V	DHL - LUTRON (3-WIRE-100-1%)
	L750 - HIGH OUTPUT (750 LM/FT)	35K - 3500K	347 - 347V (0-10V ONLY)	DHL2 - LUTRON (ECOSYSTEM-100-1%)
	L1000 - VERY HIGH OUTPUT (1000 LM/FT)	40K - 4000K		DALI - DALI (100-1%)

3G-4SLI				
----------------	--	--	--	--

LENS OPTIONS	FINISH	OPTIONS	LENGTH (FEET)
FL - FLUSH	WH - WHITE (STANDARD)	EM - EMERGENCY BATTERY (4' SECTION)	S - ___' (STRAIGHT RUN)*
DD1 - 1" DROP LENS	SV - SILVER		L - ___' X ___' (L-SHAPE)
DD2 - 2" DROP LENS	BK - BLACK		U - ___' X ___' X ___' (U-SHAPE)
			R - ___' X ___' (RECTANGLE/SQUARE)
*Individual units available in 3', 4', 5', or 8', continuous runs available in 1' increments.			

--	--	--	--

ORDERING EXAMPLE	3G-4SLI-L2-30K-120-DIM-FL-WH-S-8'
------------------	--

SURFACE LINIA


3G-4SLI
3.5" SURFACE

3G
LIGHTING

PERFORMANCE CHART (Based on 3500K, 4' length)

LENS OPTIONS	LED SYSTEM	WATTAGE/FT	LUMENS/FT	EFFICACY (LM/W)	IES FILES
FLUSH	L250 - LOW OUTPUT (250 LM/FT)	3.5W	336	96	DOWNLOAD
	L500 - MEDIUM OUTPUT (500 LM/FT)	5.25W	517	98	DOWNLOAD
	L750 - HIGH OUTPUT (750 LM/FT)	8.75W	888	101	DOWNLOAD
1" DROP	L250 - LOW OUTPUT (250 LM/FT)	3.5W	351	100	DOWNLOAD
	L500 - MEDIUM OUTPUT (500 LM/FT)	5.25W	541	103	DOWNLOAD
	L750 - HIGH OUTPUT (750 LM/FT)	8.75W	930	106	DOWNLOAD
2" DROP	L250 - LOW OUTPUT (250 LM/FT)	3.5W	345	99	DOWNLOAD
	L500 - MEDIUM OUTPUT (500 LM/FT)	5.25W	531	101	DOWNLOAD
	L750 - HIGH OUTPUT (750 LM/FT)	8.75W	913	104	DOWNLOAD

MOUNTING

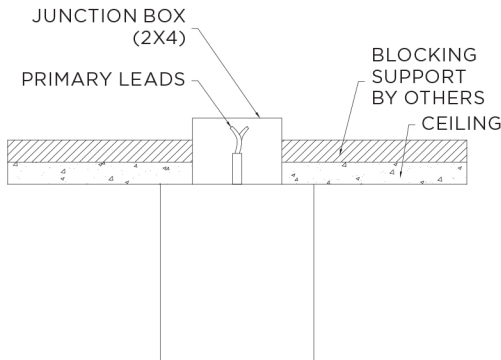

RUN CHART (Begin measurements at start of run, in a clockwise direction)

STRAIGHT (S-___')

ORDERING EXAMPLE:

3G-4SLI-L2-30K-120-DIM-FL-WH-S-8'




L SHAPE (L-___' x ___')


ORDERING EXAMPLE:

A - 3G-4SLI-L2-30K-120-DIM-FL-WH-L-8'x6'

B - 3G-4SLI-L2-30K-120-DIM-FL-WH-L-6'x8'

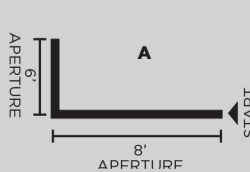

OR

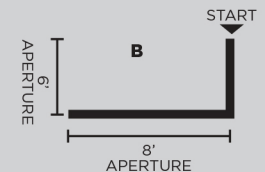


U SHAPE (U-___' x ___' x ___')


ORDERING EXAMPLE:

A - 3G-4SLI-L2-30K-120-DIM-FL-WH-U-4'x8'x6'

B - 3G-4SLI-L2-30K-120-DIM-FL-WH-U-6'x8'x4'

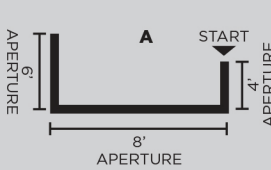

OR

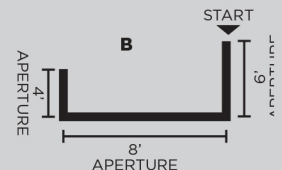

RECTANGLE/SQUARE (R-___' x ___')

ORDERING EXAMPLE:

3G-4SLI-L2-30K-120-DIM-FL-WH-R-8'x6'

