


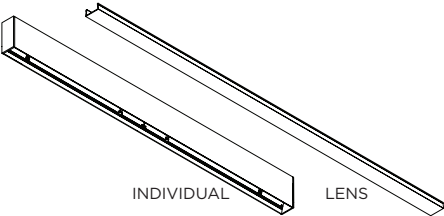
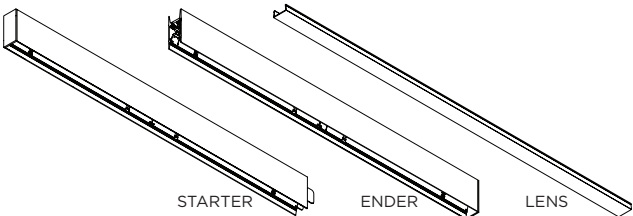
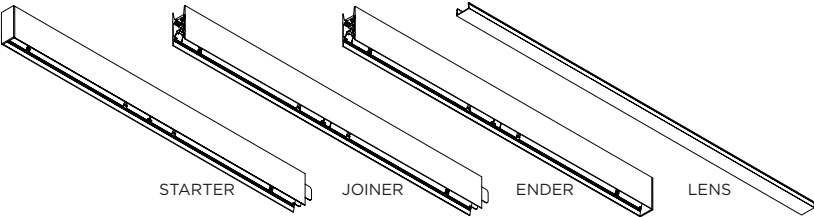








3G-1SLI, 3G-2SLI and 3G-4SLI
1.5", 2", and 3.5" SURFACE LINIA



 **FOR NEW CONSTRUCTION INSTALLATION ONLY**

FIXTURE TYPES			INCLUDED COMPONENTS	
1SLI PROFILE	2SLI PROFILE	4SLI PROFILE	Standalone Fixtures (2' to 8')	Continuous Runs (9' to 16')
				
Continuous Runs (17' and longer)				
				

INSTRUCTION KEY	INFORMATION
 ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING
 ATTENTION	
 POWER ON	
 POWER OFF	

1 FLUSH LENS REMOVAL

TERMINAL
SCREWDRIVER
(BY OTHERS)

LENS

2 FLUSH LENS REMOVAL

LENS

3

REFLECTOR CLIP

FLATHEAD SCREWDRIVER
(BY OTHERS)

i FOR RGBW REFLECTOR REMOVAL - SEE PAGE 3

4

REFLECTOR

FIXTURE ID &
CERTIFICATION LABEL

3G
LIGHTING

Date: 08/24

Section: 01 OF 1

5

1/4-20 THREADED ROD LOCATION
AT 5.00" FROM EACH END OF NOMINAL
LENGTH

2.75"
5.00"

POWER FEED ENTRY

HOLES FOR THREADED ROD

THREADED ROD LOCATION

3'	26"	6'	62"
4'	38"	7'	74"
5'	50"	8'	86"

6

CROSS SECTION OF GYPSUM BOARD MOUNT


NON-POWER FEED
THREADED ROD
(BY OTHERS)

POWER FEED
2" x 4" SLOTTED JUNCTION BOX
(BY OTHERS)

7

LABEL EXAMPLE

FIXTURE TYPE: L1
SECTION: 01 OF 4
TOTAL SECTIONS: 4

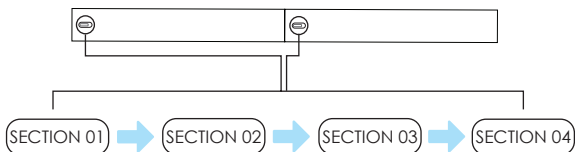

i IDENTIFY AND ARRANGE FIXTURES BY THEIR ID LABEL ON THE SIDE OF THE EXTRUSION BEFORE INSTALLATION

8

J-BOX
(BY OTHERS)



MAKE ELECTRICAL CONNECTIONS & FEED WIRES INTO J-BOX (BY OTHERS)

8A

WIRING LEGEND










BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM+)
PURPLE	(DIM-)

RGBW WIRING LEGEND

GREEN	GROUND
BLACK	LINE
WHITE	NEUTRAL
GREEN	DMX SHIELD
ORANGE	DMX -
PURPLE	DMX +




MAKE WIRING CONNECTIONS

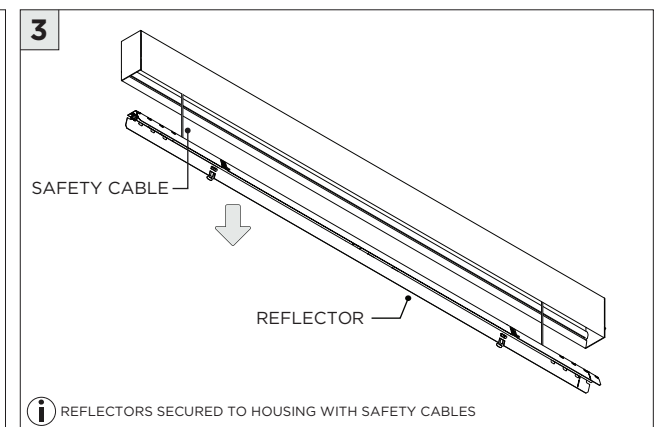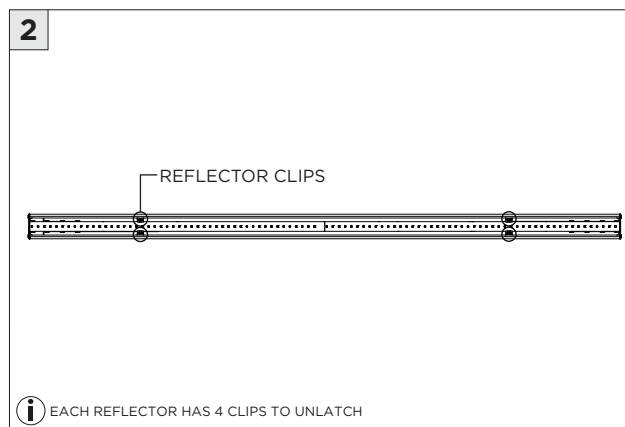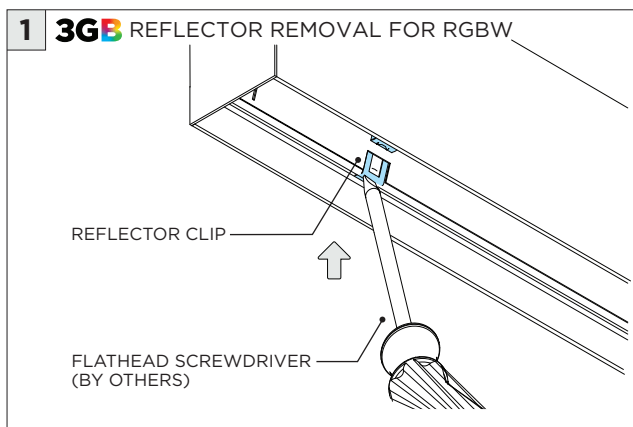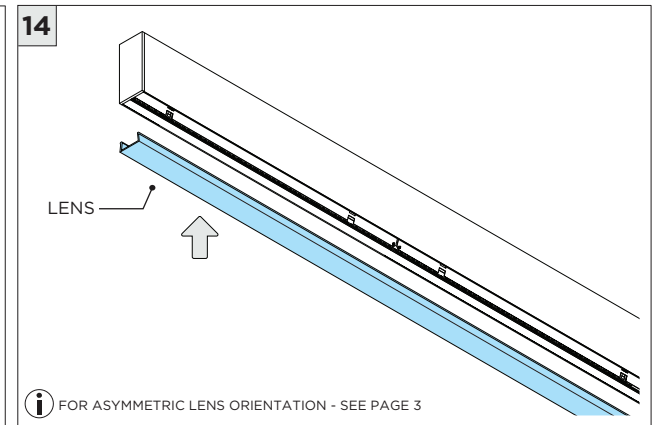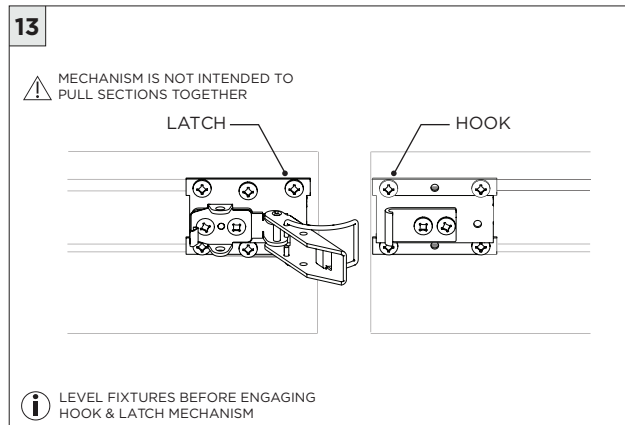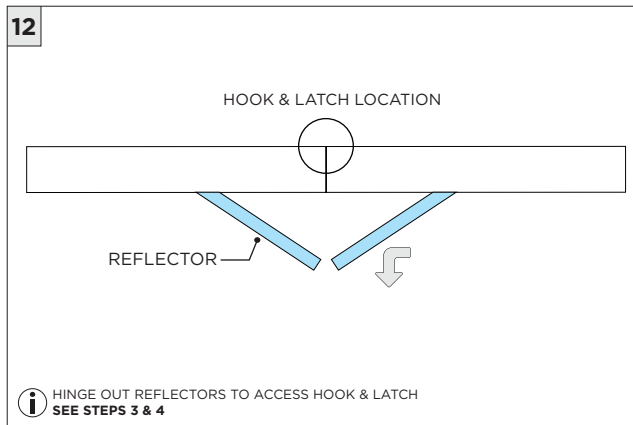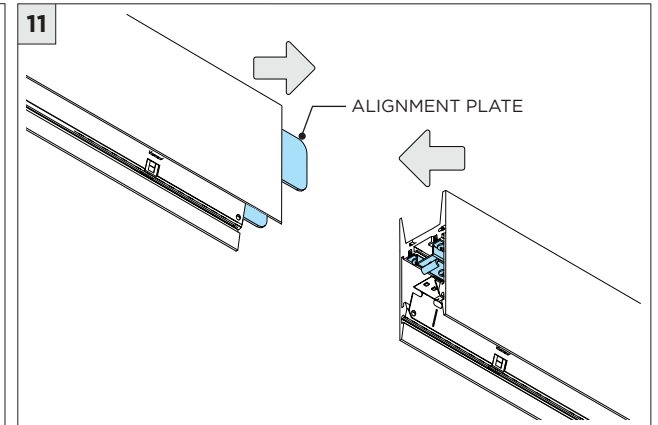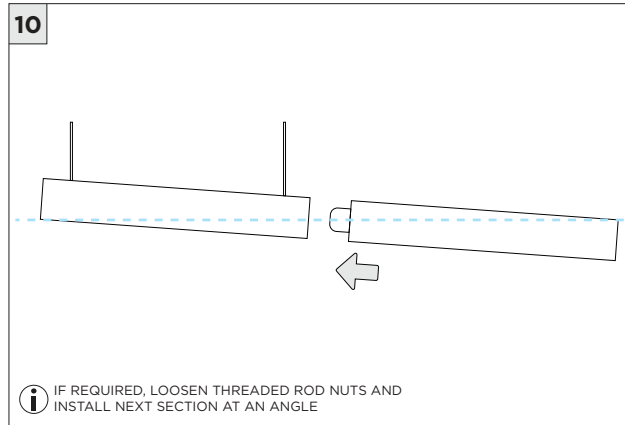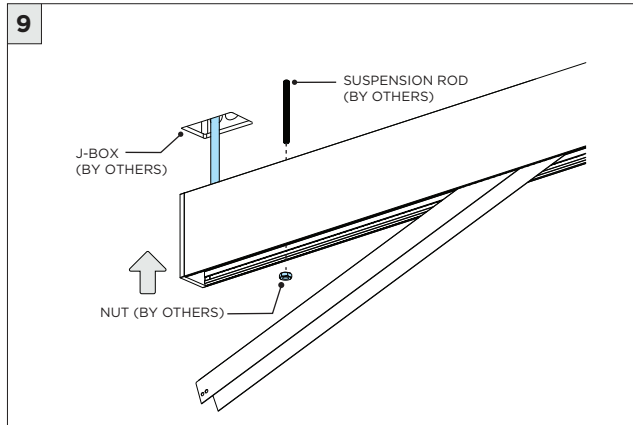


DRIVER SERVICING


1 FLUSH LENS REMOVAL

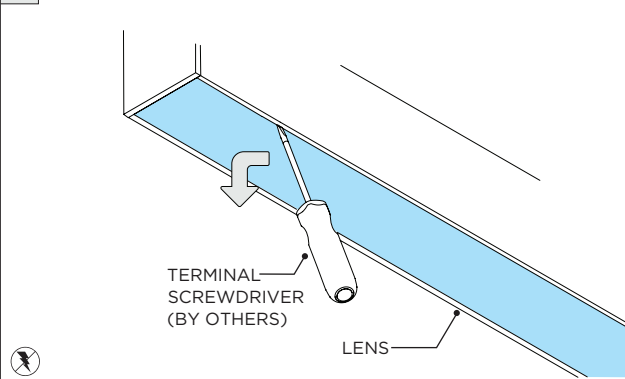

2

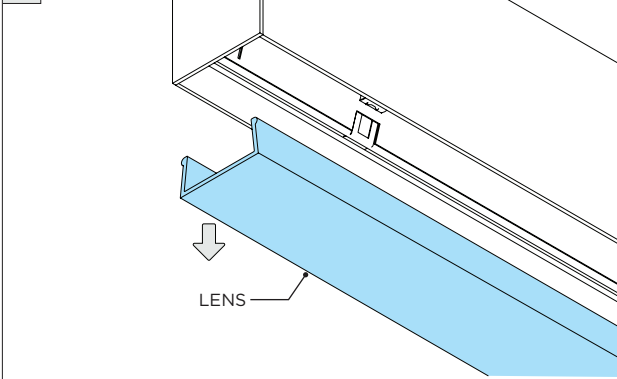


2A DROP LENS REMOVAL

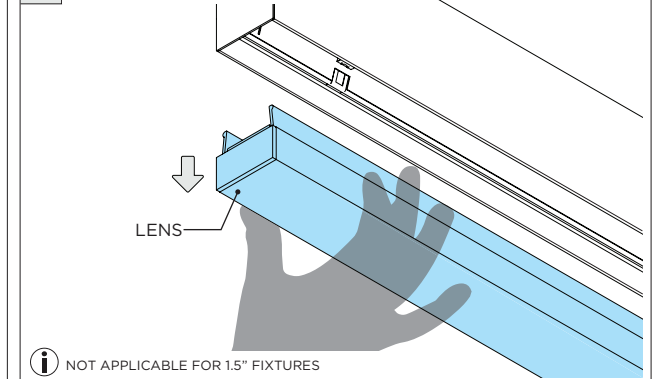


i NOT APPLICABLE FOR 1.5" FIXTURES

3

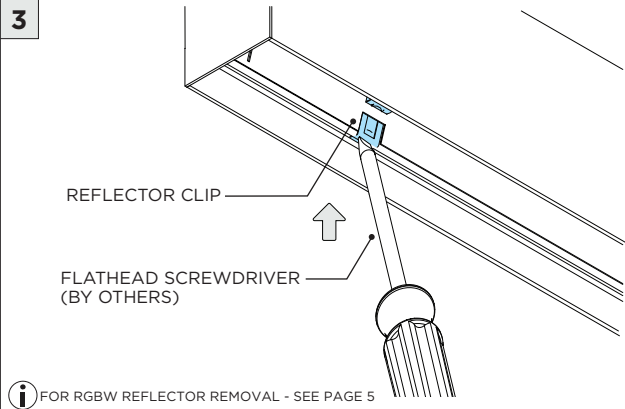


i FOR RGBW REFLECTOR REMOVAL - SEE PAGE 5

4

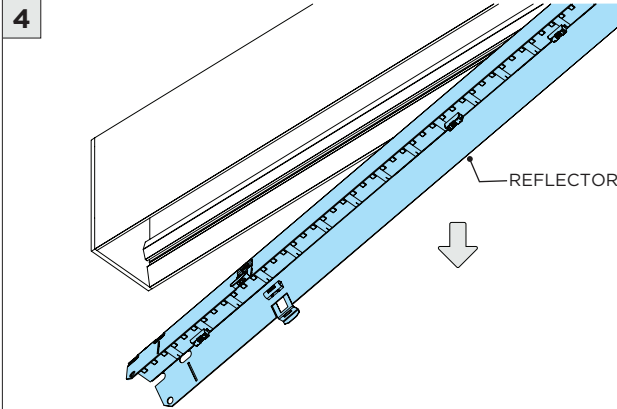


5

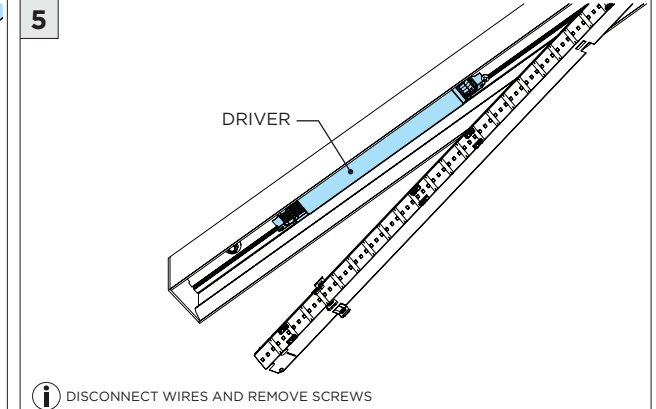


i DISCONNECT WIRES AND REMOVE SCREWS


6

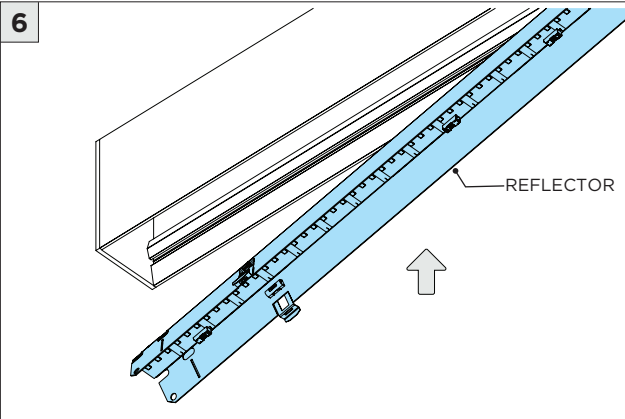

7

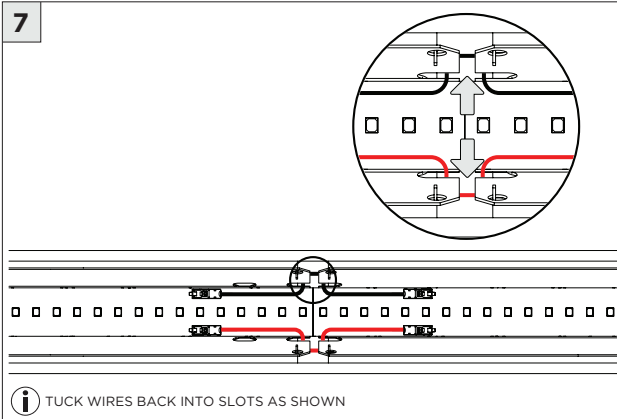


8

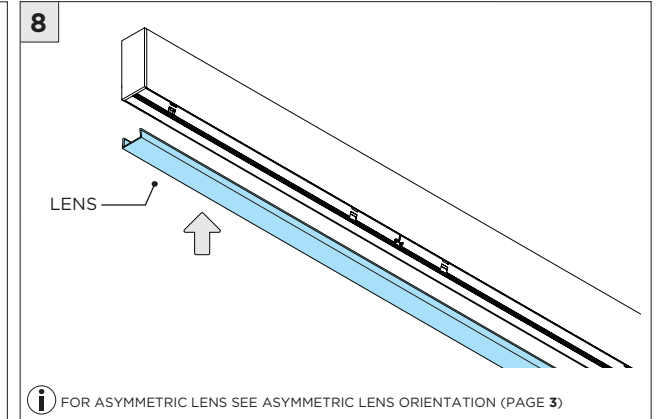


i FOR ASYMMETRIC LENS SEE ASYMMETRIC LENS ORIENTATION (PAGE 3)

DRIVER SERVICING

1 3GB REFLECTOR REMOVAL FOR RGBW

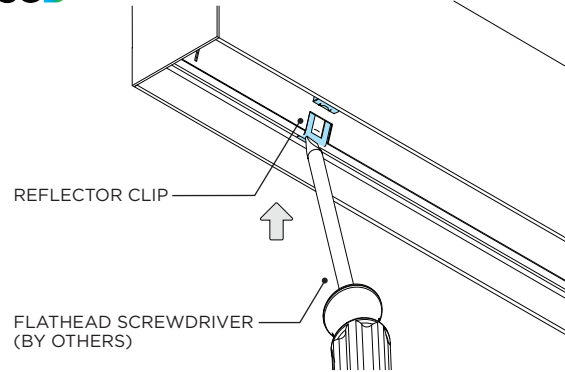


2












i EACH REFLECTOR HAS 4 CLIPS TO UNLATCH

3

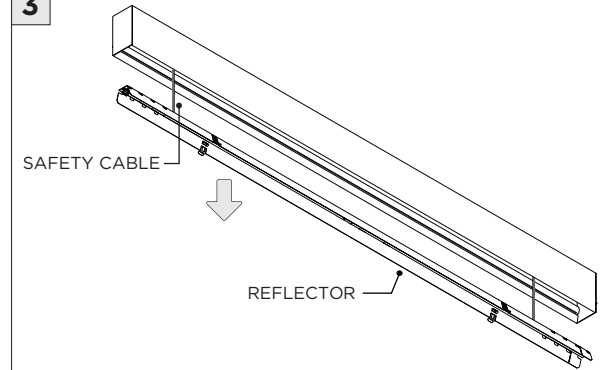

i REFLECTORS SECURED TO HOUSING WITH SAFETY CABLES

LED SERVICING

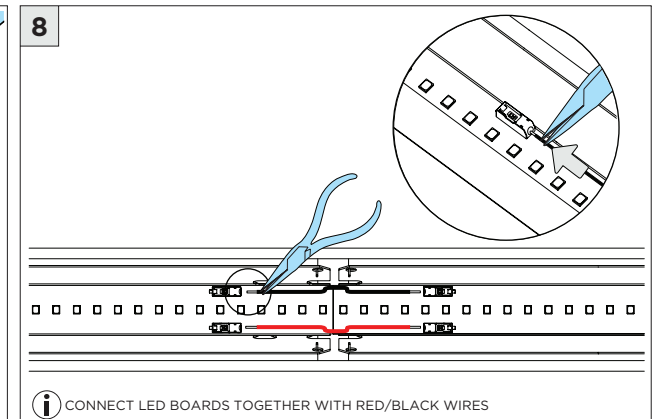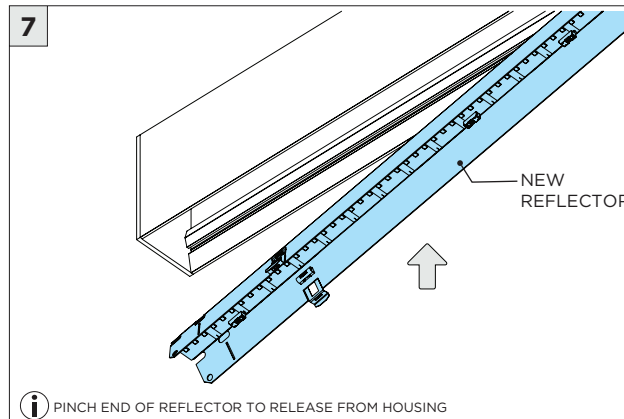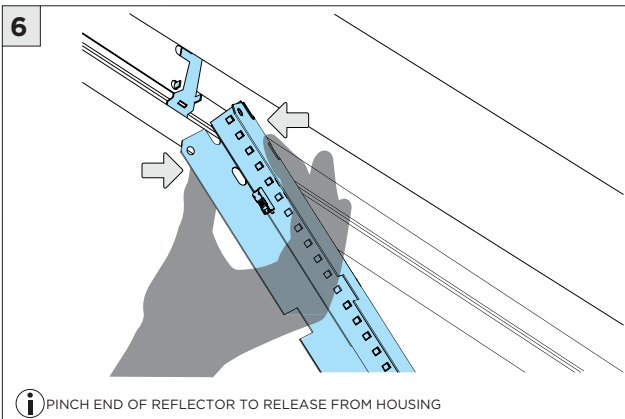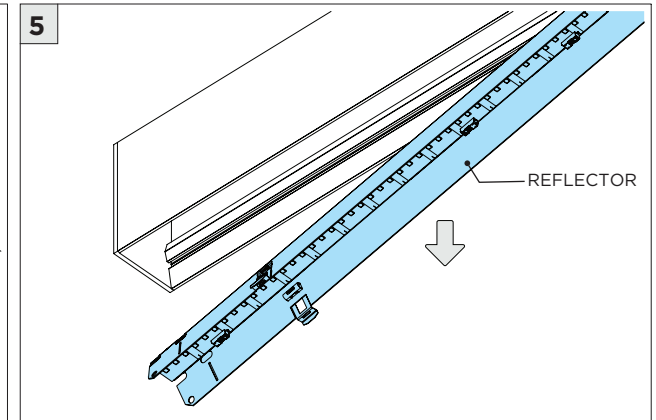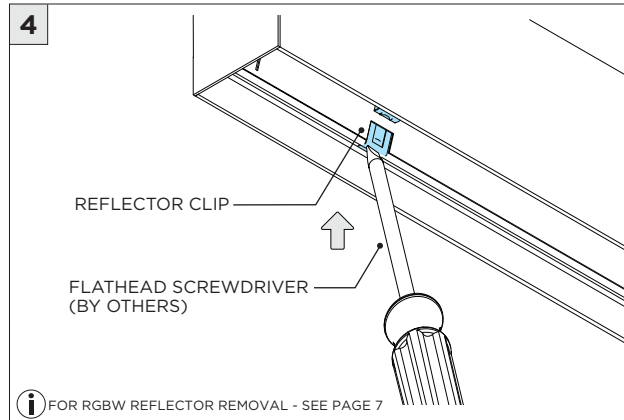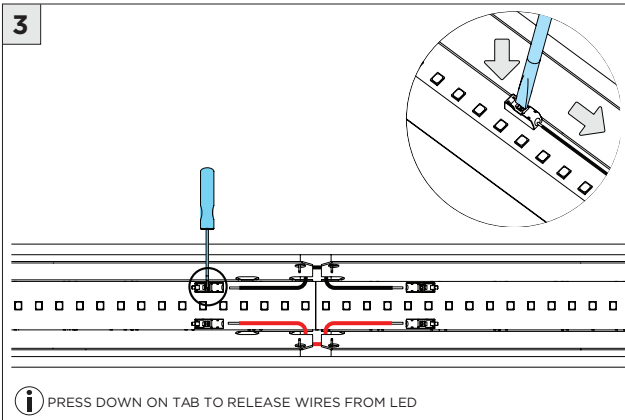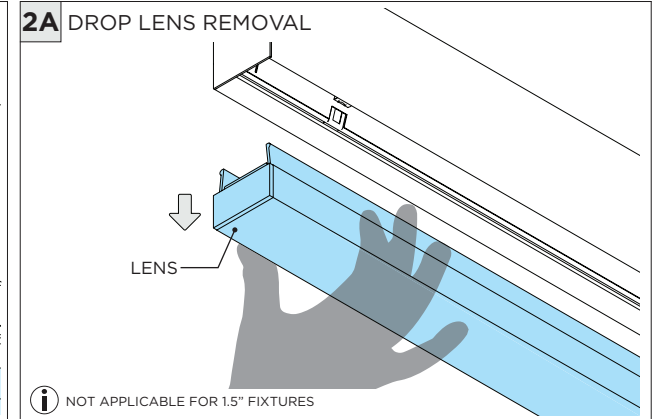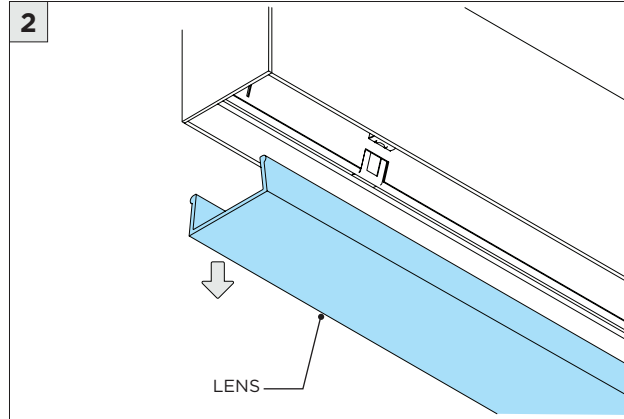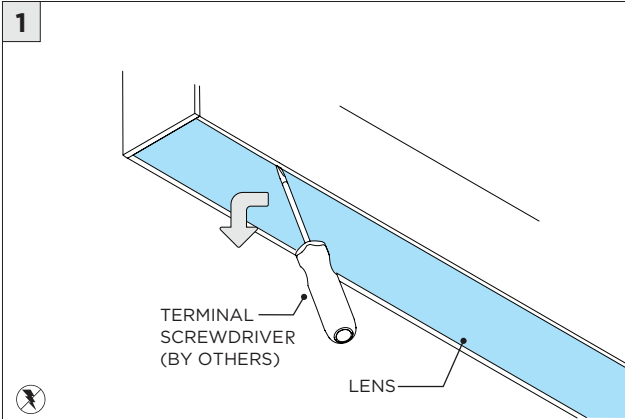

LED SERVICING

