




3GQ-1RLI

1.5" RECESSED LINEAR

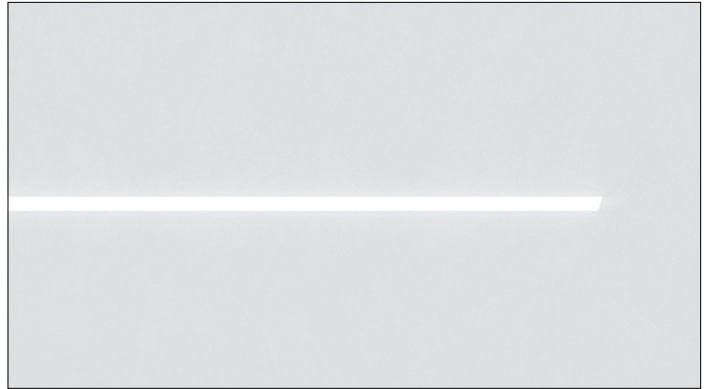

1.5" aperture with one piece extruded aluminum housing
 LED system with performance up to 111 lumens per watt
 Individual or continuous runs available (see quickship run chart)
 Lumen outputs ranging from 250lm/ft to 1000lm/ft
 Universal voltage, 0-10V integral drivers with 100-1% dimming range
 Suitable for drywall, grid, wood, and other architectural ceilings
 Extruded acrylic lens with optimal performance and glare control

10 DAY QUICKSHIP
 MAX ORDER SIZE: 400'

| | | | |
|------------------|--|--------------|-------------|
| PROJECT: | | TYPE: | |
| CATALOG#: | | DATE: | QTY: |


| CAT. NO | LUMEN OUTPUT | CRI | COLOR TEMP | VOLTAGE | DRIVER |
|-----------------|--|--|--|-----------------------|-----------------------------|
| 3GQ-1RLI | D250 - 250 LM/FT D500 - 500 LM/FT D750 - 750 LM/FT D1000 - 1000 LM/FT * <small>*1000lm not available with 90CRI option</small> | S80 - 80+ CRI H90 - 90+ CRI | 30K - 3000K 35K - 3500K 40K - 4000K | UNV - 120/277V | DIM - 0-10V (100-1%) |

| FLANGE TYPE | LENS OPTION | RUN TYPE |
|---|---|--|
| WT - WHITE TRIM XTR - TRIMLESS (MUD-IN DRYWALL) FX - FLANGELESS GCX - GRID CEILING * <small>(UNIVERSAL MOUNT)</small> <small>*Universal mounting brackets used for all grid ceiling types only. See mounting section for details</small> | FL - FLUSH DASY - ASYMMETRIC OPTIC | S - _____ (STRAIGHT RUN) * <small>Individual fixtures available in 4', 5', 6' and 8' Continuous runs starting at 10' and 12' Runs longer than 12' available in 4' increments (16', 20', 24' etc)</small> |

Refer to standard specification sheets for complete details. Please note that only options shown above qualify for 10 day 3GQ program


HARD CEILING

WT - TRIM

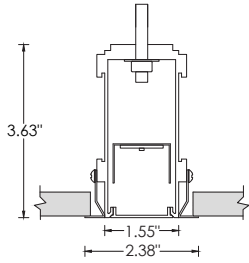


RECOMMENDED CEILING OPENING 2.20"

XTR - TRIMLESS

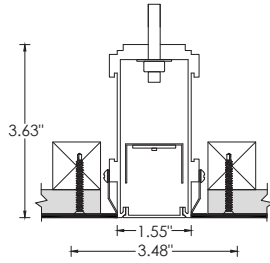

RECOMMENDED CEILING OPENING 2.25"


FX - FLANGELESS

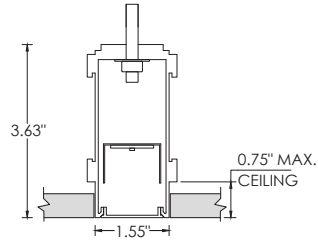


RECOMMENDED CEILING OPENING 1.60"

GRID CEILING


9L - 9/16" LAYIN




9TG - 9/16" TEGULAR




15L - 15/16" LAYIN

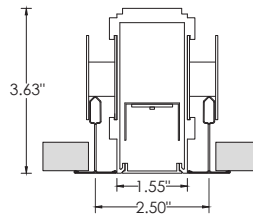


15TG - 15/16" TEGULAR

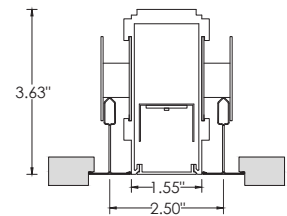


9TP - 9/16" TEGULAR



15TP - 15/16" TEGULAR

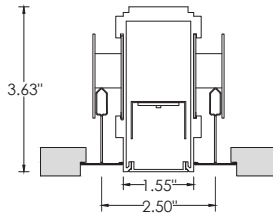

9ST - 9/16" SLOT TEE TEGULAR



Grid ceiling fixtures ship with universal mounting brackets suitable for all ceiling types listed below. Refer to installation instruction

QUICKSHIP RUN CHART

| RUN LENGTH | SECTION LENGTHS | RUN LENGTH | SECTION LENGTHS | RUN LENGTH | SECTION LENGTHS |
|------------|-----------------|------------|-----------------|------------|-------------------|
| 4' | 4' | 12' | 8'+4' | 32' | 8'+8'+8'+8' |
| 5' | 5' | 16' | 8'+8' | 36' | 8'+8'+8'+8'+4' |
| 6' | 6' | 20' | 8'+8'+4' | 40' | 8'+8'+8'+8'+8' |
| 8' | 8' | 24' | 8'+8'+8' | 44' | 8'+8'+8'+8'+8'+4' |
| 10' | 5'+5' | 28' | 8'+8'+8'+4' | 48' | 8'+8'+8'+8'+8'+8' |