



## 3.3" WALL WASH CYLINDER - PENDANT


CABLE PENDANT MOUNT




**i** THE IMAGES SHOWN ARE FOR ILLUSTRATION ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

### COMPONENTS


#### STANDARD CANOPY

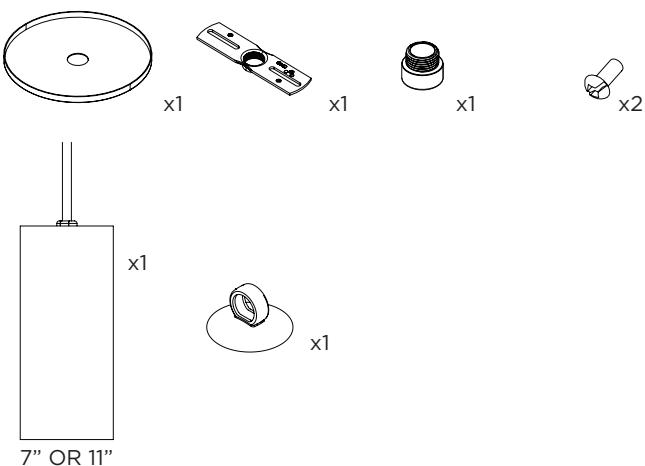


#### CONDUIT FEED CANOPY

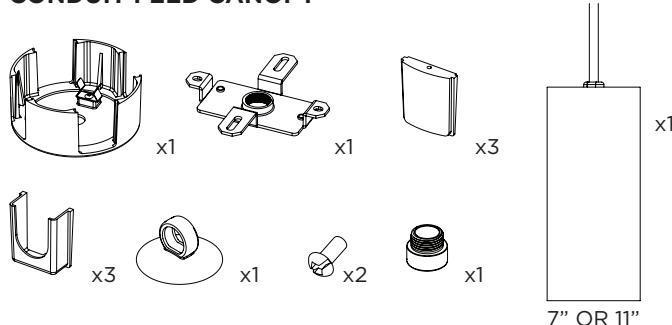

#### POWER CANOPY

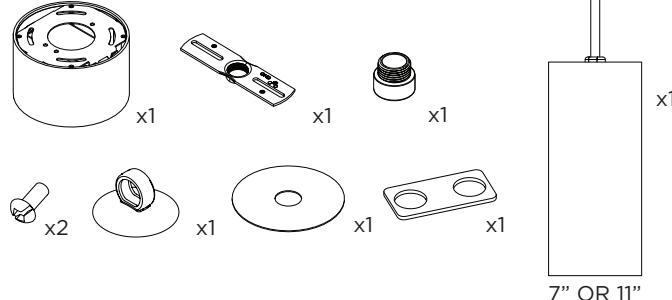



#### 4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

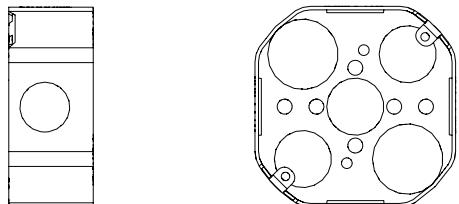



JUNCTION BOX (BY OTHERS)


INSTRUCTION KEY	INFORMATION
	ADDITIONAL
	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING

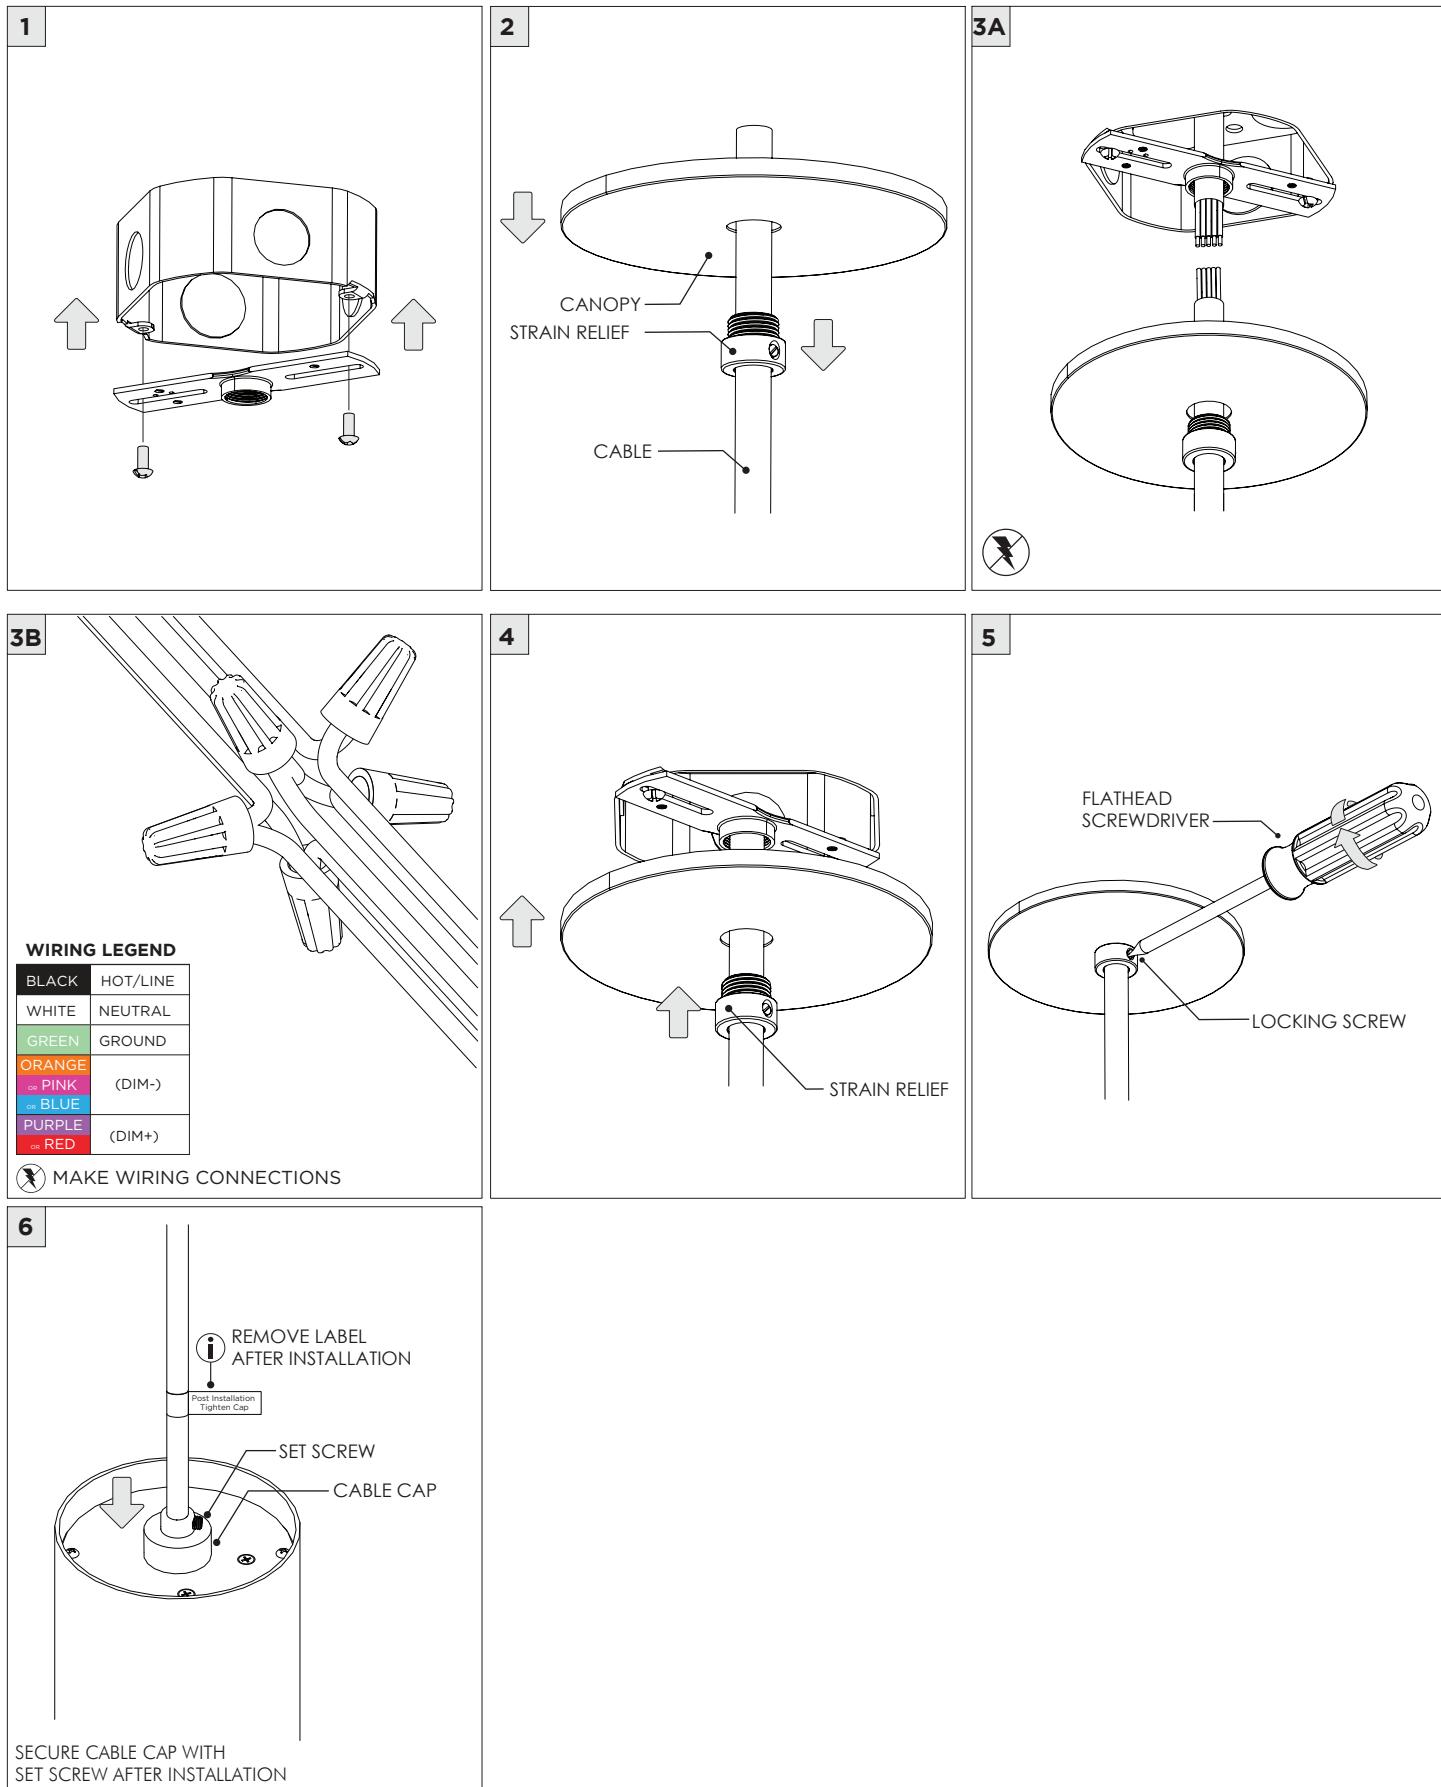

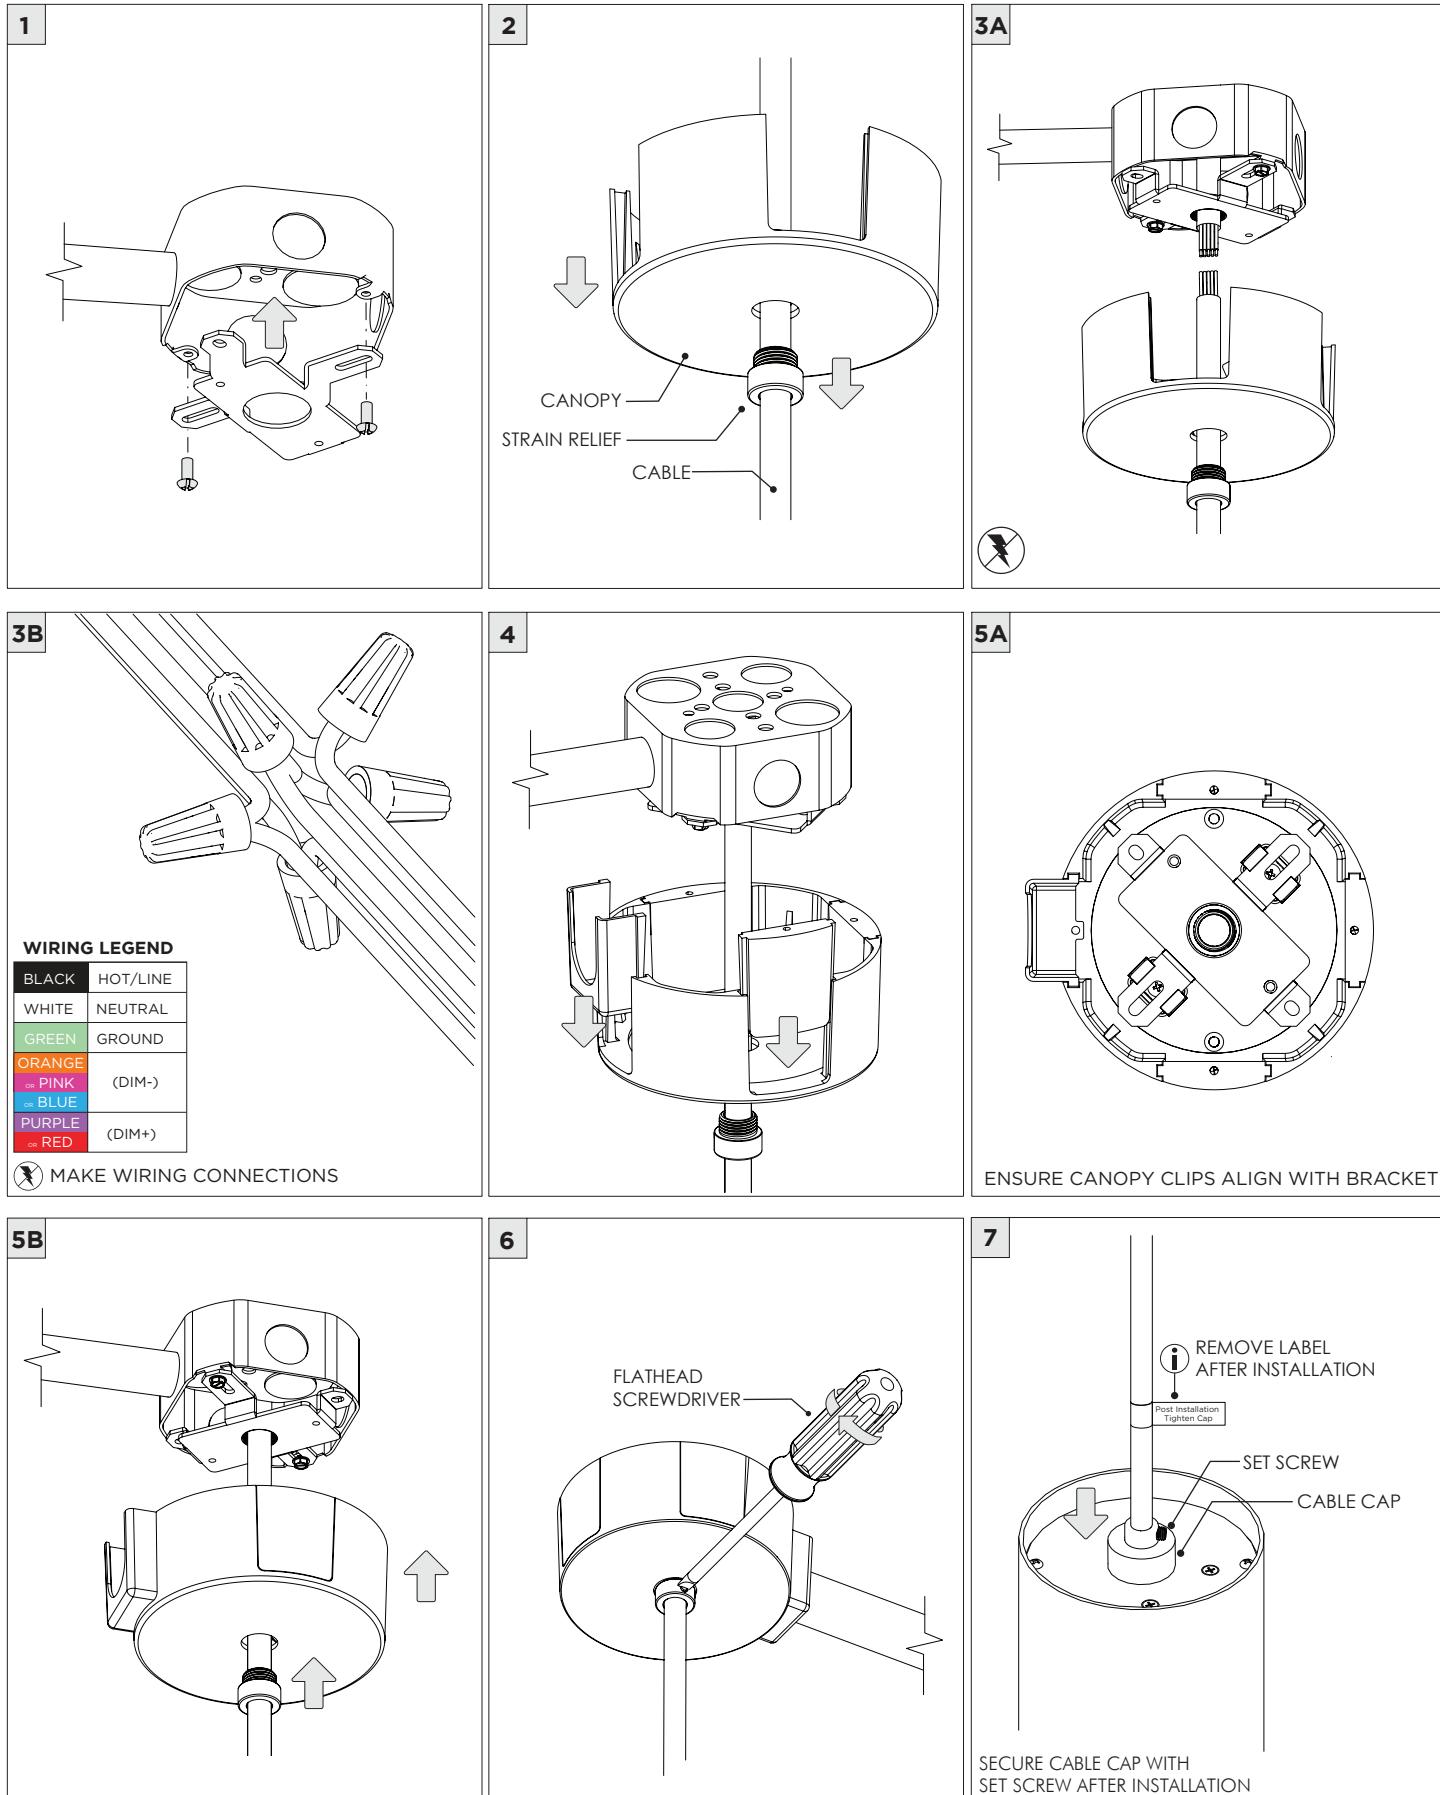

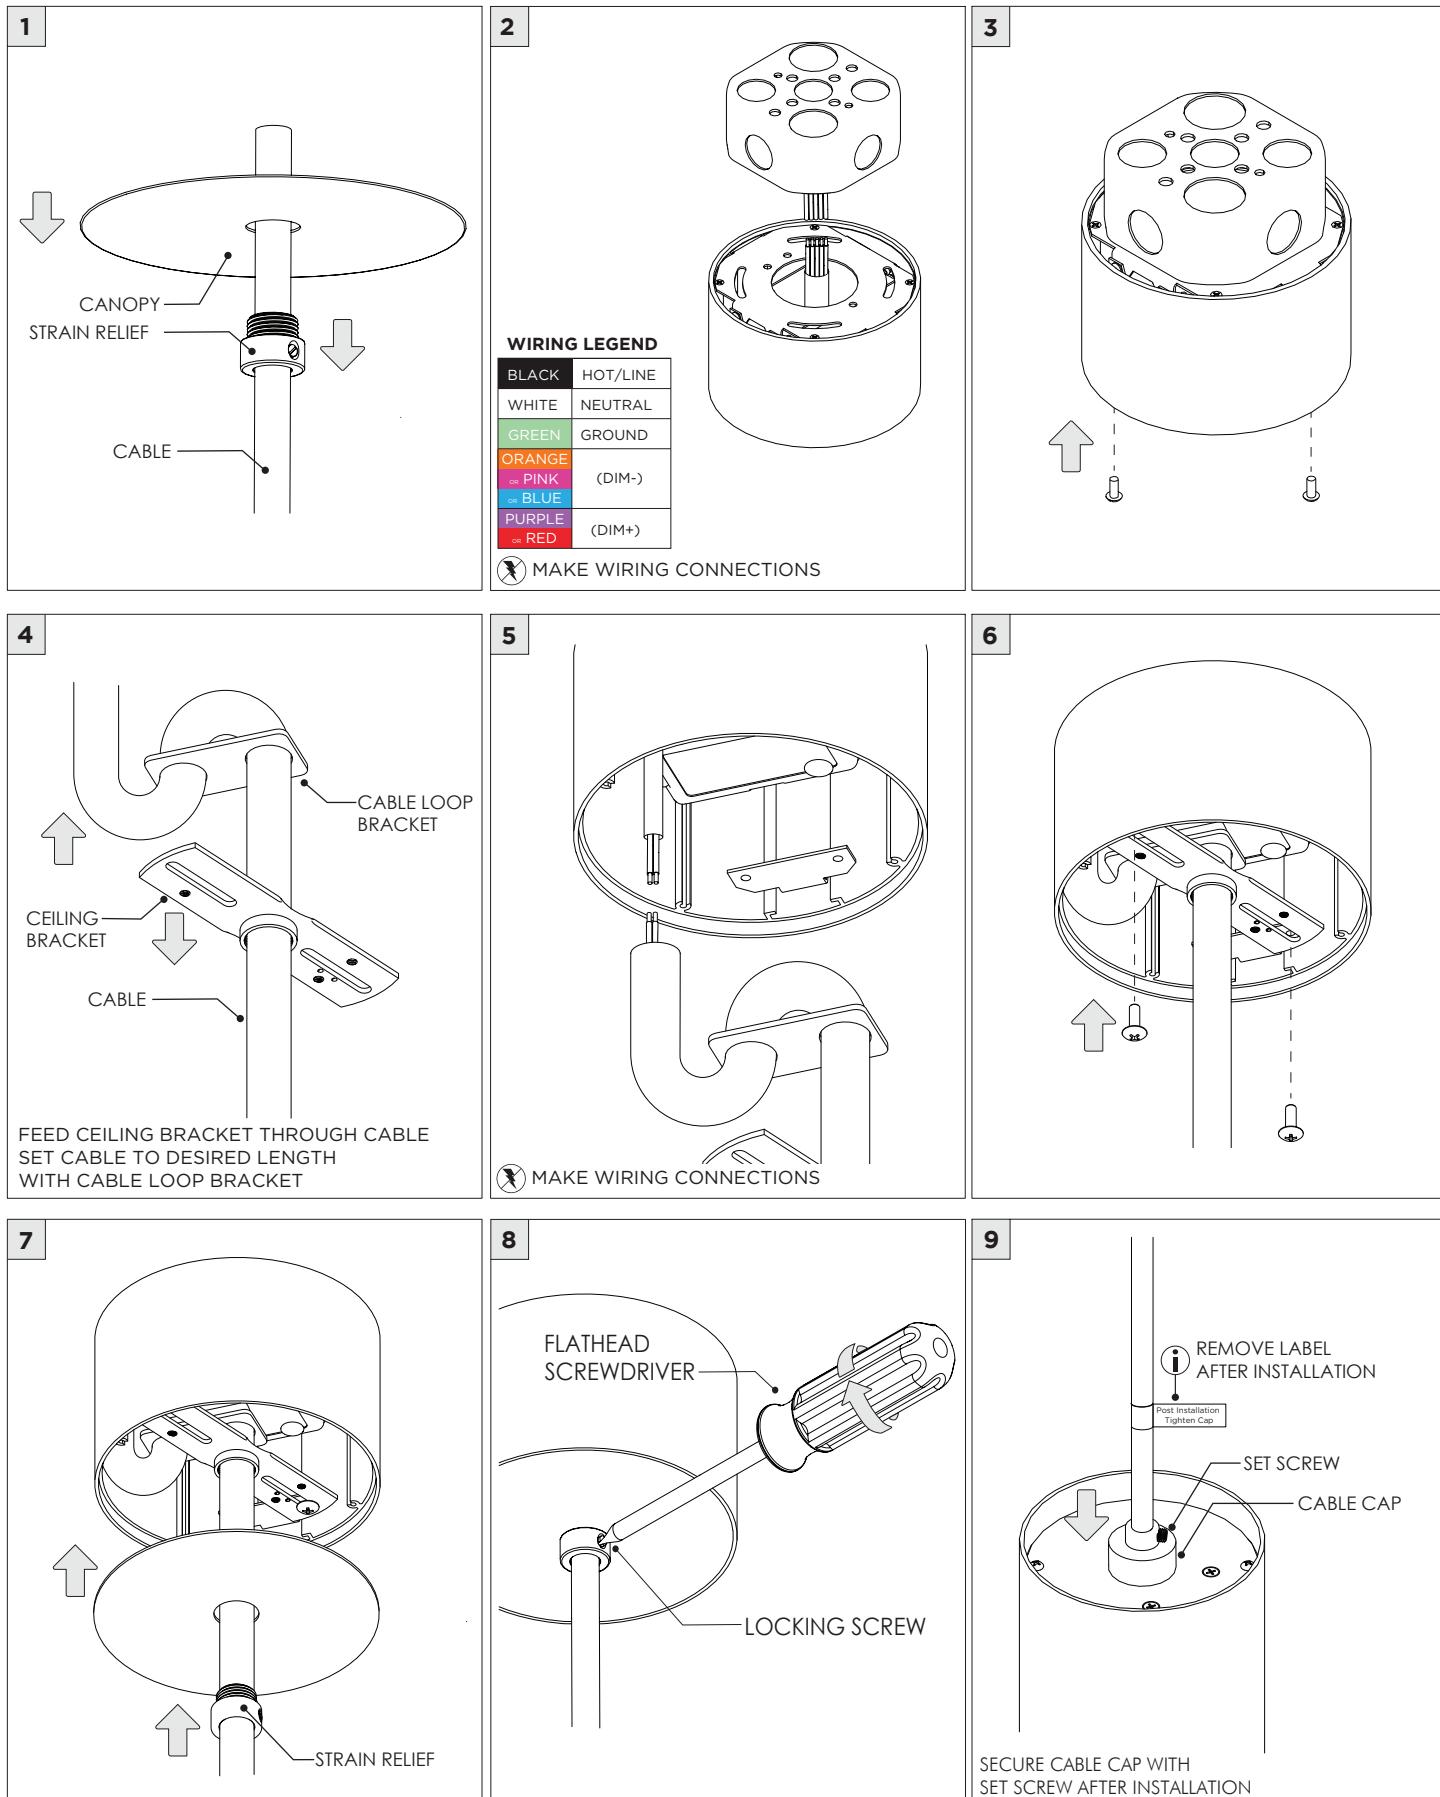


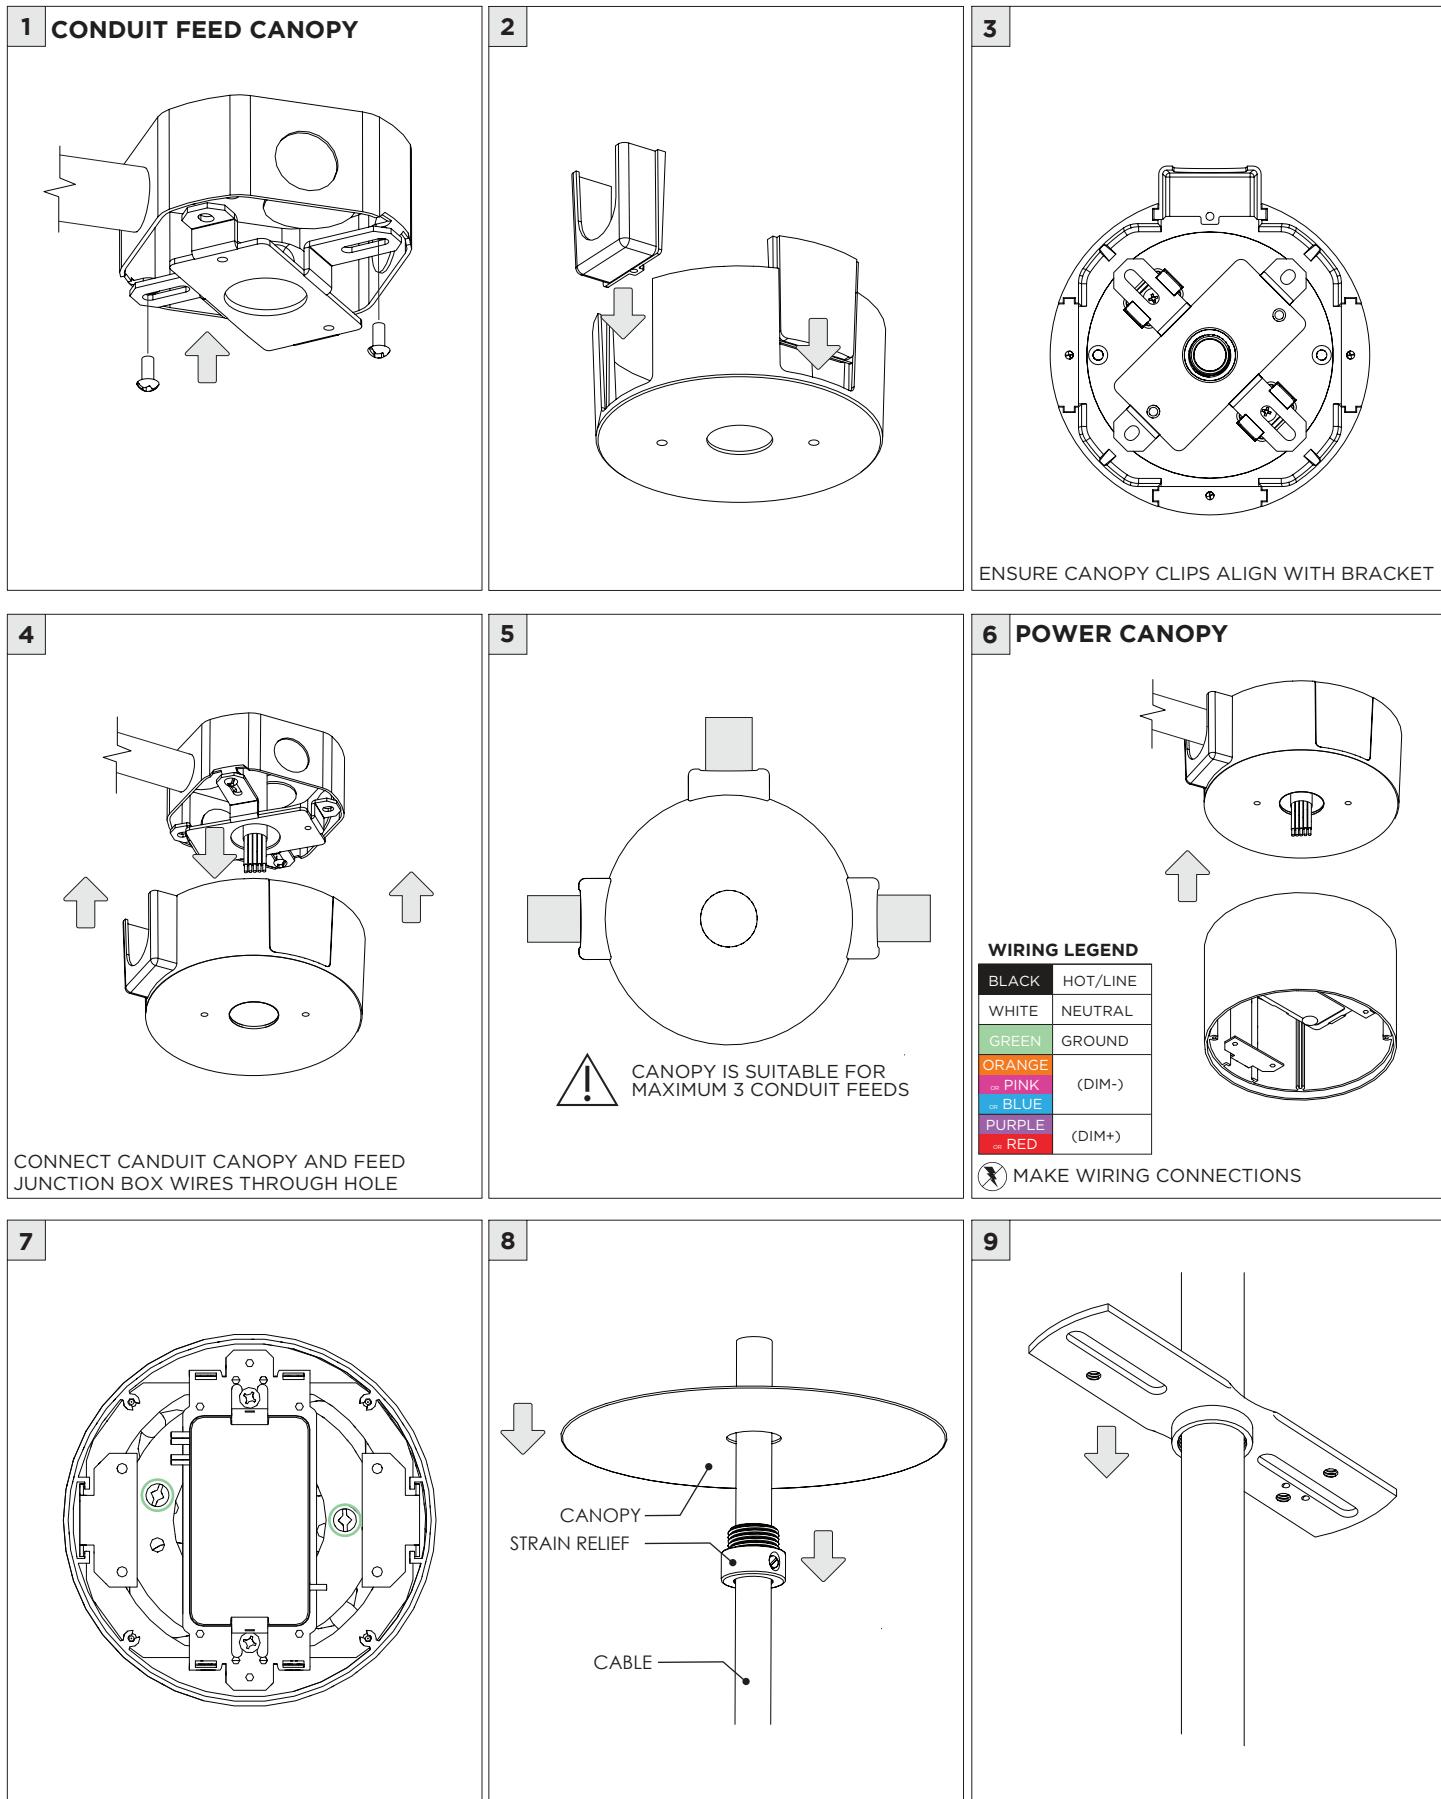

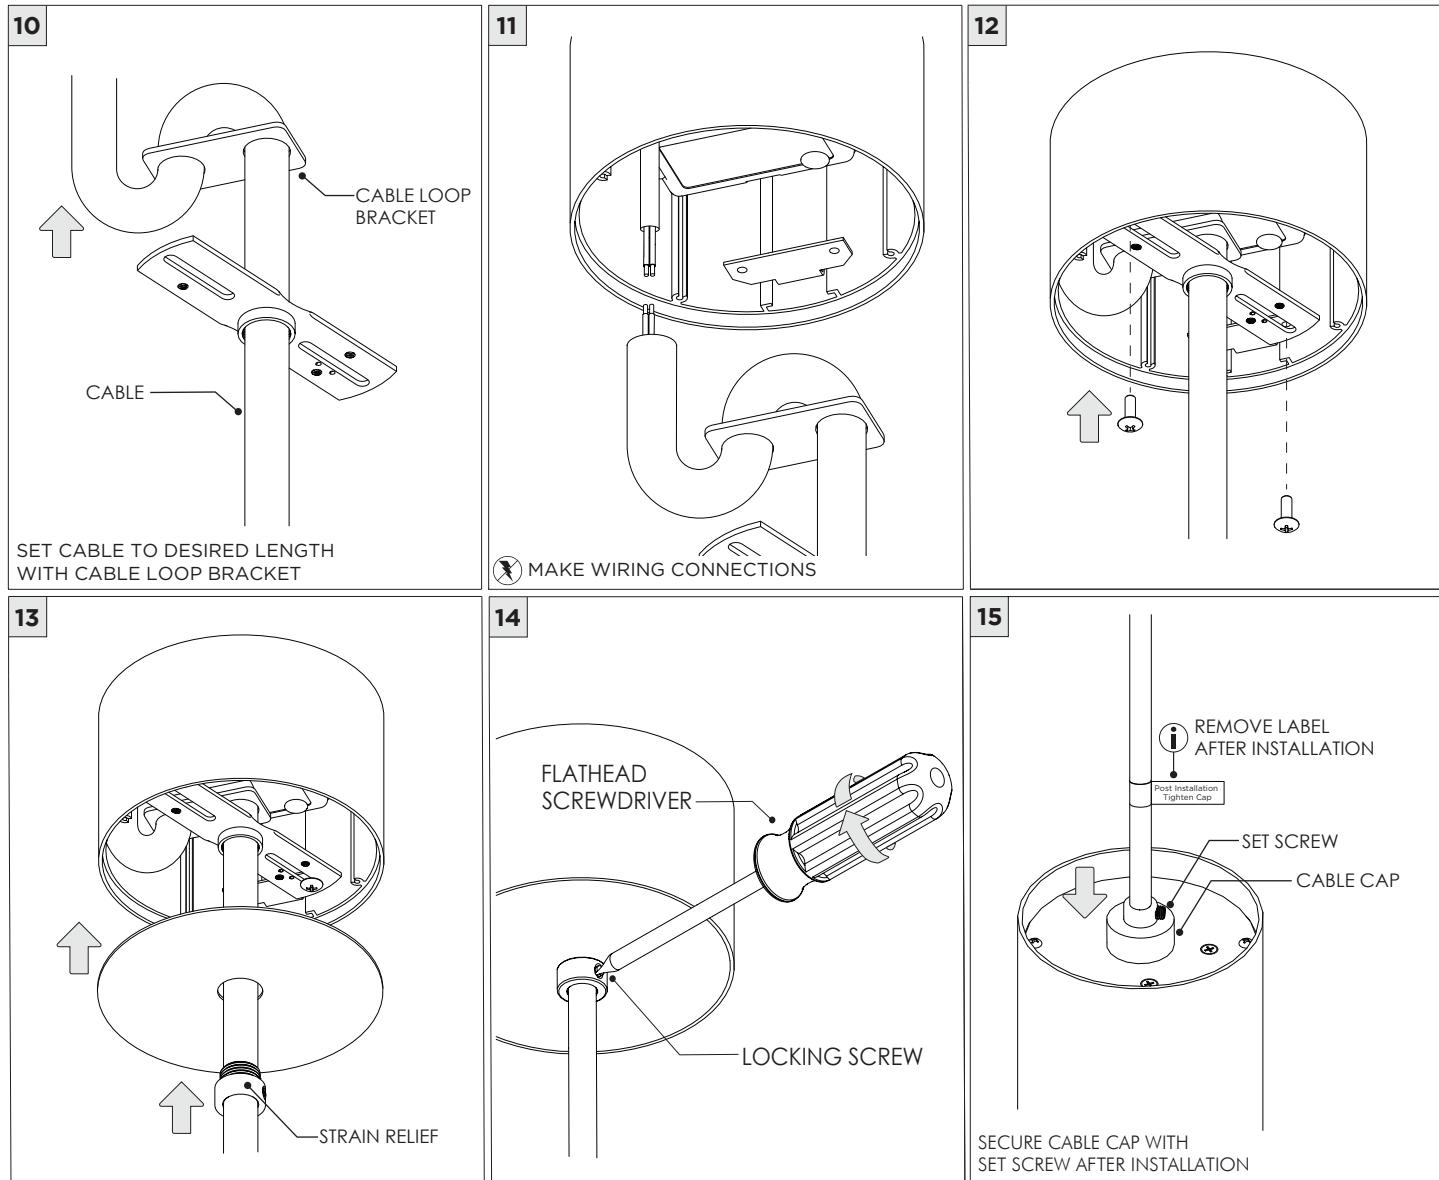


**DRIVER SERVICING**

**1A**

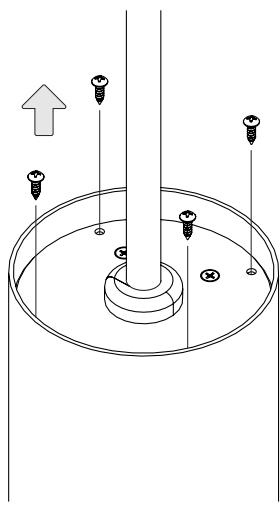


**2**

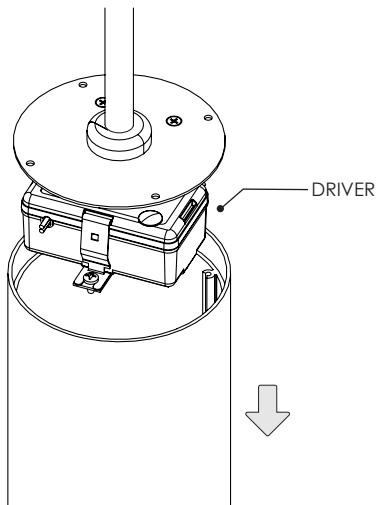


**LED SERVICING**

**1**

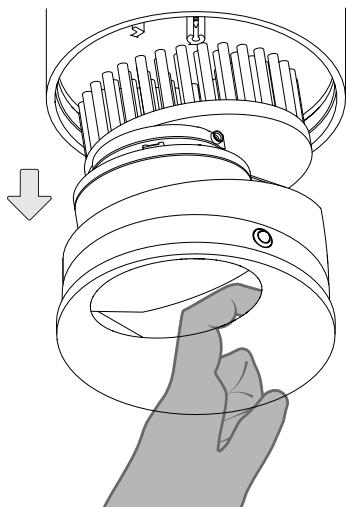


DISCONNECT LED WIRES AND REMOVE LED INSERT

**2**

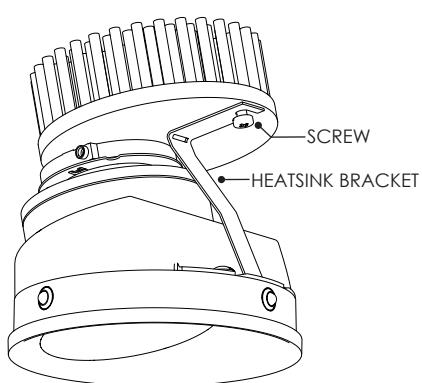

LOOSEN HEATSINK BRACKET SCREW

**3**

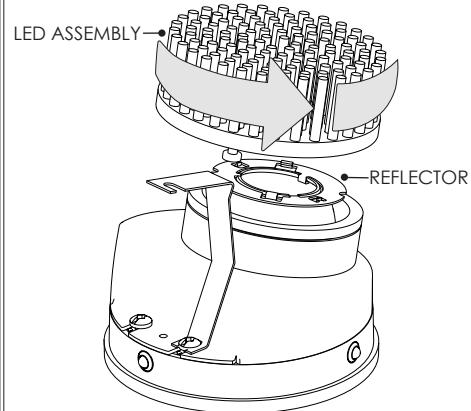

TWIST AND REMOVE LED ASSEMBLY  
FROM REFLECTOR

**DRIVER SERVICING**