

## 3.3" ZOIE CYLINDER


SURFACE MOUNT




THE IMAGES SHOWN ARE FOR ILLUSTRATION ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

### COMPONENTS



#### STANDARD CANOPY

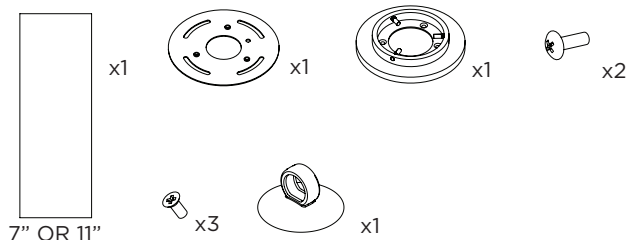


#### CONDUIT FEED CANOPY

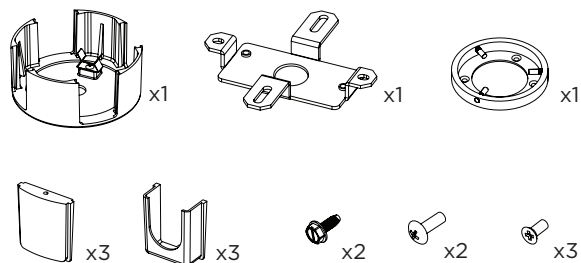

#### SEAMLESS CANOPY (FOR NEW CONSTRUCTION ONLY)

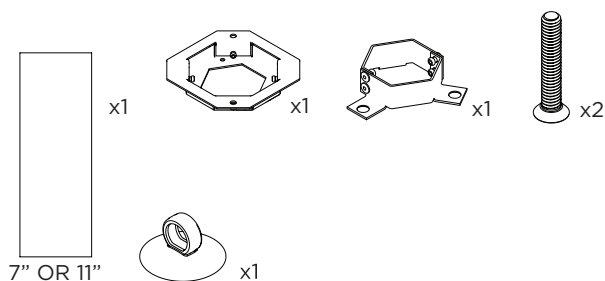

#### 4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

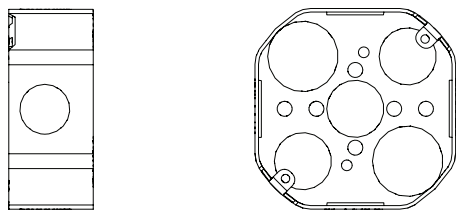







JUNCTION BOX (BY OTHERS)








#### INSTRUCTION KEY










#### INFORMATION

- ⚠️ ADDITIONAL
- ⓘ ATTENTION
- ⚡ POWER ON
- ⏻ POWER OFF



INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN  
REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION  
FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY  
DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS  
TURN OFF POWER DURING INSTALLATION OR SERVICING

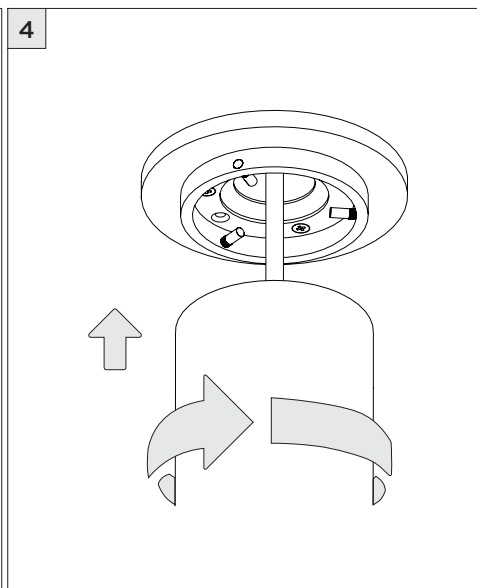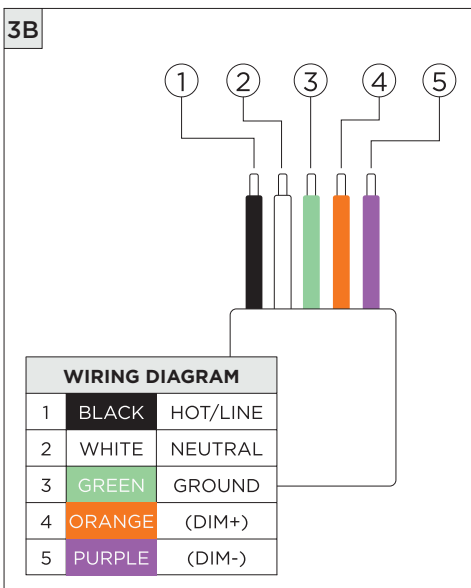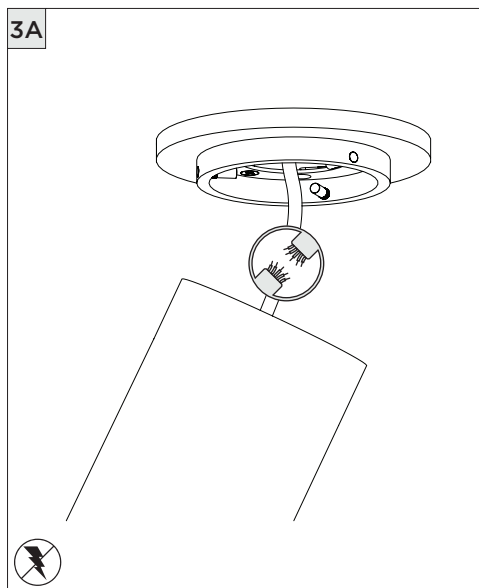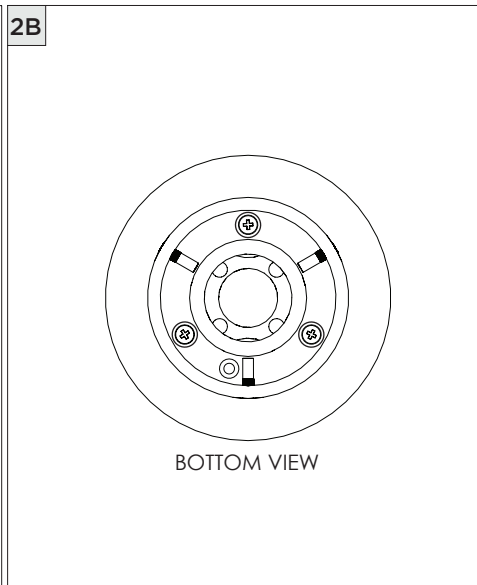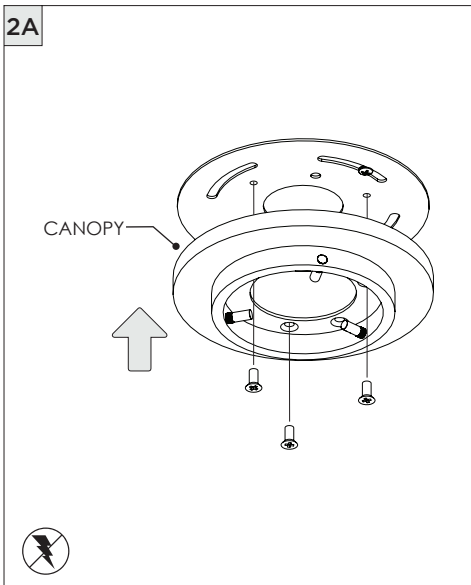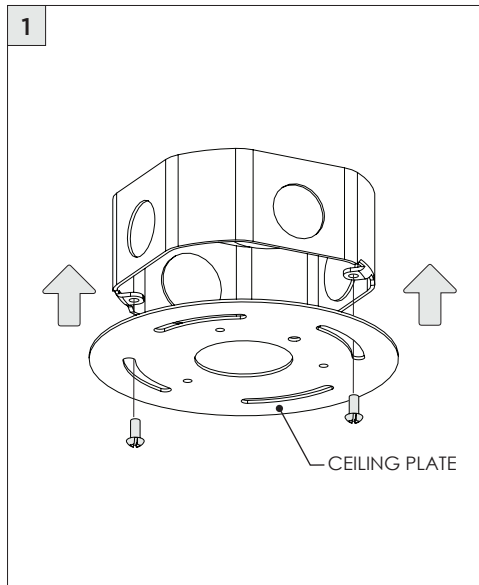

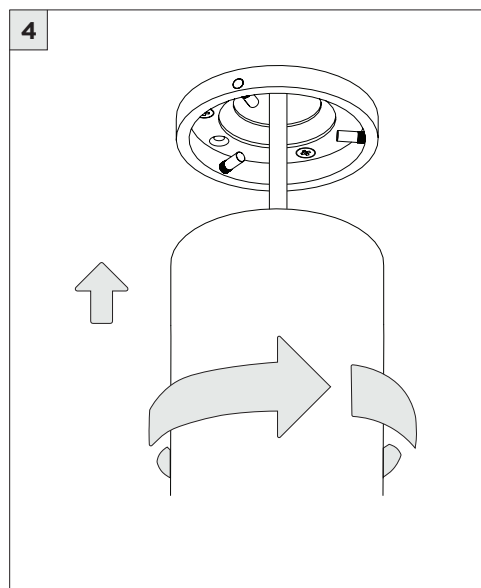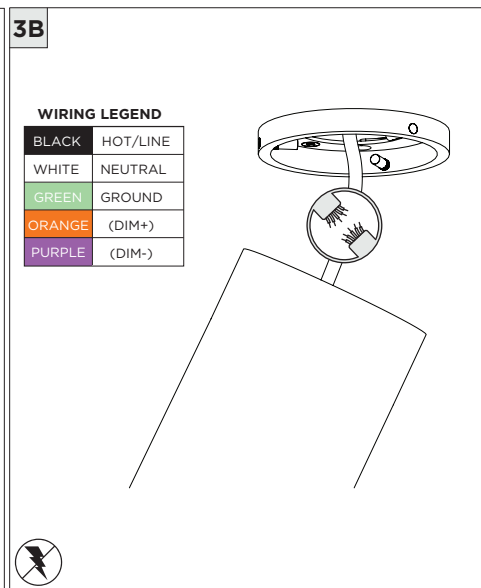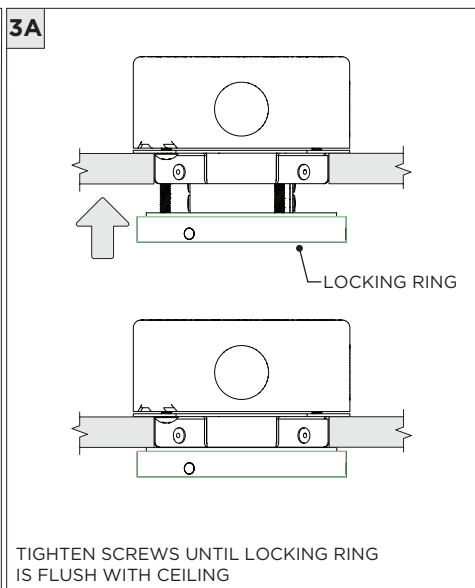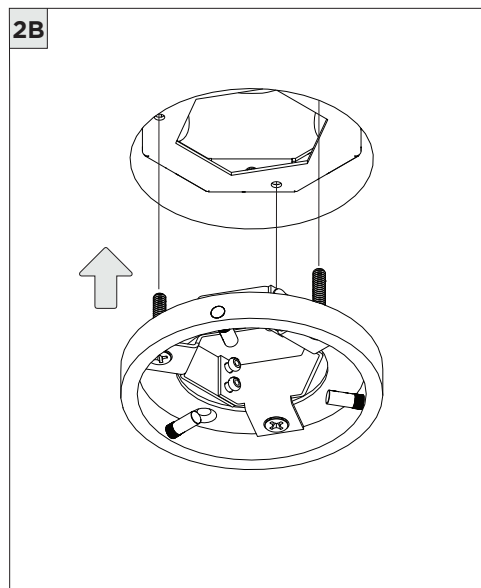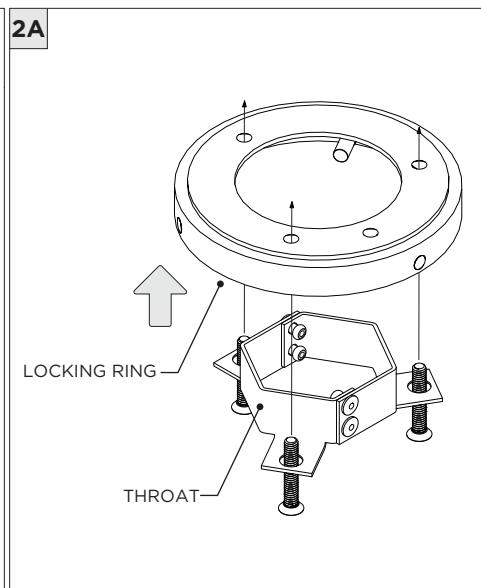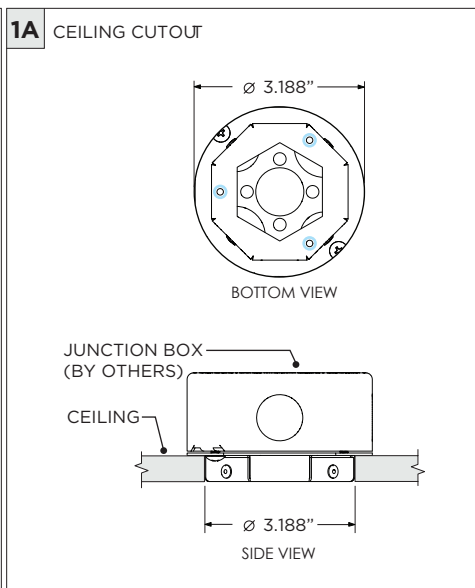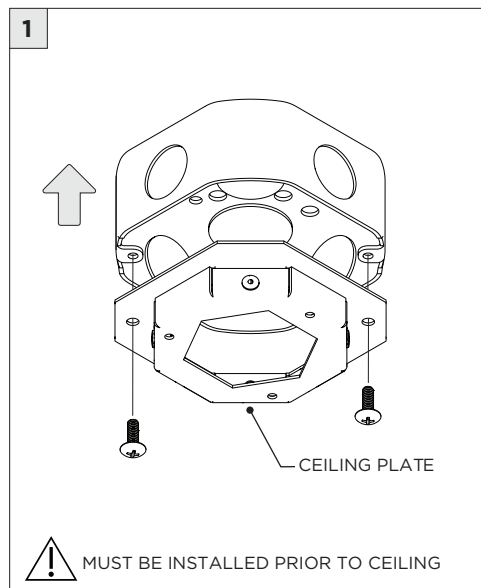

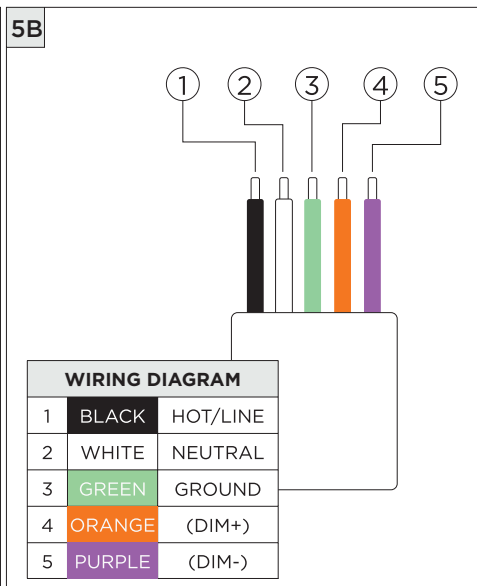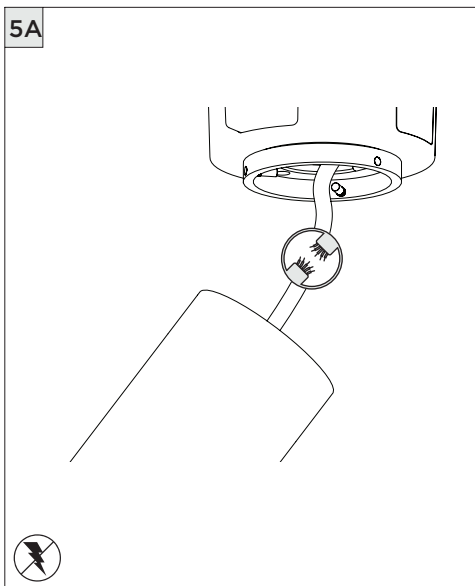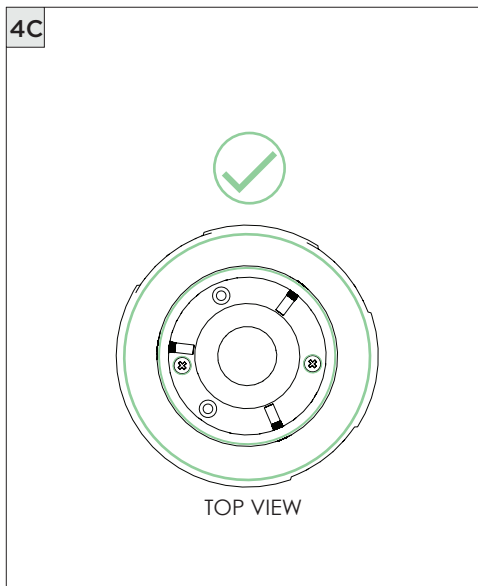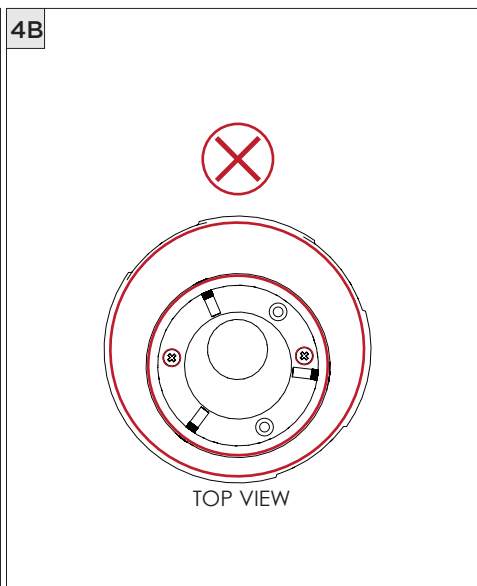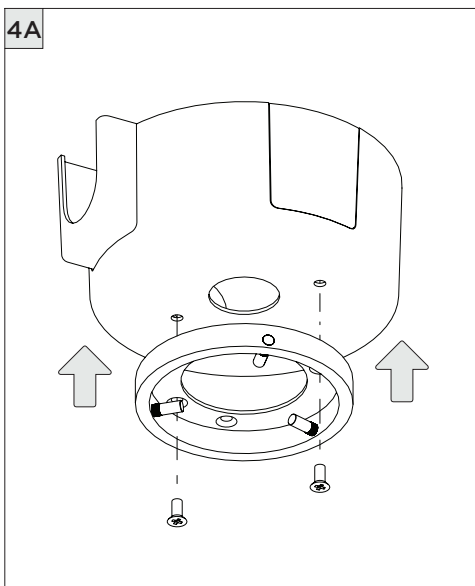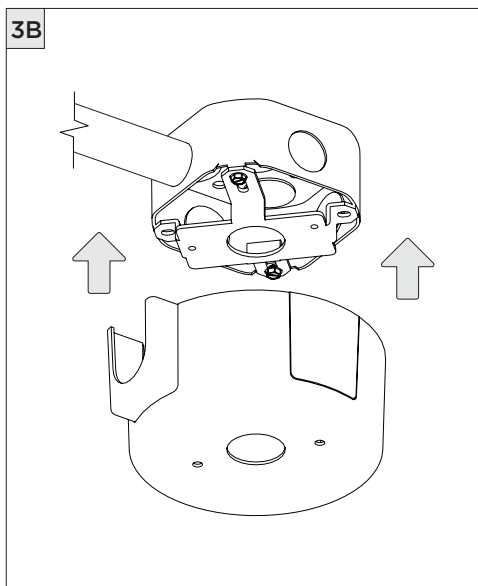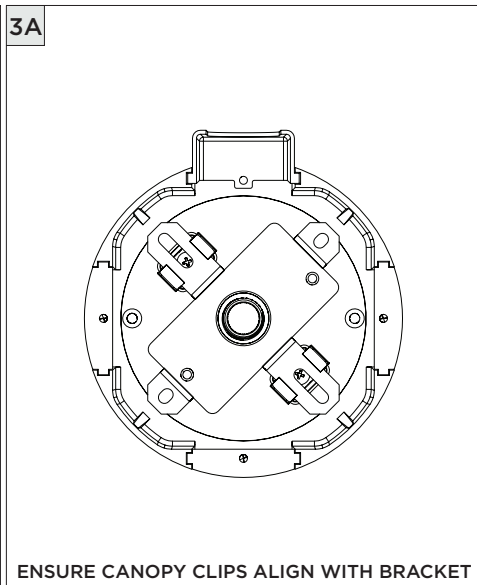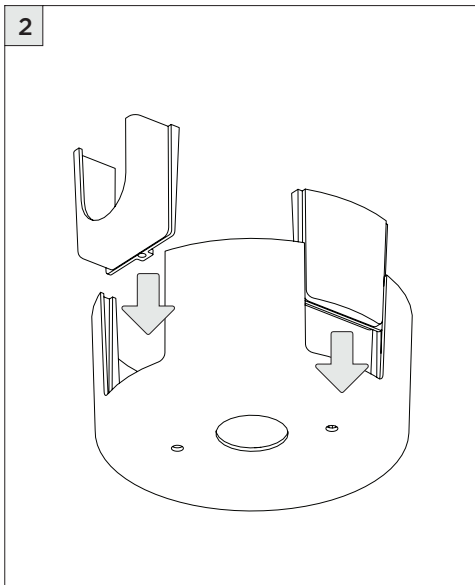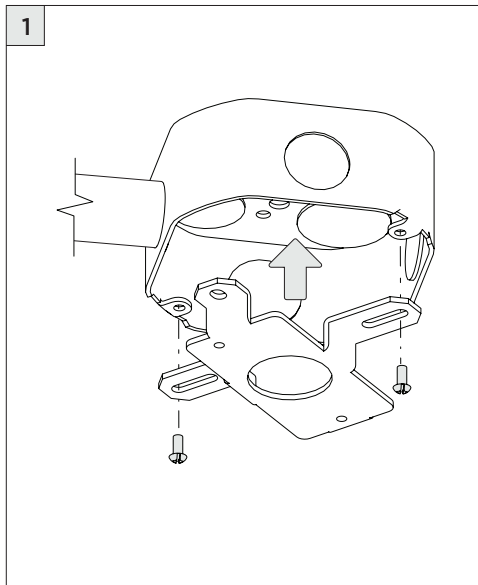


6

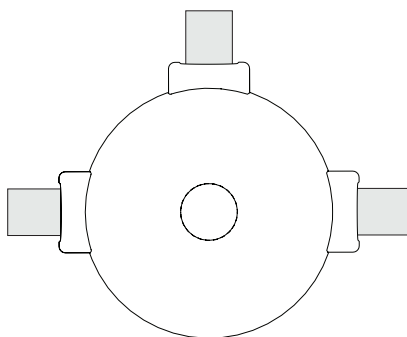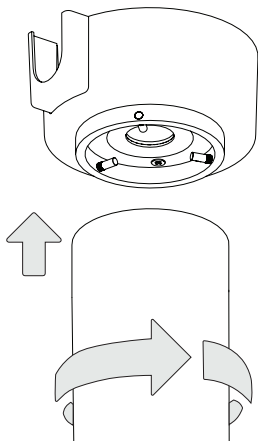

CANOPY IS SUITABLE FOR  
MAXIMUM 3 CONDUIT FEEDS

## DRIVER SERVICING

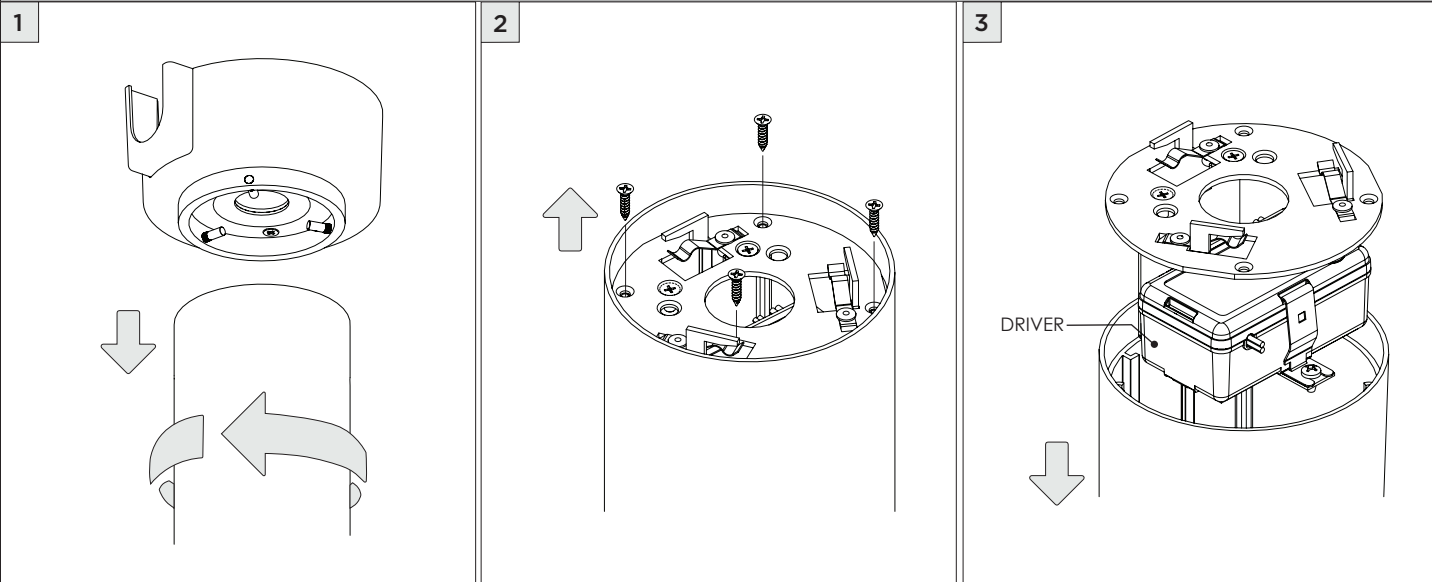

## LED SERVICING

