



## 4.5" WALLWASH CYLINDER - PENDANT


CABLE PENDANT MOUNT




**i** THE IMAGES SHOWN ARE FOR ILLUSTRATION ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

### COMPONENTS


#### STANDARD CANOPY

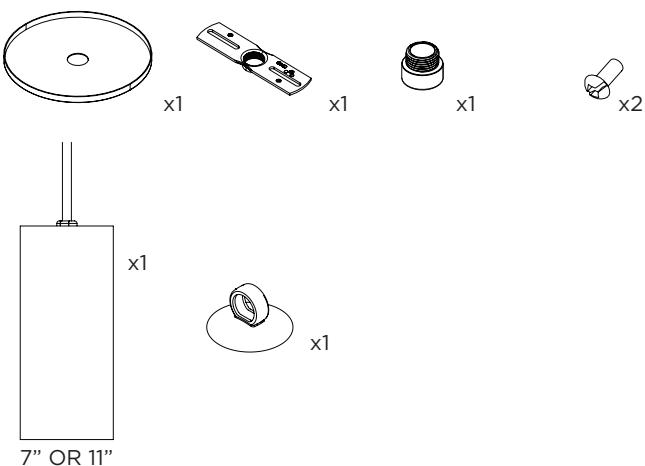


#### CONDUIT FEED CANOPY

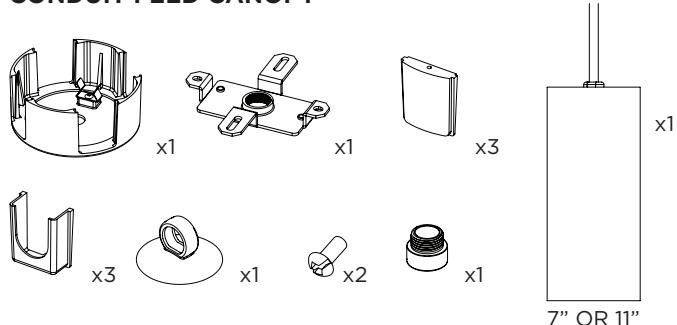

#### POWER CANOPY

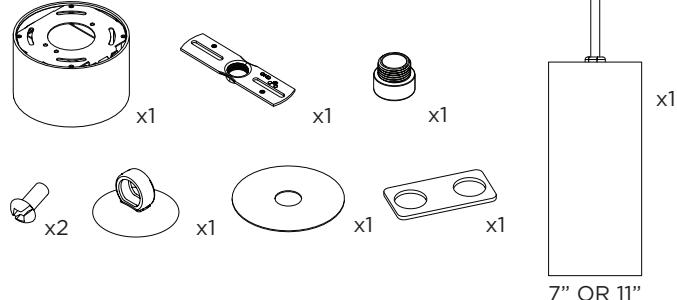



#### 4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

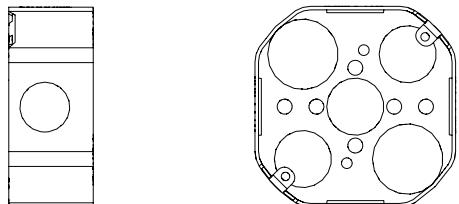



JUNCTION BOX (BY OTHERS)


INSTRUCTION KEY	INFORMATION
	ADDITIONAL
	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING

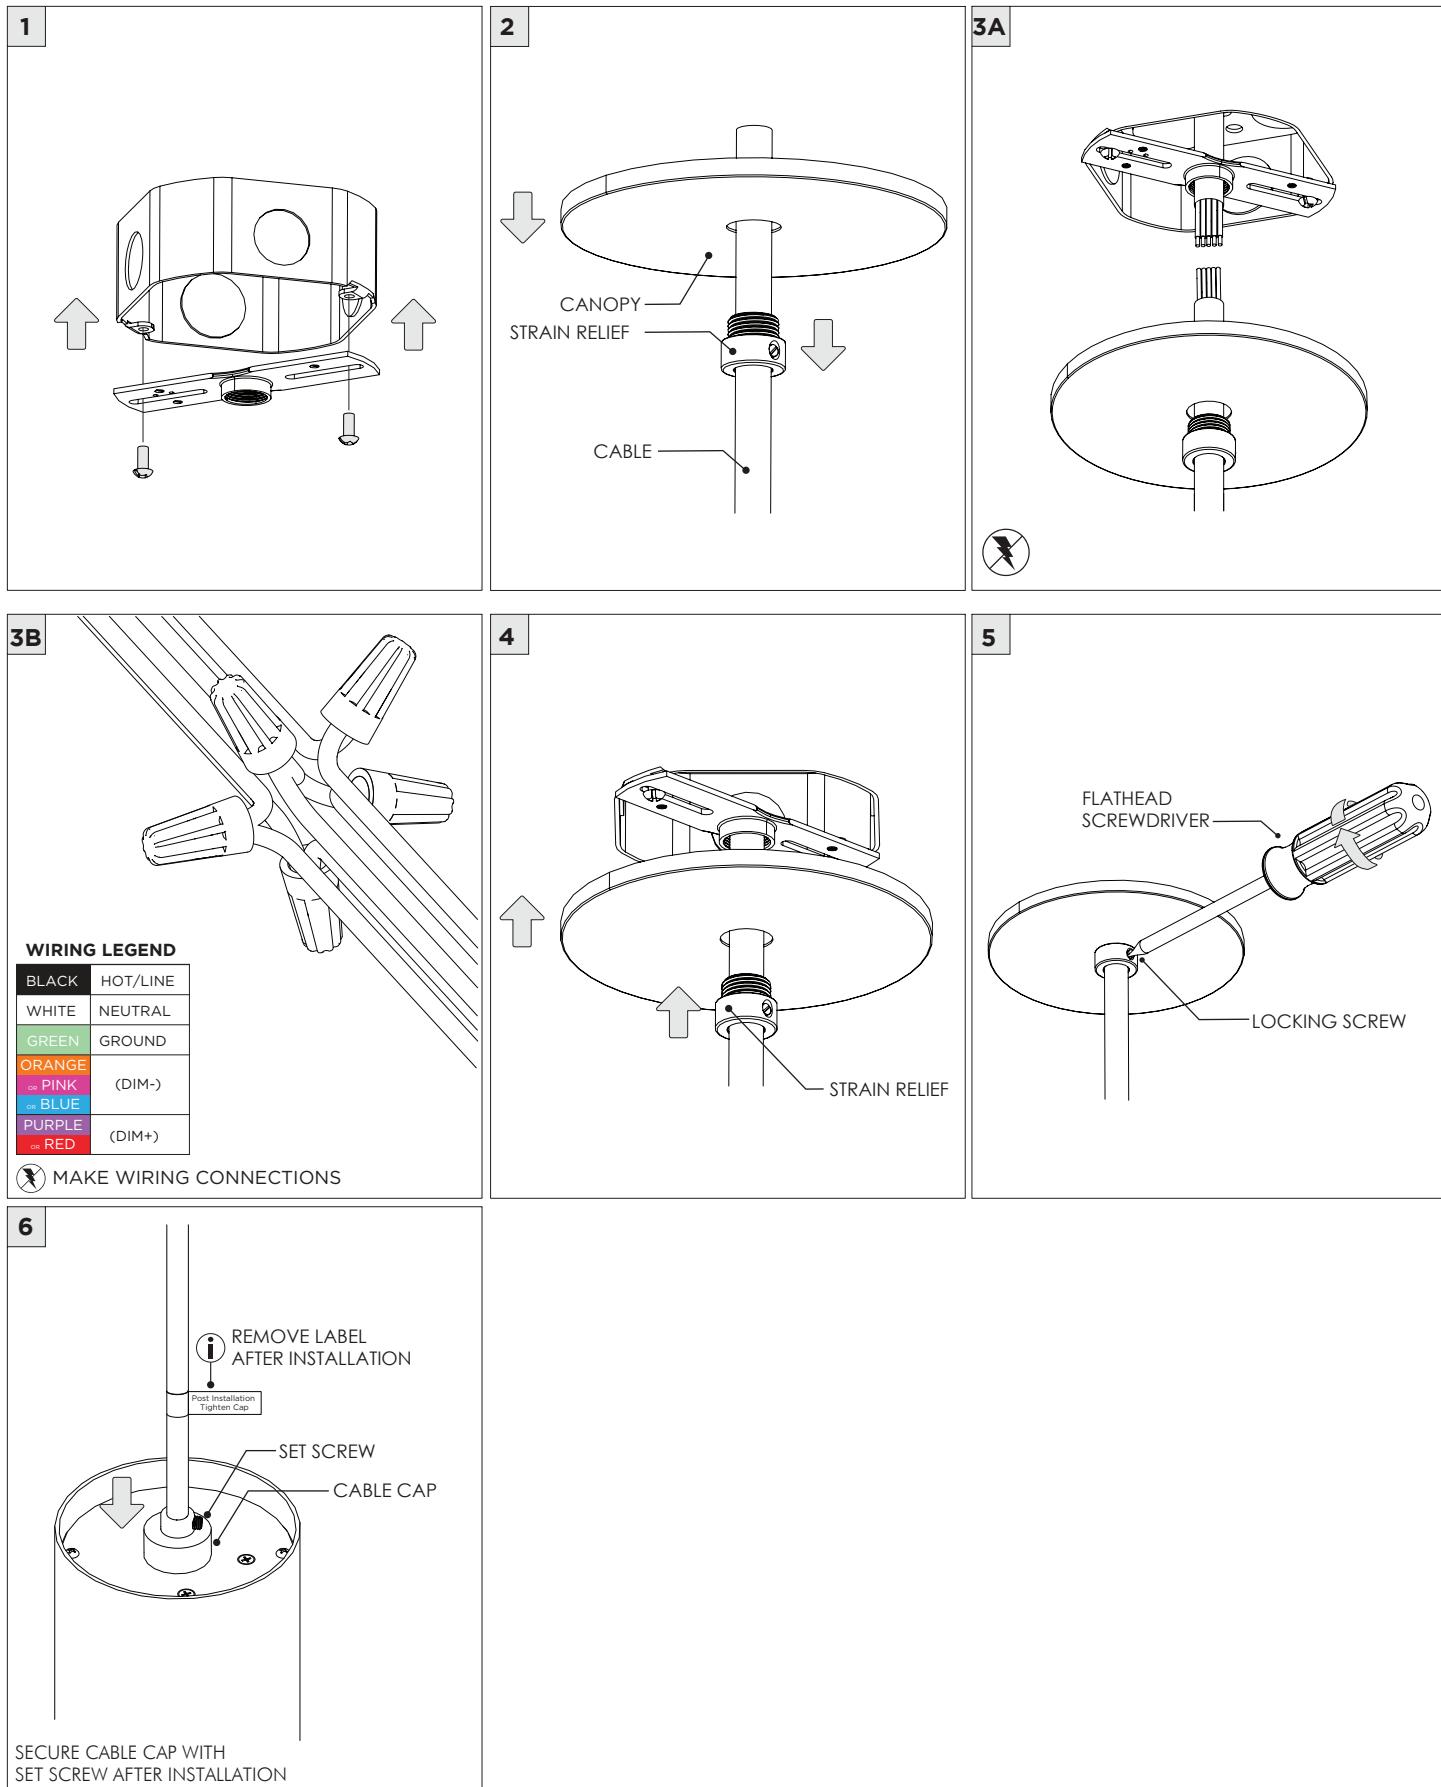


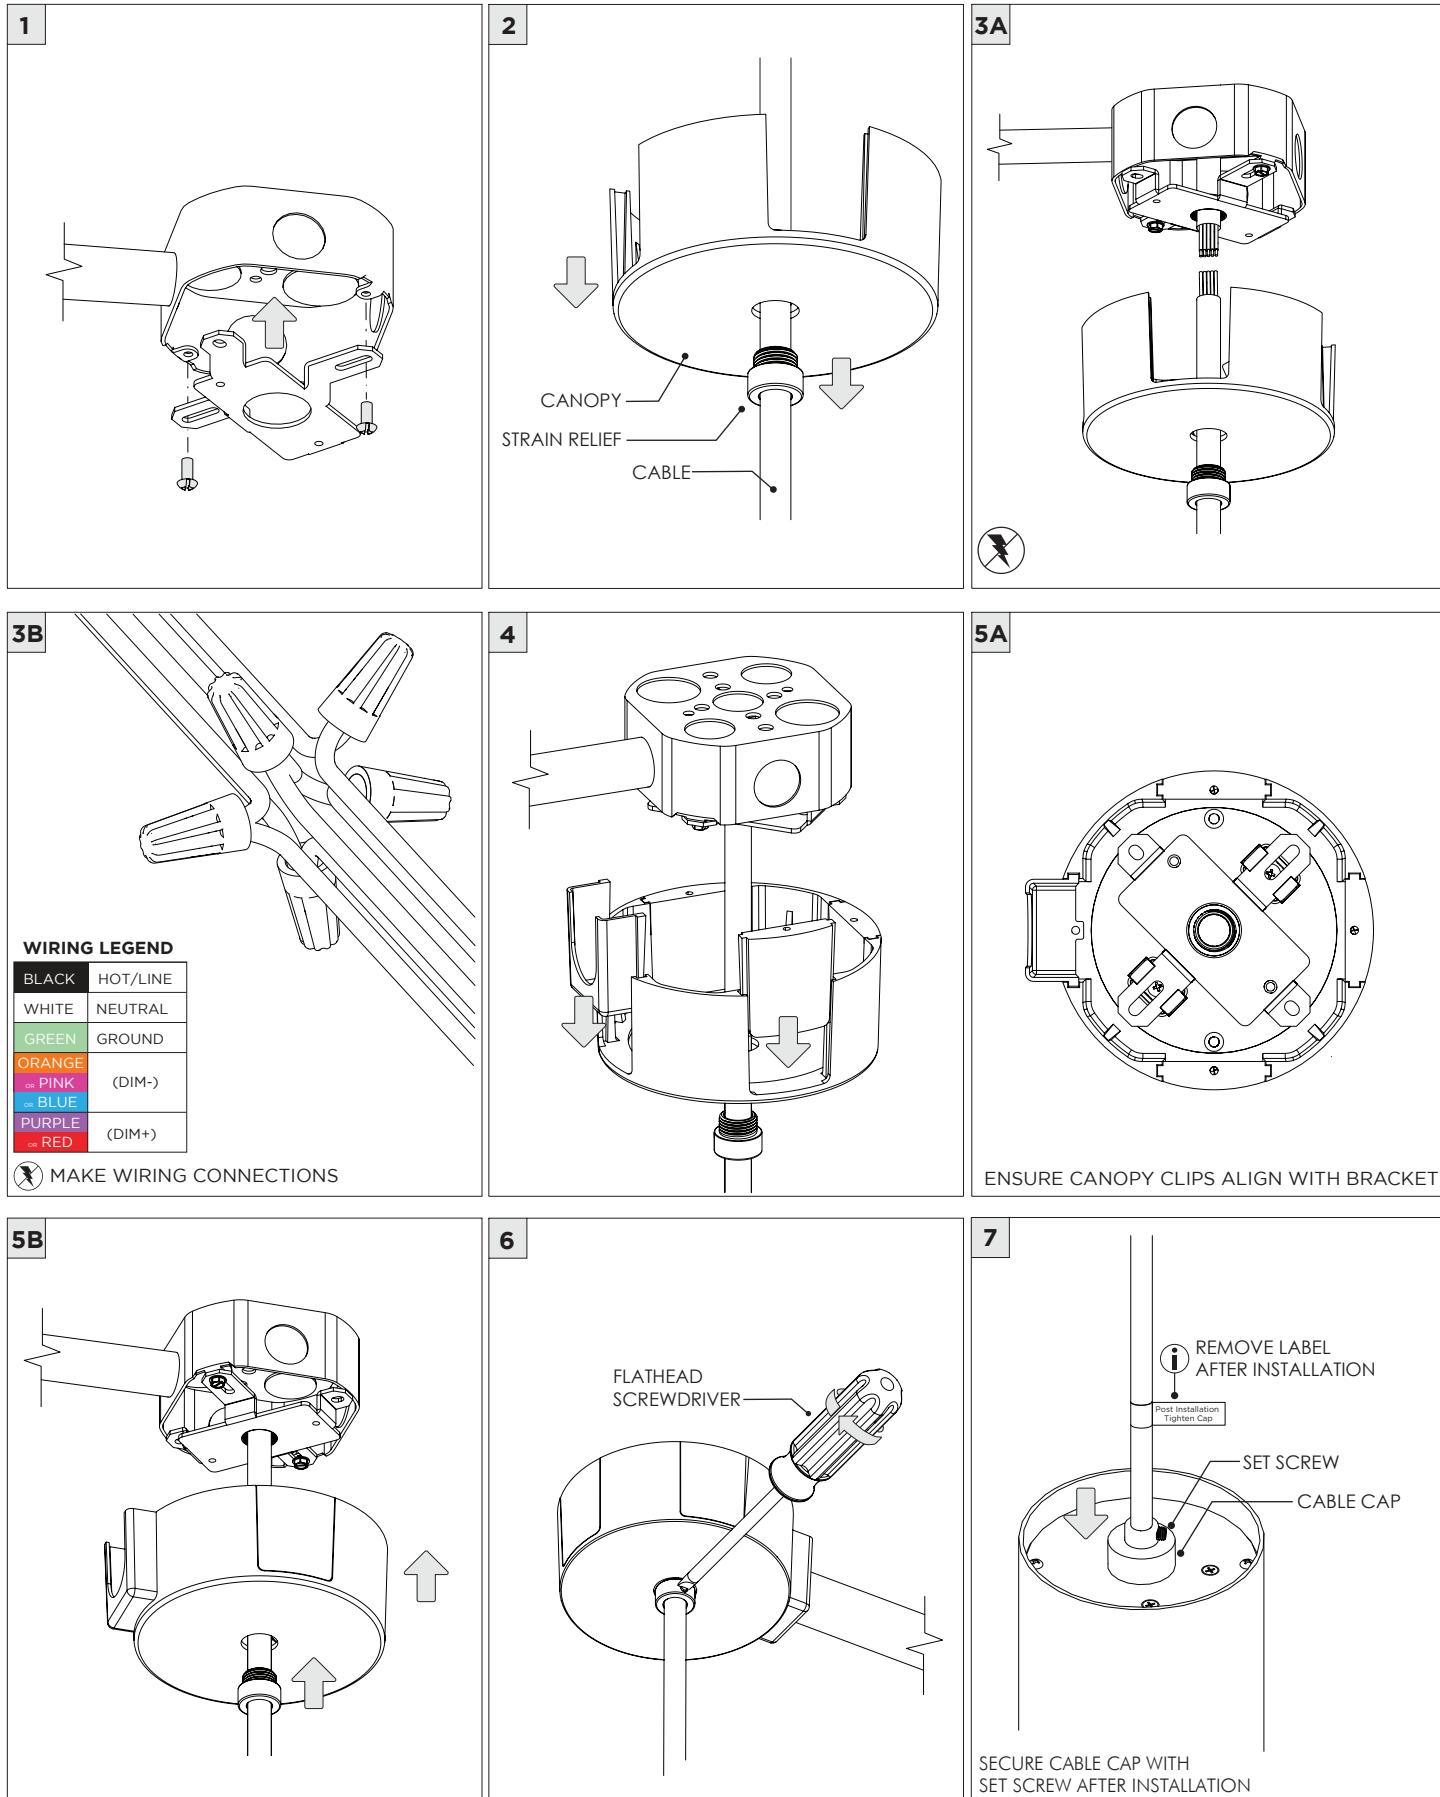


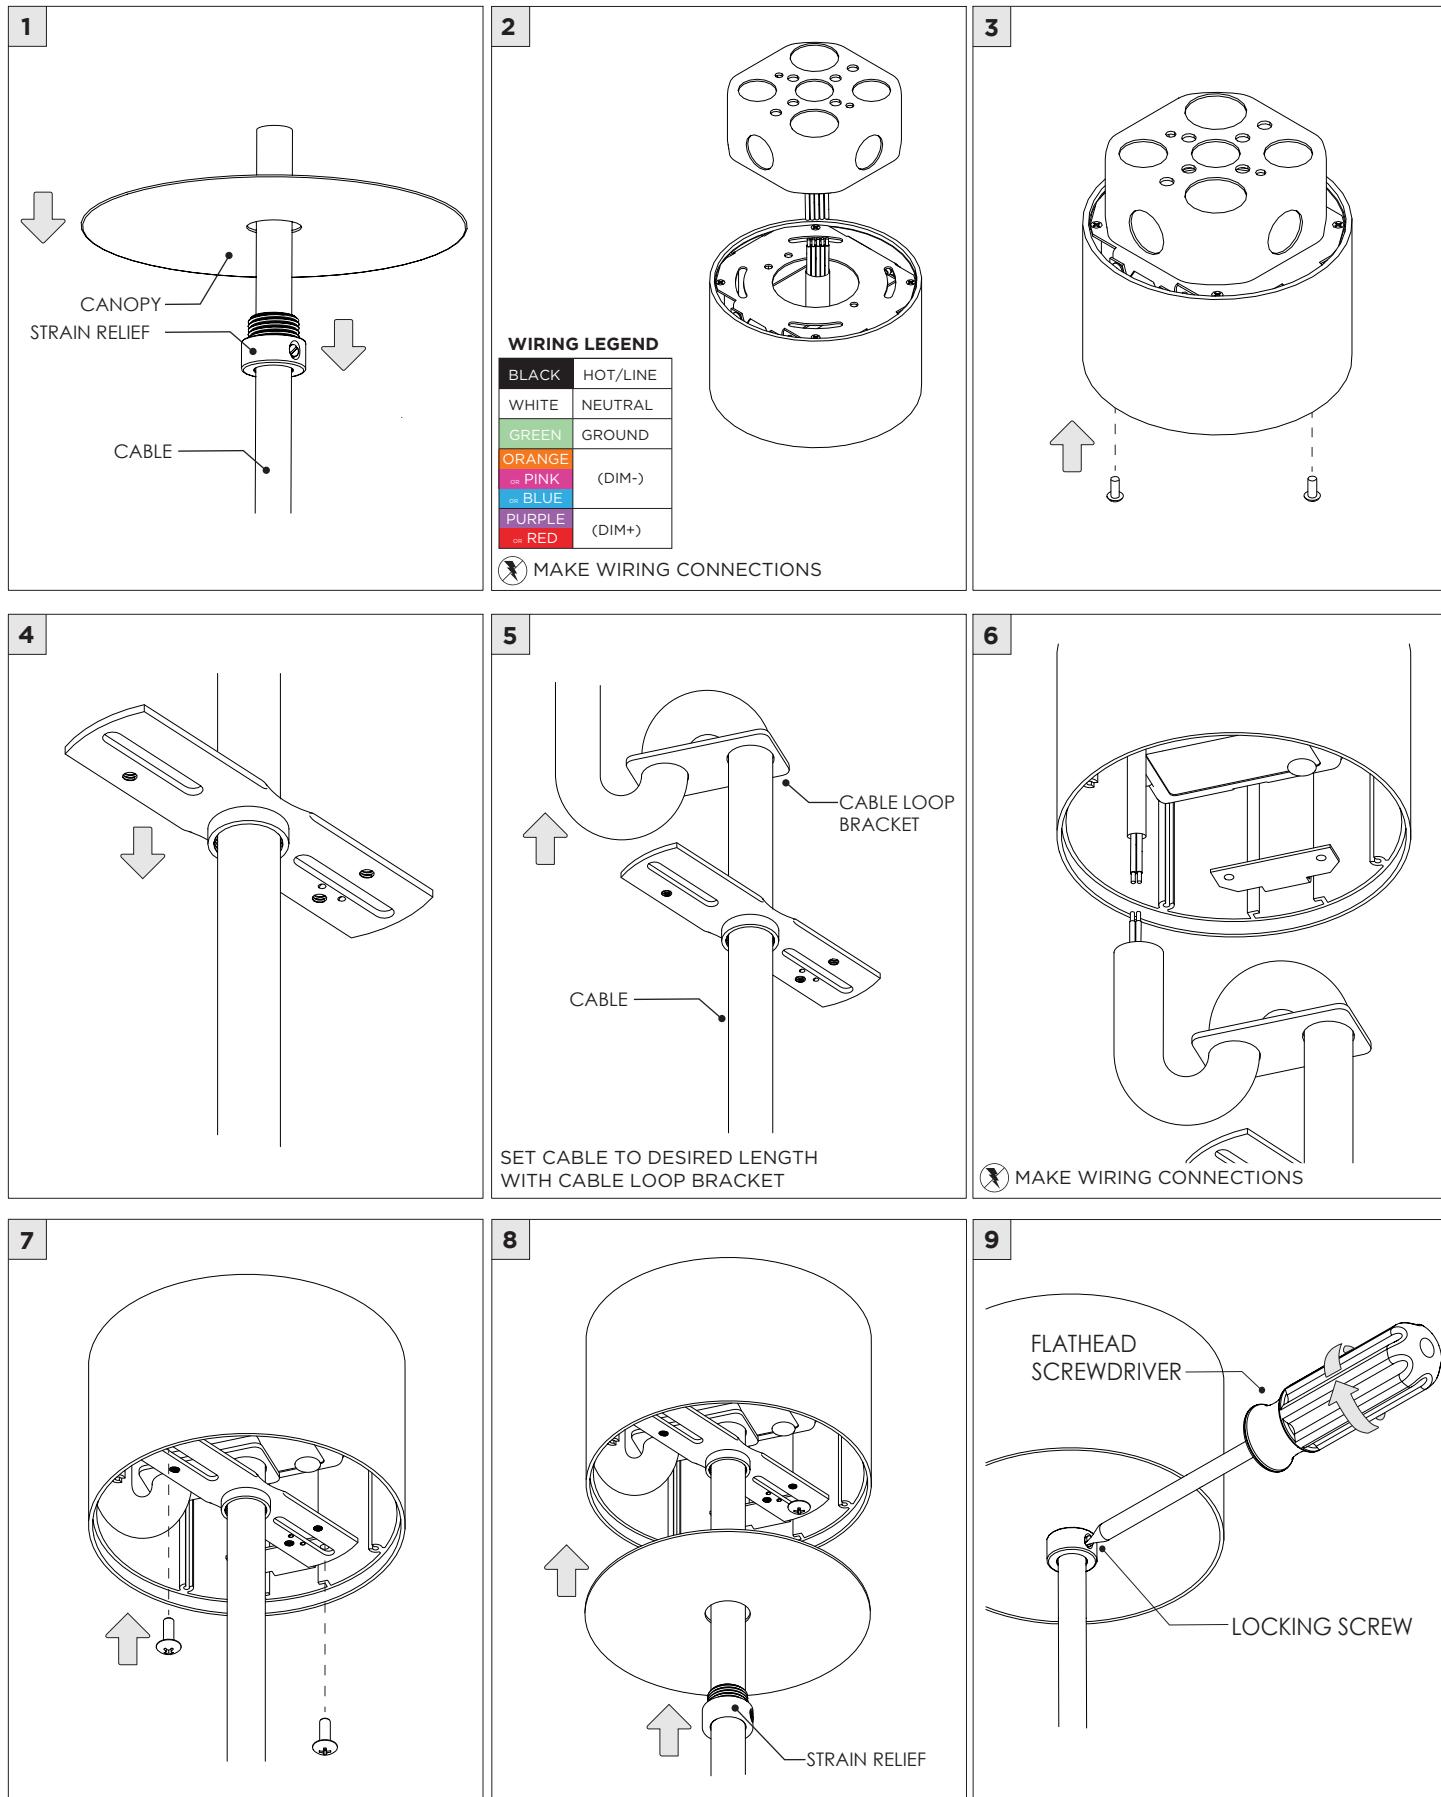

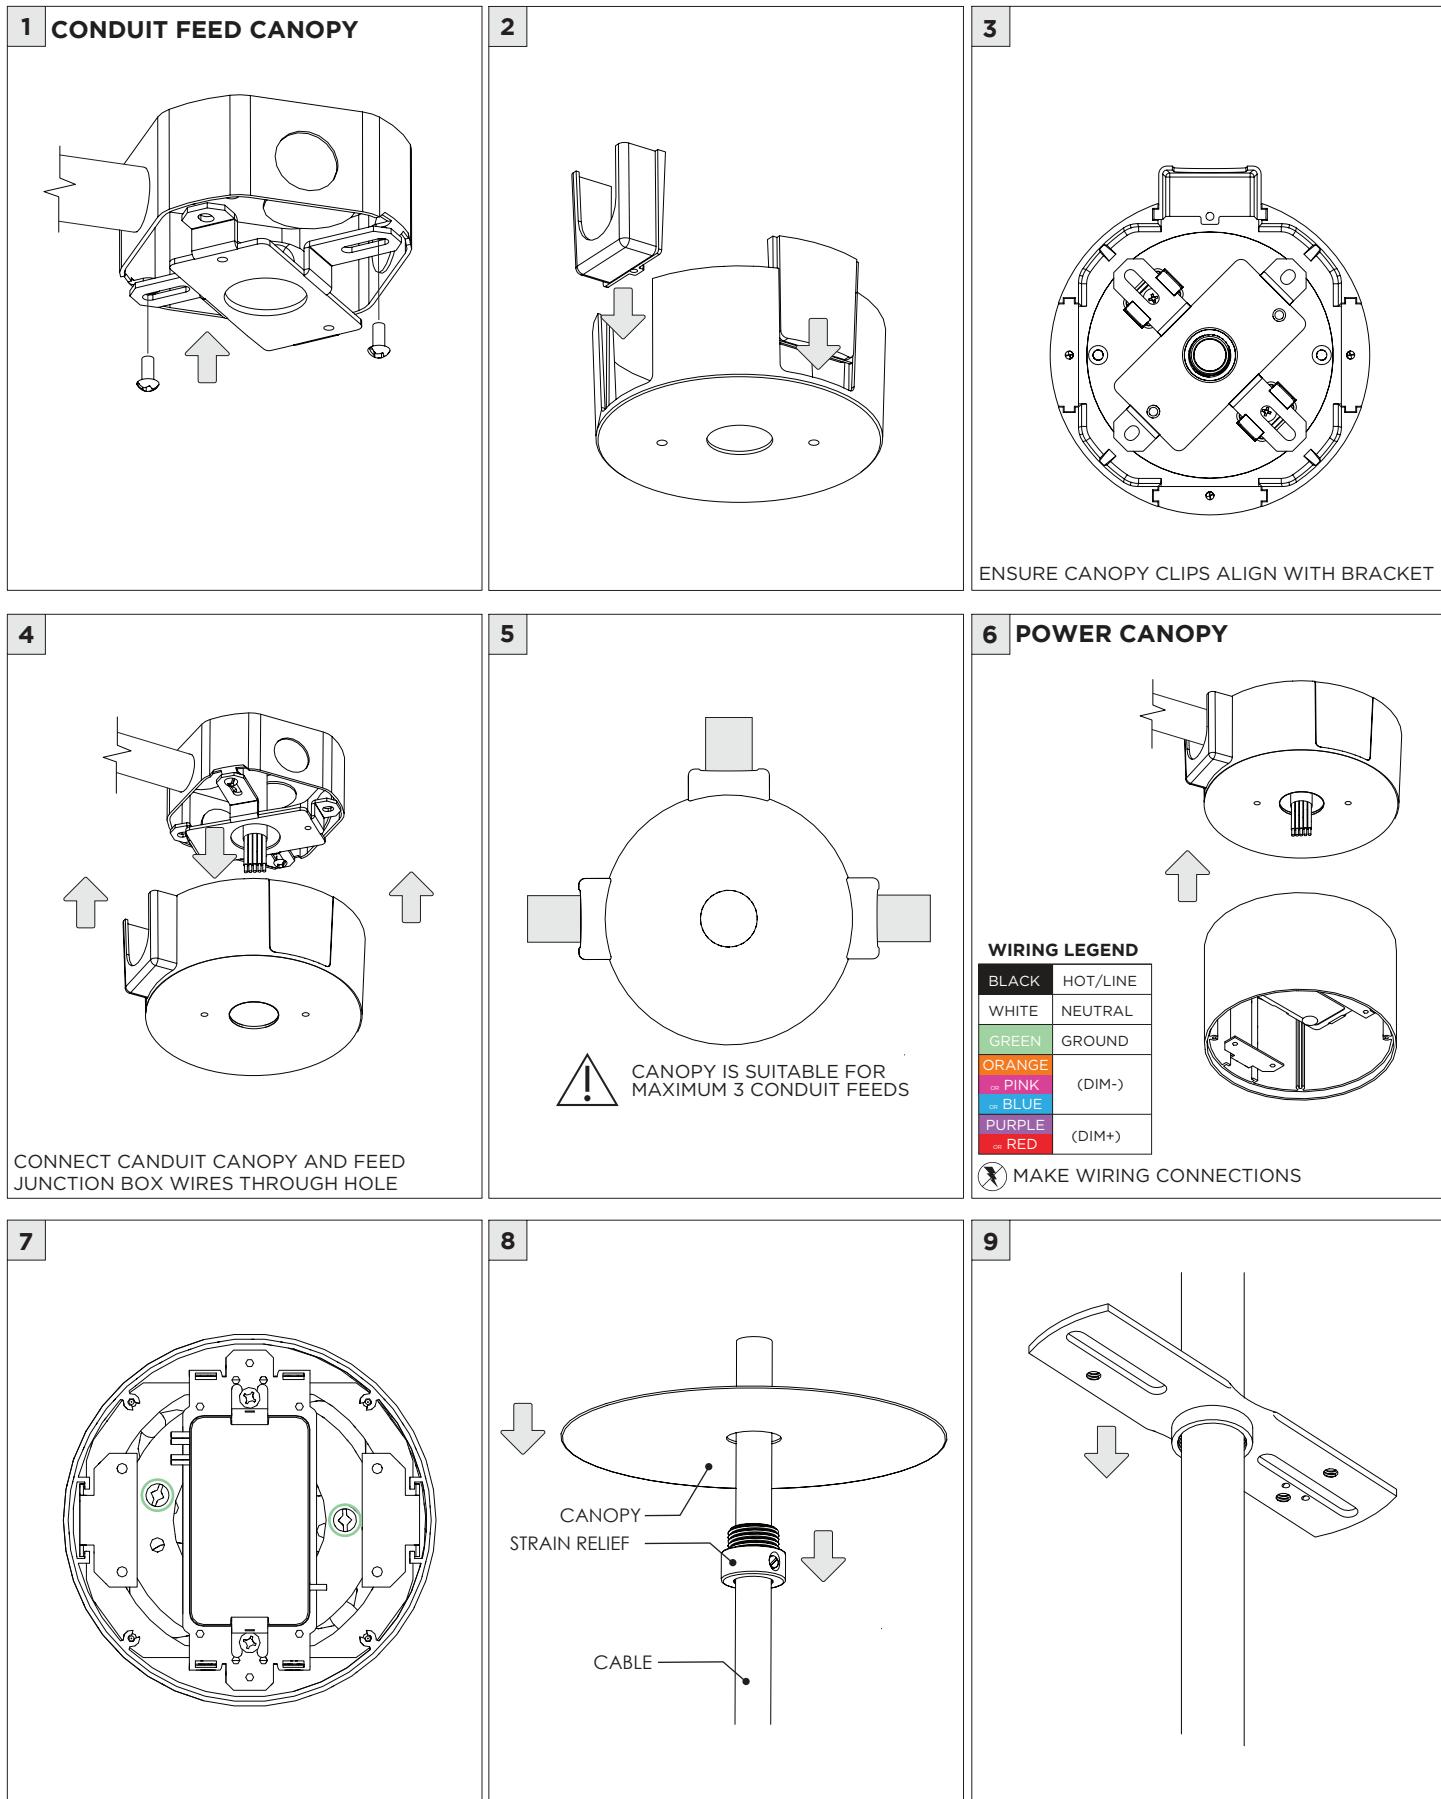

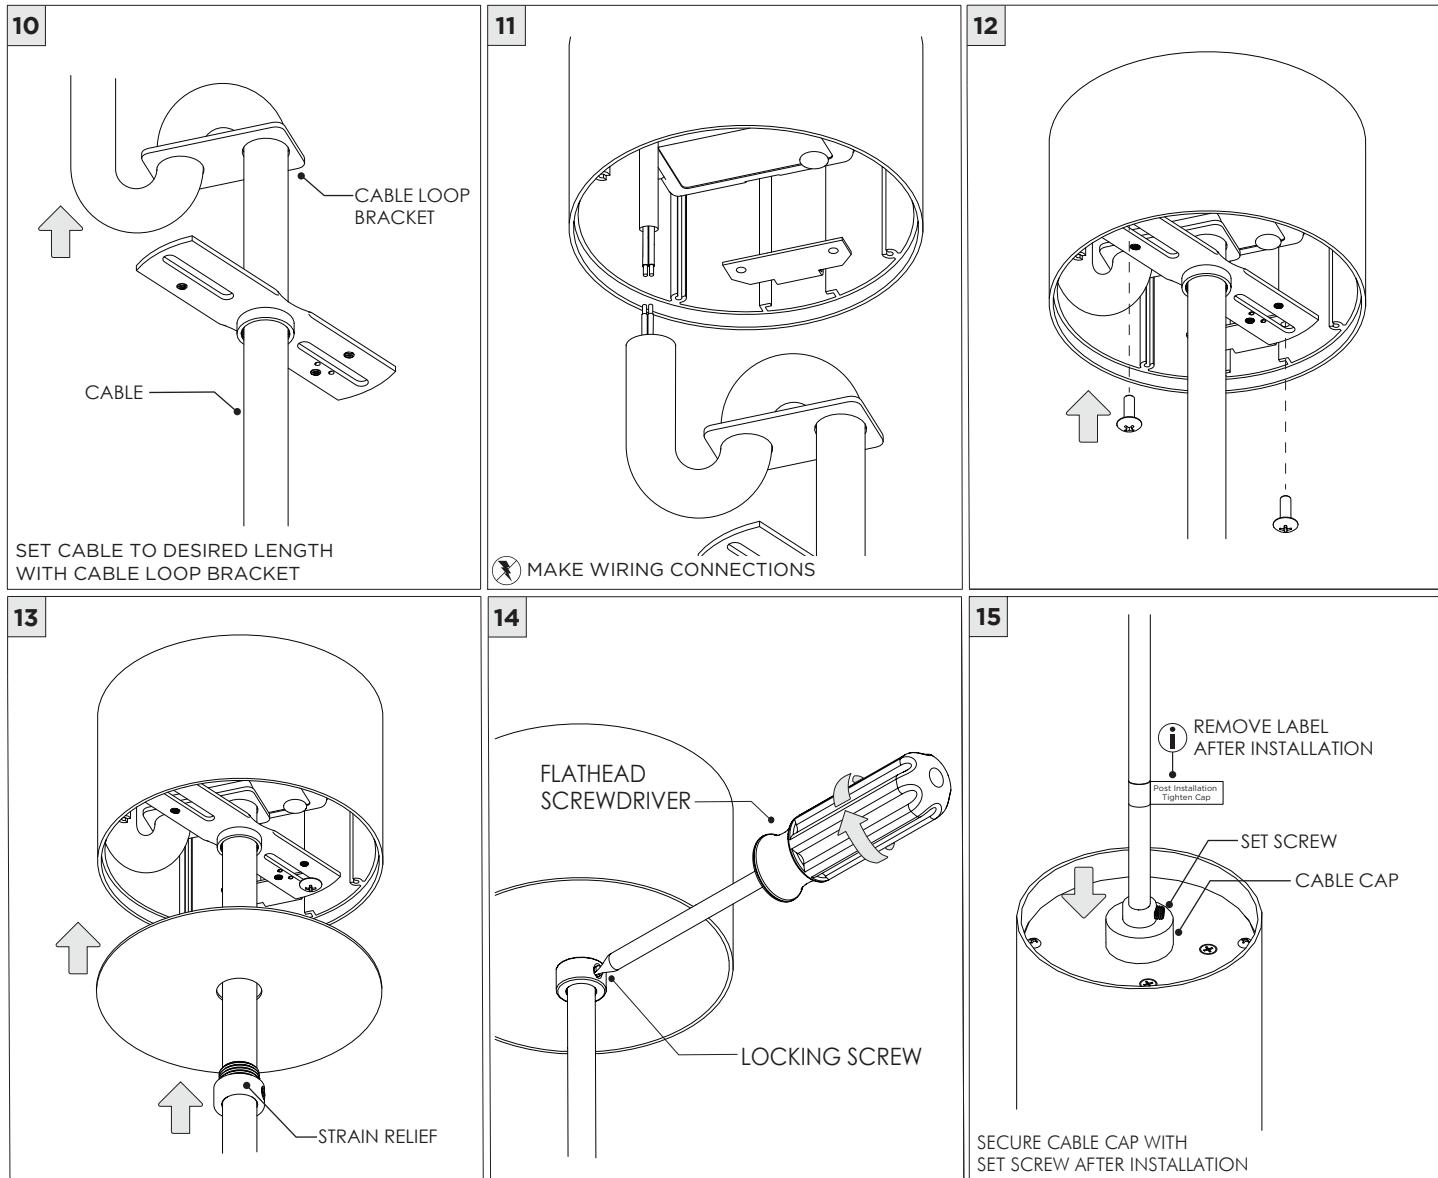


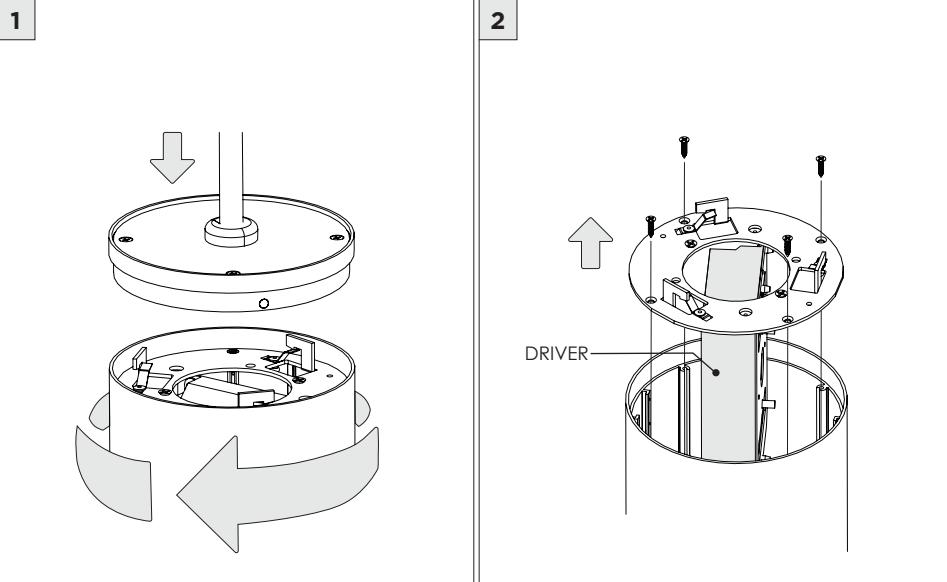**DRIVER SERVICING**

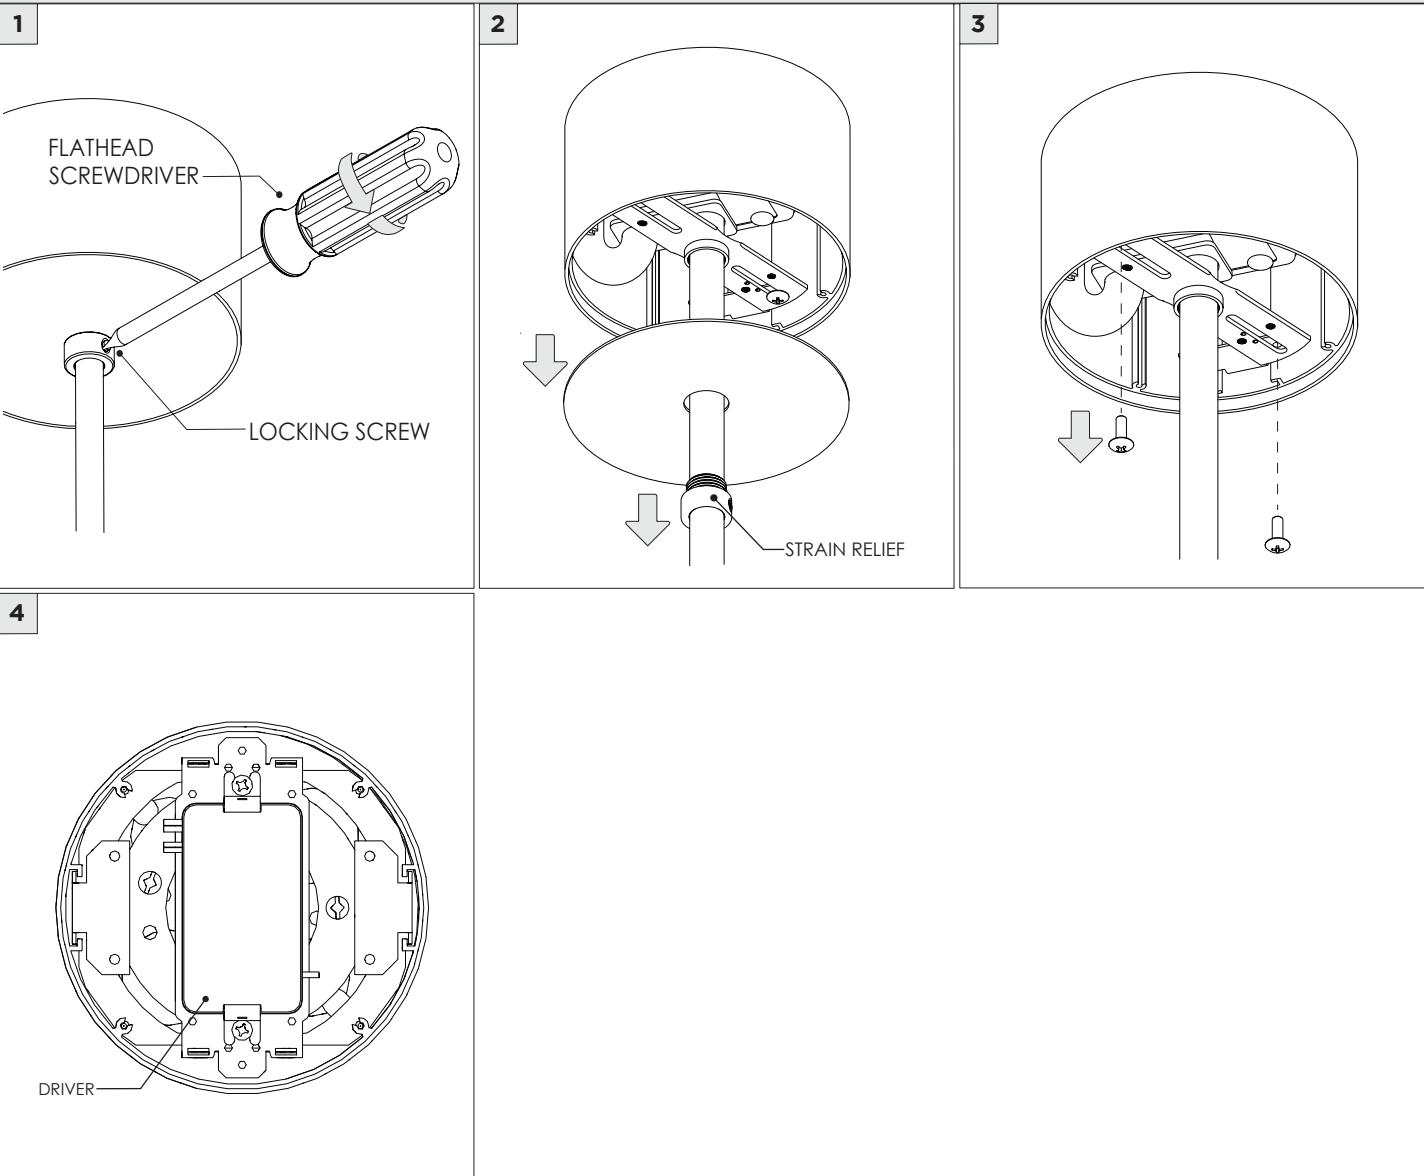
**DRIVER SERVICING**

**LED SERVICING**


**1**

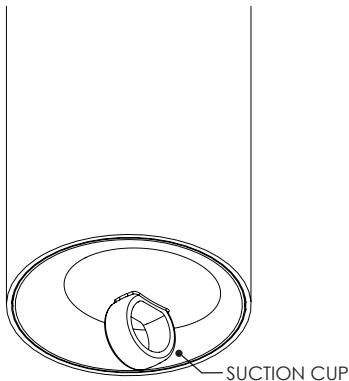


**2**

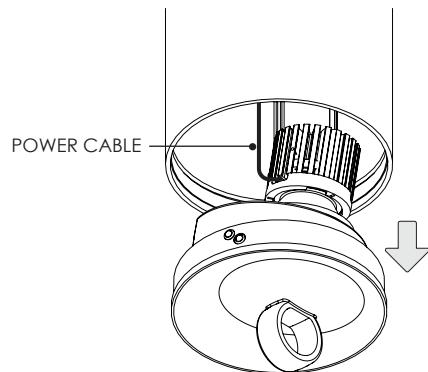


**3**

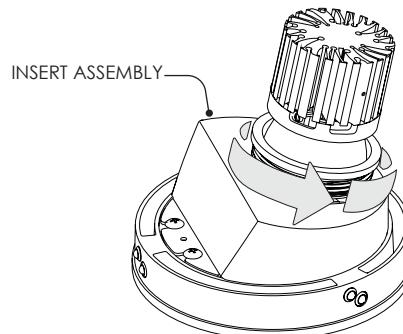


**4 REPLACE LED ASSEMBLY**

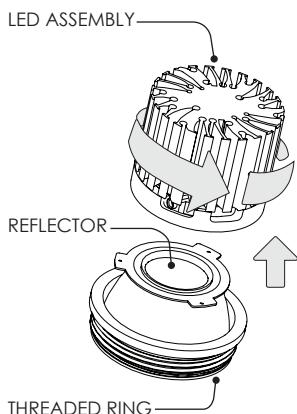

**5**

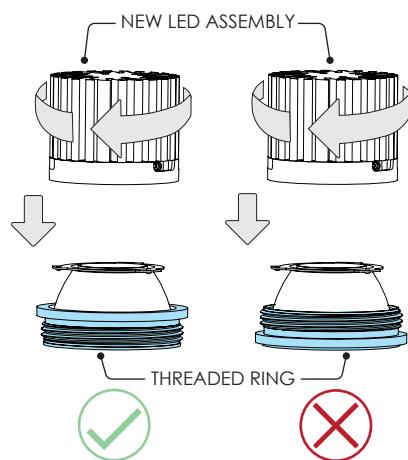


**6**




ENSURE THE HEAT SINK IS ALIGNED WITH INSERT ASSEMBLY AND FULLY TIGHTEN THE THREADED RING

**7**

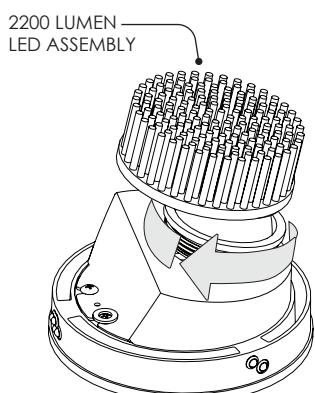

**8**

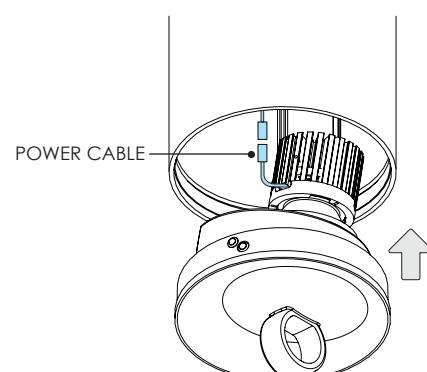

FOR 2200 LUMEN FIXTURES

EXACT LED MODEL MAY VARY