

# 3G LIGHTING

## 3GR-2SLI

2" CURVED SURFACE LINEAR

Narrow 2" aperture curved extruded aluminum housing segments available in radii from 12" to 60"

Angle options: 30°, 45°, 60°, and 90°

Combine with straight segments to create continuous, geometry-driven layouts

High-efficacy LED performance up to 109 lumens per watt

Delivered lumen range up to 1020 lumens per foot

Acrylic lens

1% dimming standard with several driver options


Declare® LBC Red List Free



Red List  
Free

## OPTICS

FLUSH



## SHAPES

This product is designed to be specified using our [online configurator](#). The following configurations are standard offerings.

| RING    | CAPSULE | L-SHAPE   |
|---------|---------|-----------|
|         |         |           |
| U-SHAPE | SQUARE  | RECTANGLE |
|         |         |           |

|                  |  |              |             |
|------------------|--|--------------|-------------|
| <b>PROJECT:</b>  |  | <b>TYPE:</b> |             |
| <b>CATALOG#:</b> |  | <b>DATE:</b> | <b>QTY:</b> |

| CAT. NO                                                            | RUN TYPE                                                                                                                                                                                                                                                                                | RADIUS                                                          | LUMEN OUTPUT                                                                                                                                                                                                                                    |
|--------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>3GR-2SLI</b>                                                    | <b>O</b> - ____' (RING)<br><b>P</b> - ____'X ____' (CAPSULE)<br><b>L</b> - ____'X ____' (L-SHAPE)<br><b>U</b> - ____'X ____'X ____' (U-SHAPE)<br><b>SQ</b> - ____'X ____' (SQUARE)<br><b>R</b> - ____'X ____' (RECTANGLE)<br><b>CUS</b> - CUSTOM SHAPE<br>(PLEASE SUBMIT DRAWING TO 3G) | <b>RA</b> - ____"                                               | <b>D250</b> - 250 LM/FT <sup>1</sup><br><b>D500</b> - 500 LM/FT<br><b>D750</b> - 750 LM/FT<br><b>D1000</b> - 1000 LM/FT<br><b>DC</b> ____ - CUSTOM OUTPUT<br>(SPECIFY LM/FT)<br><br>All lumen outputs are<br><b>delivered lumens</b> at 90+ CRI |
|                                                                    |                                                                                                                                                                                                                                                                                         | <small>*Capsule shape does not require Radius selection</small> |                                                                                                                                                                                                                                                 |
| CRI                                                                | COLOR TEMP                                                                                                                                                                                                                                                                              | VOLTAGE                                                         | DRIVER                                                                                                                                                                                                                                          |
| <b>H90</b> - 90+ CRI                                               | <b>27K</b> - 2700K<br><b>30K</b> - 3000K<br><b>35K</b> - 3500K<br><b>40K</b> - 4000K                                                                                                                                                                                                    | <b>UNV</b> - 120/277V<br><b>120</b> - 120V                      | <b>DIM</b> - 0-10V (100-1%)<br><b>D01</b> - 0-10V (100-0.1%)<br><b>DALI</b> - DALI (100-1%) <sup>2</sup><br><b>DMX</b> - DMX (100-0%)<br><b>DHL2</b> - LUTRON HI-LUME<br>(1% ECOSYSTEM)                                                         |
| FINISH                                                             | OPTIONS                                                                                                                                                                                                                                                                                 |                                                                 |                                                                                                                                                                                                                                                 |
| <b>WH</b> - WHITE<br><b>BK</b> - BLACK<br><b>SV</b> - SILVER       | <b>EMB</b> - EMERGENCY BATTERY *<br>(INTEGRAL)<br><b>EMC</b> - EMERGENCY CIRCUIT<br><b>MC2</b> - MULTIPLE CIRCUITS<br>(2 ZONES)<br><b>MC3</b> - MULTIPLE CIRCUITS<br>(3 ZONES)                                                                                                          |                                                                 |                                                                                                                                                                                                                                                 |
| <small>All mounting canopies provided in white as standard</small> | <small>*Minimum 4' section</small>                                                                                                                                                                                                                                                      |                                                                 |                                                                                                                                                                                                                                                 |

<sup>1</sup> D250 (250LM/FT) not available in 2' length with DALI, D01, DMX, or DHL2. Specify minimum DC350 for those driver options

<sup>2</sup> DALI-2 (Type 6) provided as standard

## DIRECT PERFORMANCE

|                  | FLUSH        |                |
|------------------|--------------|----------------|
| DELIVERED LUMENS | SYSTEM WATTS | EFFICACY (LPW) |
| 250              | 2.3          | 109            |
| 500              | 4.6          | 109            |
| 750              | 6.9          | 109            |
| 1000             | 9.4          | 106            |

DELIVERED LUMENS PER FOOT BASED ON 90+ CRI, 3500K  
Lumen output and actual wattage may vary +/- 5%

## HOUSING

Extruded aluminum housing with narrow 2" aperture  
Die cast aluminum end caps add 1/4" to each end of luminaire  
Continuous runs available in 1" increments as standard  
LED reflector with high reflectance white powder coated finish  
Standard polyester powder coated matte white finish  
Optional finishes available

## OPTICS

Satin acrylic lens designed for optimal performance and glare control  
Up to 8' continuous lens

## LISTING

ETL listed and conforms to UL1598 standard.  
Certified to CSA22.2 NO.250.0.  
Declare® LBC Red List Free  
Rated for indoor dry or damp locations  
Consult factory for details

## WARRANTY

5 Year Warranty on LED and drivers  
Manufacturer 1 Year warranty for defects in material and workmanship under normal use  
Ambient temperature at fixture should not exceed 25°C

## MULTIPLIERS

| COLOR TEMP | 90+ CRI |
|------------|---------|
| 2700K      | 0.91    |
| 3000K      | 0.97    |
| 3500K      | 1.00    |
| 4000K      | 1.02    |

## ELECTRICAL

Standard 0-10V, constant current drivers with 100-1% dimming range and  
>0.9 power factor  
Standard 120/277V universal voltage with several driver options  
Luminaires are pre-wired with factory installed quick connects and branch circuit wiring  
All drivers are integral and easily accessible through luminaire aperture

## EMERGENCY



Integral batteries operate minimum 4' and maximum 6' sections  
15W output (1980lm) for 90 minutes. Title 24 Certified  
4' section (+/- 495lm per foot at 80+ CRI)  
5' section (+/- 395lm per foot at 80+ CRI)  
6' section (+/- 330lm per foot at 80+ CRI)

## LED SYSTEM

Proprietary LED system with color consistency <3 SDCM  
Available in 27K, 30K, 35K, and 40K Standard 90+CRI.  
R9 value of 56 for 90+CRI L90 >60,000 hours  
5 Year Warranty


## MOUNTING

Installation with 3G's proprietary mounting system Internal, that easily connects multiple sections together  
LED reflectors remain within each fixture section during installation with 3G's click and lock spring system  
Adjustable aircraft cable suspension with locking fasteners (60" length standard)  
White cable and white mounting canopies provided as standard  
Suitable for various architectural ceilings (see mounting details)  
Fixture weight: +/- 2.5 lb/ft

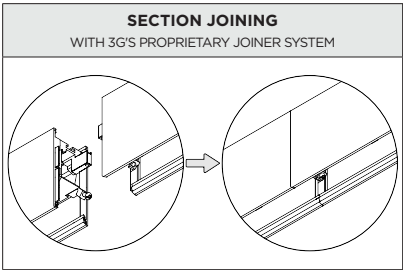
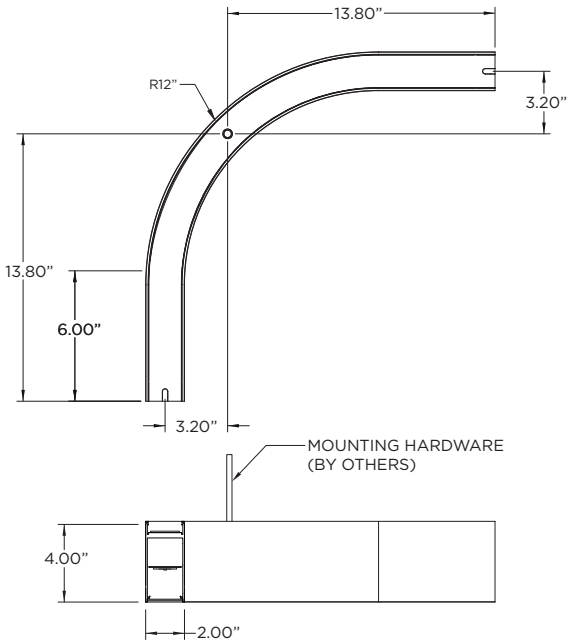


LENS OPTION

FL - FLUSH



MOUNTING DETAILS

| POWER FEED                                                                          | NON POWER FEED                                                                      |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| CONDUIT POWER FEED & CONNECTOR<br>(BY OTHERS)                                       | MOUNTING SCREWS<br>(BY OTHERS)                                                      |
|  |  |

Declare® is a product transparency program administered by the International Living Future Institute (ILFI), providing standardized disclosure of product ingredients, manufacturing location, service life, end-of-life pathways, and Living Building Challenge compliance status.

## PRODUCT FAMILY COVERAGE — LINEAR SYSTEMS

Linear luminaires for suspended, surface, and recessed applications, including perimeter conditions, wall grazing, acoustic lighting, acoustic integration, low-glare multicell runs, and linear systems with integrated downlight modules. Available with flush and drop lens options, multiple distributions including batwing and asymmetric, and a range of lengths and output levels.

## LBC RED LIST FREE

This product family carries a Declare® designation of LBC Red List Free, the highest designation within the Declare program. Products with this designation contain no intentionally added Red List chemicals above applicable Declare reporting thresholds and have been evaluated against the Living Building Challenge Red List.



## BUILDING CERTIFICATION PROGRAMS

Material transparency documentation is increasingly requested as part of building certification programs and owner standards. Declare labels may be used as supporting documentation for project teams pursuing:

- Living Building Challenge (LBC)
- WELL Building Standard™ v1
- WELL Building Standard™ v2
- LEED®
- Other material disclosure and material health initiatives

Project certification requirements are determined at the building level and should be evaluated by the project team.

# Declare.

## Linear Systems 3G Lighting

**Final Assembly:** Woodbridge, Ontario, Canada

**Life Expectancy:** 7+ Year(s)

**End of Life Options:** Recyclable (95%), Landfill (5%)

### Ingredients:

Aluminum UNS A96063; Steel, cold roll UNS G10080; 2-Propenoic acid, 2-methyl-, methyl ester, polymer with ethyl 2-propenoate; Copper UNS C11000; 2-Propenoic acid, butyl ester, polymer with ethenylbenzene and 2-propenenitrile; Carbonic dichloride, polymer with 4,4'-(1-methylethylidene)bis[phenol]; Polyethylene Terephthalate; Pulp, cellulose; Aluminum diethylphosphinate; Benzene, ethenyl-, polymer with 1,3-butadiene, hydrogenated; **Distillates (petroleum), hydrotreated heavy naphthenic**; Polypropylene; Paper; Tin, Organic; Starch, base-hydrolyzed, borated; 2,4,8,10-Tetraoxa-3,9-diphosphaspiro[5.5]undecane, 3,9-bis[2,4-bis(1,1-dimethylethyl)phenoxy]-; Vinyl acetate; Phosphorus; Iron; Zinc; 1,3-Propanediol, 2-ethyl-2-(hydroxymethyl)-

### Living Building Challenge Criteria: Compliant

#### I-13 Red List:

- |                                                       |                             |
|-------------------------------------------------------|-----------------------------|
| <input checked="" type="checkbox"/> LBC Red List Free | % Disclosed: 100% at 100ppm |
| <input type="checkbox"/> LBC Red List Approved        | VOC Content: Not Applicable |
| <input type="checkbox"/> Declared                     |                             |

**I-10 Interior Performance:** Not Applicable

**I-14 Responsible Sourcing:** Not Applicable

XXX-XXXX

EXP. 01 JUN 2027

Original Issue Date: 2026

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY  
INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](https://living-future.org/declare)