


3G LIGHTING

3G-WIN1

1 LIGHT MADISON INFORMA
WALL MOUNTED

Extruded aluminum frame with fabricated mitered corners
Solid aluminum double gimbal with dual axis adjustability
Standard 95+ CRI LED system with performance up to 126 LPW
Delivered lumen range per fixture head up to 3820lm at 95+ CRI
Regressed LED source for enhanced glare control
10° to 90° beam angle options suitable for various applications
Companion to 3G's Madison product family

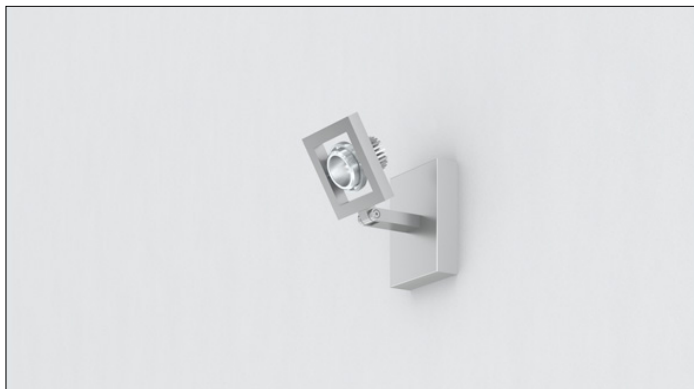

PROJECT:		TYPE:	
CATALOG#:		DATE:	QTY:

CAT. NO	LUMEN OUTPUT**	CRI	COLOR TEMP	BEAM ANGLE	VOLTAGE
3G-WIN1	10 - 1000 LUMENS 15 - 1500 LUMENS 20 - 2000 LUMENS 25 - 2500 LUMENS 30 - 3000 LUMENS 35 - 3500 LUMENS <small>All lumen outputs are delivered lumens at 95+ CRI</small>	H95 - 95+ CRI	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	10D - 10° ¹ 20D - 20° 40D - 40° 60D - 60° 90D - 90° * <small>*90D optic supplied with lens Not available with other lens options</small>	UNV - 120/277V 120 - 120V 347 - 347V ²

DRIVER	GIMBAL FINISH	HOUSING FINISH	OPTIONS
DIM - 0-10V (100-1%) LE - PHASE DIM ³ <small>(TRIAC/ELV, 100-1%)</small> D01 - 0-10V (100-0.1%) DALI - DALI (100-1%) ⁴ DMX - DMX (100-0%) DHL2 - LUTRON HI-LUME LDE1 <small>(1% ECOSYSTEM)</small>	NG - NATURAL ALUMINUM BG - BLACK GIMBAL	AN - CLEAR ANODIZED (STANDARD) BK - BLACK ANODIZED	SF - SOFTENING LENS SB - SANDBLASTED LENS LS - LINEAR SPREAD LENS HXB - BLACK HEXCELL LOUVER EMR - REMOTE EMERGENCY ⁵ BATTERY <small>*Lens option not available with 90D optic Maximum 3 optical accessories</small>

¹ 10D reflector available up to 2000lm

² 347 available in "DIM" 0-10V only (100-1%)

³ Phase dimming options available in 120V only

⁴ DALI-2 (Type 6) provided as standard

⁵ Supplied with enclosure with Emergency Battery and driver. Installed remotely by others. Not accessible through fixture aperture

****** 3G has upgraded our LED system and overall performance at no additional cost. We now offer 95+CRI as standard. All lumen outputs are delivered lumens. This upgraded LED system is more efficient than our previous 80CRI, 90CRI, and 97CRI options. Please see the last page of this spec sheet to cross-reference old lumen outputs with our new, 95+CRI lumen output options

PERFORMANCE

LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
1000	1000	8.7	115
1500	1500	13.1	115
2000	2000	18.6	108
2500	2500	23.2	108
3000	3000	29.5	102
3500	3500	34.7	101

BASED ON 95+ CRI, 3500K, 40D OPTIC
Lumen output and actual wattage may vary +/- 5%

MULTIPLIERS

BEAM ANGLE	
10D	0.92
20D	1.07
40D	1.00
60D	1.00
90D	0.90

COLOR TEMP	
2700K	0.98
3000K	1.00
3500K	1.00
4000K	1.02

HOUSING

Extruded aluminum frame with fabricated mitered corners
Standard clear etched anodized finish with black anodized option
Wall canopy with integral drivers fabricated in cold rolled steel
Canopy powder coated to match frame finish

ADJUSTABILITY

Solid aluminum double gimbal with dual axis adjustability
Each double gimbal can be locked in place

OPTICS

Proprietary anodized, aluminum reflectors
Beam angle available in 10°, 20°, 40° and 60°, and 90°
Reflectors are field replaceable (10° reflector not interchangeable)

LED SYSTEM

Standard 95+ CRI
Color consistency <2 SDCM
Available in 27K, 30K, 35K, and 40K
L90 > 50,000 hours

ELECTRICAL

Standard 0-10V, constant current drivers
100-1% dimming range and >0.9 power factor
Standard 120/277V universal voltage with several driver options
120V Forward Phase/Reverse Phase driver option (100-1%)
Integral drivers are easily accessible above fixture frame

EMERGENCY

7W output for 90 minutes (One fixture head +/- 900lm at 95+ CRI)
Title 24 Certified
Remote emergency battery not accessible through fixture aperture
Maximum remote mounting distance:
3000lm or below - 50ft (12AWG) or 25ft (14AWG)
Above 3000lm - 30ft (12AWG) or 20ft (14AWG)
Caution: Emergency Battery utilizes more than one power source and servicing should be performed by qualified personnel

MOUNTING

Suitable for wall mounted applications
Fixture mounts to a standard junction box


LISTING

ETL listed and conforms to UL1598 standard
Certified to CSA22.2 NO.250.0.
Rated for dry or damp locations

WARRANTY


5 year limited warranty
LED system rated for operation in ambient environments up to 25°C

DRAWINGS AND DIMENSIONS

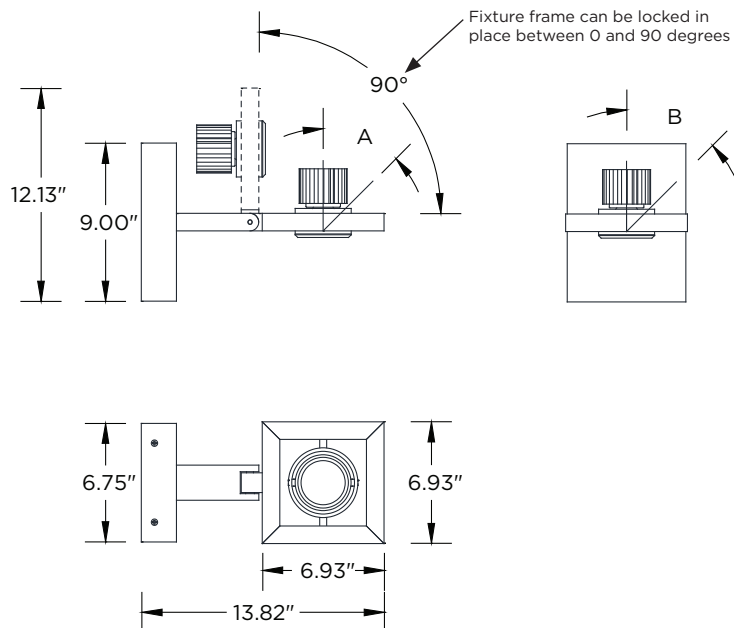

LUMEN OUTPUT	A	B
Up to 3000lm	45°	45°
4000lm	20°	20°

MOUNTING DETAILS

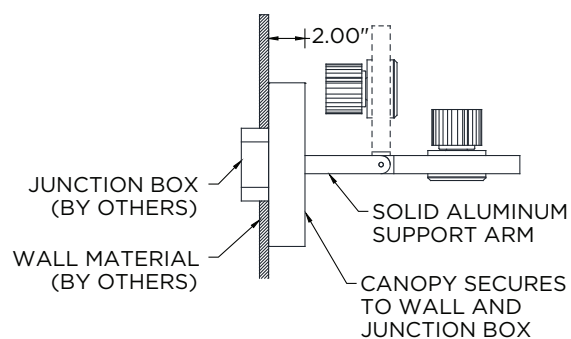

LUMEN OUTPUT REFERENCE CHART

3G has upgraded our LED system and overall performance at no additional cost. We now offer 95+CRI as standard. All lumen outputs are delivered lumens. This new LED system is more efficient than our previous 80CRI, 90CRI, and 97CRI options. Please use these charts to cross-reference old lumen outputs with our new, 95+CRI lumen output options

80CRI REFERENCE CHARTS

MATCH THE GRADIENT SHADE FROM THE OLD LUMEN OUTPUT CHART TO THE NEW LUMEN OUTPUT OPTION

OLD 80CRI SPECS				NEW 95+CRI SPECS			
LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)	LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
1000	1080	10.3	105	1000	1000	8.1	123
1500	1444	14.0	103	1500	1500	12.3	122
2200	2089	22.0	95	2000	2000	16.2	123
3000	2815	31.1	90	2500	2500	20.5	122
4000	3958	43.0	92	3000	3000	25.8	116
				4000	4000	34.2	117

90CRI REFERENCE CHARTS

MATCH THE GRADIENT SHADE FROM THE OLD LUMEN OUTPUT CHART TO THE NEW LUMEN OUTPUT OPTION

OLD 90CRI SPECS				NEW 95+CRI SPECS			
LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)	LUMEN OUTPUT	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
1000	951	10.3	92	1000	1000	8.1	123
1500	1271	14.0	91	1500	1500	12.3	122
2200	1838	22.0	84	2000	2000	16.2	123
3000	2477	31.1	79	2500	2500	20.5	122
4000	3483	43.0	81	3000	3000	25.8	116
				4000	4000	34.2	117