



3GQ-DL33RF70

3" ROUND FIXED
DEEP REGRESS



Small 3" deep regress, high performance downlight
Regressed LED source for enhanced glare control
Lumen range up to 2000lm
2 SCDM, Citizen LED source available in 30K and 35K (80+ CRI)
Universal voltage, 0-10V integral driver with 100-1% dimming range
Shallow housing available along with other housing options

10 DAY QUICKSHIP
MAX ORDER SIZE: 50 pcs

PROJECT:		TYPE:	
CATALOG#:		DATE:	QTY:

CAT. NO	LUMEN OUTPUT	CRI	COLOR TEMP	BEAM ANGLE	VOLTAGE
3GQ-DL33RF70	10 - 1000 LUMENS 15 - 1500 LUMENS * 20 - 2000 LUMENS 25 - 2500 LUMENS *JA8 (Title 24) max lumen output is 1500lm.	H95 - 95+ CRI	30K - 3000K 35K - 3500K 40K - 4000K	10D - 10° 20D - 20° 40D - 40° 60D - 60°	UNV - 120/277
DRIVER	FLANGE TYPE	BEVELED INSERT	HOUSING TYPE	OPTIONS	
DIM - 0-10V (100-1%)	WT - WHITE TRIM XTR - TRIMLESS (MUD-IN DRYWALL)	WI - WHITE	RMD - REMODEL (NON-IC) NCF - NEW CONSTRUCTION FRAME (NON-IC) SH - SHALLOW HOUSING (IC RATED) NC - NEW CONSTRUCTION HOUSING (NON-IC) IC - NEW CONSTRUCTION IC HOUSING NCF and SH housings ship nailer type bar hangers NC and IC housings ship with C-channel bar hangers	WL - WET LOCATION CP - CHICAGO PLENUM ¹	

¹ Chicago Plenum option available with Shallow Housing and New Construction Housing


Refer to standard specification sheets for complete details. Please note that only options shown above qualify for 10 day 3GQ program




3GQ-DL33RF70
3" ROUND FIXED DEEP REGRESS

TRIM HOUSING OPTIONS


RMD - REMODEL (NON-IC)

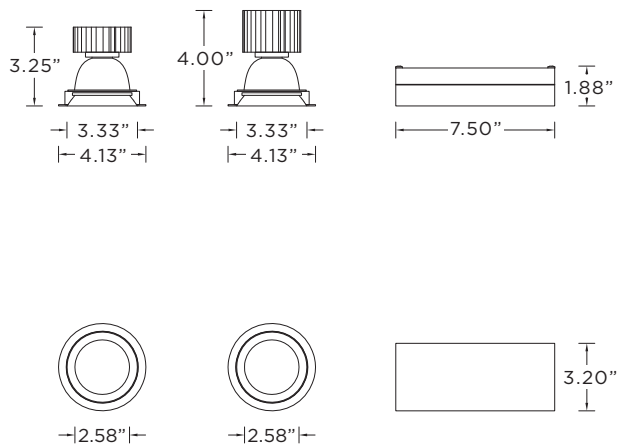


NCF - NEW CONSTRUCTION FRAME (NON-IC)

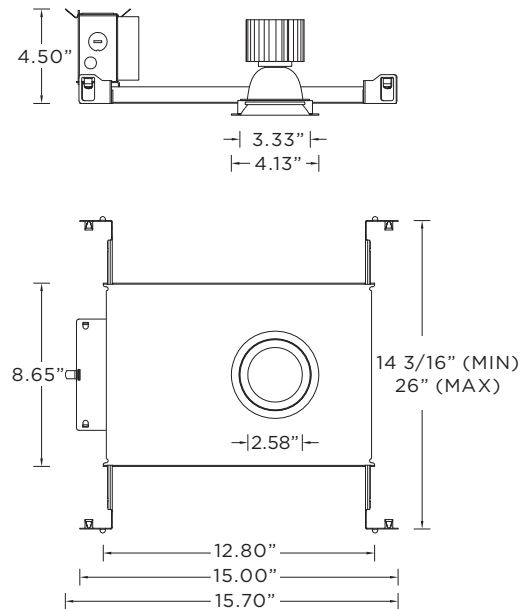

SH - SHALLOW HOUSING (IC AND CHICAGO PLENUM RATED)

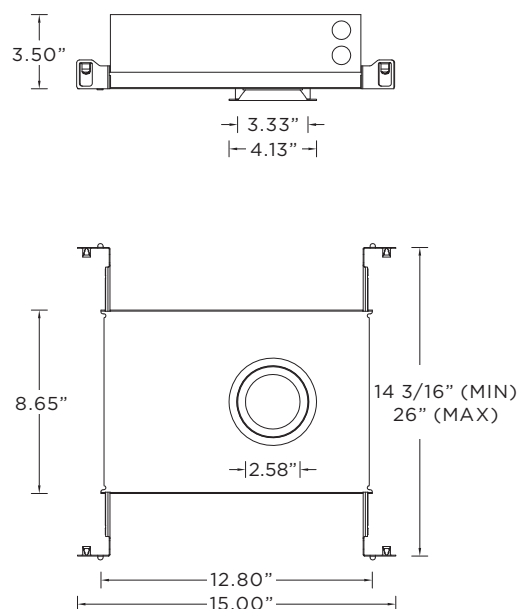

NC - NEW CONSTRUCTION HOUSING (NON-IC AND CP RATED)

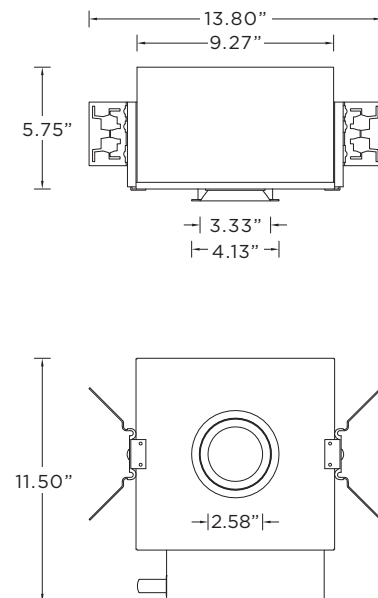





3GQ-DL33RF70
3" ROUND FIXED DEEP REGRESS

TRIMLESS HOUSING OPTIONS


RMD - REMODEL (NON-IC)

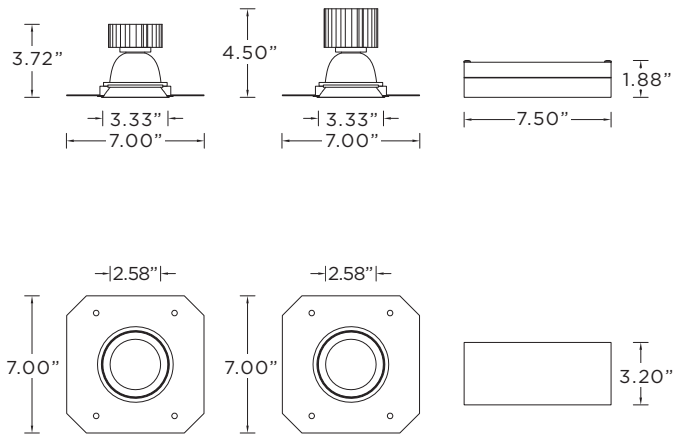


NCF - NEW CONSTRUCTION FRAME (NON-IC)

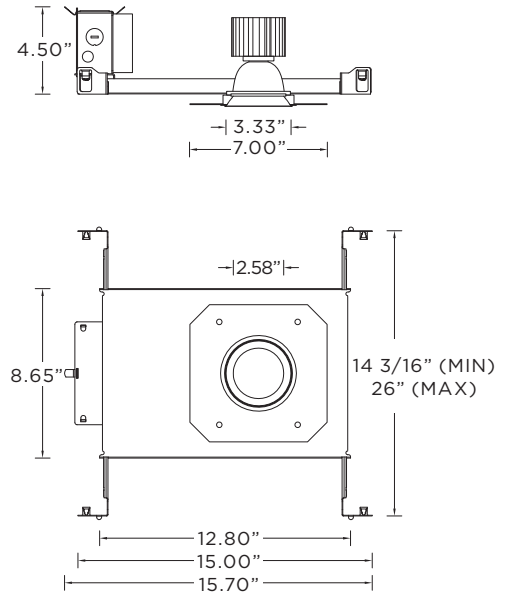

SH - SHALLOW HOUSING (IC AND CHICAGO PLENUM RATED)

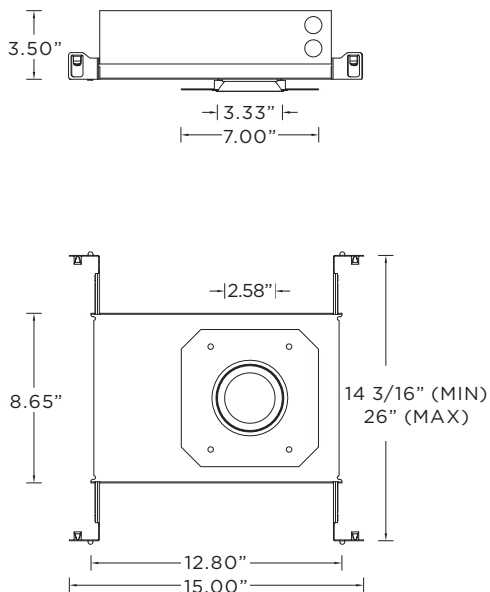

NC - NEW CONSTRUCTION HOUSING (NON-IC AND CP RATED)

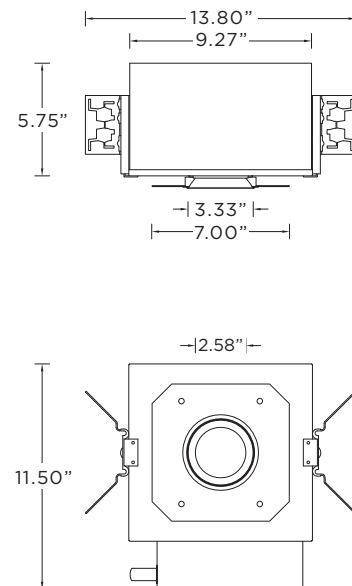

Declare® is a product transparency program administered by the International Living Future Institute (ILFI), providing standardized disclosure of product ingredients, manufacturing location, service life, end-of-life pathways, and Living Building Challenge compliance status.

PRODUCT FAMILY COVERAGE — DOWNLIGHTS

Recessed downlights for general, accent, and wall wash applications. Available in fixed and adjustable configurations with multiple beam angles, lumen packages, 95+ CRI as standard, low-glare/UGR-rated options, and multiple trim conditions. Options include adjustable modules, dual-axis gimbals, and low-glare multicell optics.

LBC RED LIST FREE

This product family carries a Declare® designation of LBC Red List Free, the highest designation within the Declare program. Products with this designation contain no intentionally added Red List chemicals above applicable Declare reporting thresholds and have been evaluated against the Living Building Challenge Red List.



BUILDING CERTIFICATION PROGRAMS

Material transparency documentation is increasingly requested as part of building certification programs and owner standards. Declare labels may be used as supporting documentation for project teams pursuing:

- Living Building Challenge (LBC)
- WELL Building Standard™ v1
- WELL Building Standard™ v2
- LEED®
- Other material disclosure and material health initiatives

Project certification requirements are determined at the building level and should be evaluated by the project team.

Declare.

Downlight Products 3G Lighting

Final Assembly: Woodbridge, Ontario, Canada

Life Expectancy: 7+ Year(s)

End of Life Options: Recyclable (95%), Landfill (5%)

Ingredients:

Steel, cold roll UNS G10080; Aluminum UNS A96063; Aluminum; Pulp, cellulose; Nylon 6; 2-Propenoic acid, butyl ester, polymer with ethenylbenzene and 2-propenenitrile; Carbonic dichloride, polymer with 4,4'-(1-methylethylidene)bis[phenol]; Paper; Soda lime; Starch, base-hydrolyzed, borated; Magnesium; 2,4,8,10-Tetraoxa-3,9-diphosphaspiro[5.5]undecane, 3,9-bis[2,4-bis(1,1-dimethylethyl)phenoxy]-; Silicon; Vinyl acetate; 1,3-Propanediol, 2-ethyl-2-(hydroxymethyl)-; Chromium, metallic

Living Building Challenge Criteria: Compliant

I-13 Red List:

- | | |
|---|-----------------------------|
| ☒ LBC Red List Free | % Disclosed: 100% at 100ppm |
| ☐ LBC Red List Approved | VOC Content: Not Applicable |
| ☐ Declared | |

I-10 Interior Performance: Not Applicable

I-14 Responsible Sourcing: Not Applicable

GLG-0004

EXP. 01 JUN 2027

Original Issue Date: 2026

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare