
3.3”/4.5" ROUND WALLWASH DOWNLIGHT


TRIMLESS

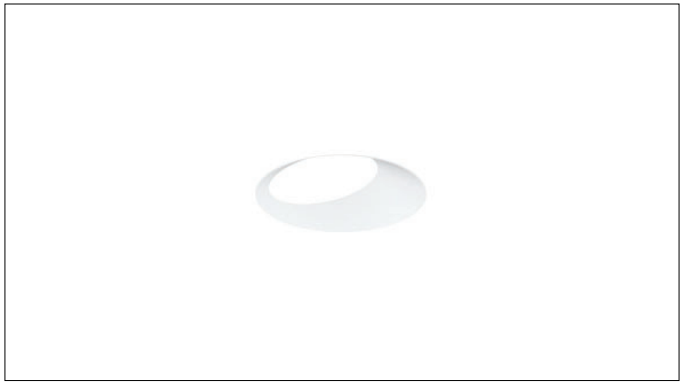

ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT


INCLUDED COMPONENTS

RMD - REMODEL




LED INSERT | MUDDING FLANGE | DRIVER ENCLOSURE | BLOCKING SUPPORT PLATE

NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)

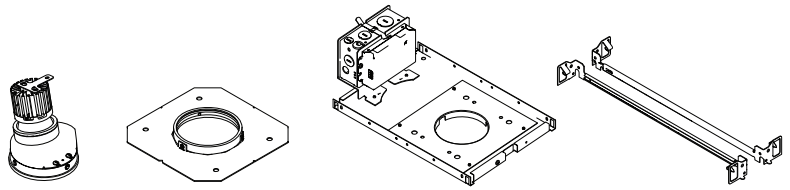


LED INSERT | MUDDING FLANGE | NEW CONSTRUCTION FRAME | BAR HANGERS

SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)

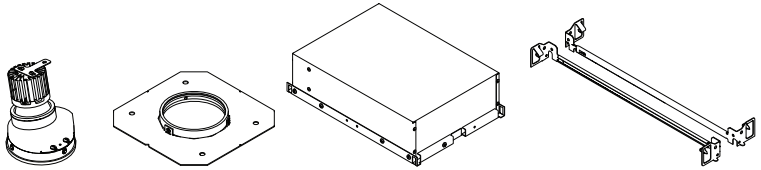

LED INSERT | MUDDING FLANGE | SHALLOW HOUSING | BAR HANGERS

NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)

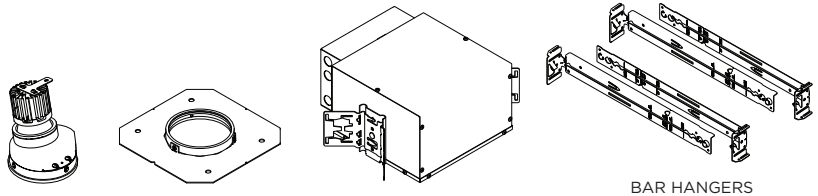

LED INSERT | MUDDING FLANGE | NEW CONSTRUCTION HOUSING | BAR HANGERS (OPTIONAL)

INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL ⓘ ATTENTION POWER ON POWER OFF	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING


3G LIGHTING

3.3”/4.5" ROUND WALLWASH DOWNLIGHT
TRIMLESS

INSTALLATION INSTRUCTIONS


RMD - REMODEL

1




FIXTURE TYPE	CEILING HOLE SIZE
DL33RWW	⦰3.8125”
DL45RWW	⦰5.1250”

2

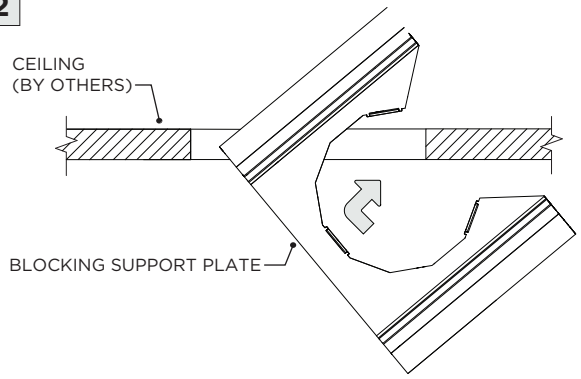


ROTATE BLOCKING SUPPORT PLATE THROUGH CEILING CUTOUT

3

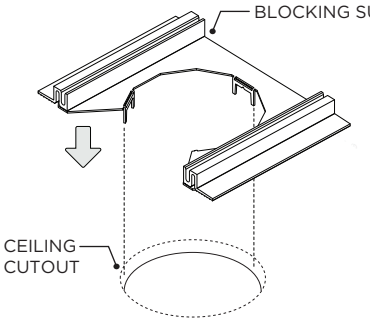


4

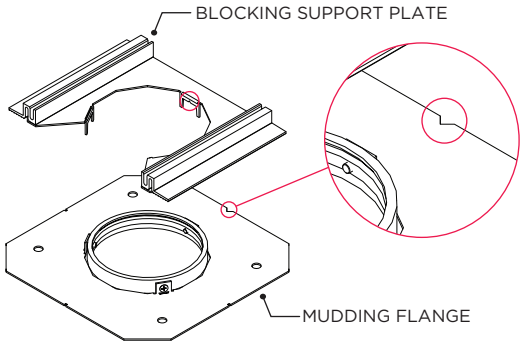


BEFORE SECURING MUDDING FLANGE TO CEILING - ENSURE NOTCHES ON BLOCKING SUPPORT PLATE AND MUDDING FLANGE ARE ALLIGNED

5

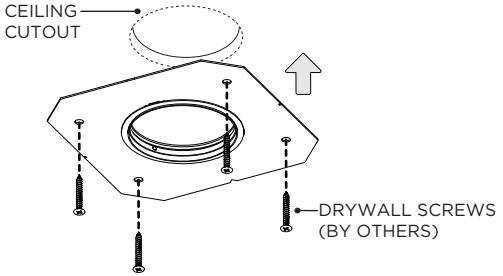


SECURE MUDDING FLANGE TO CEILING

6

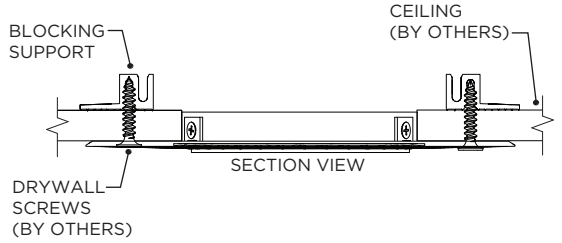


7

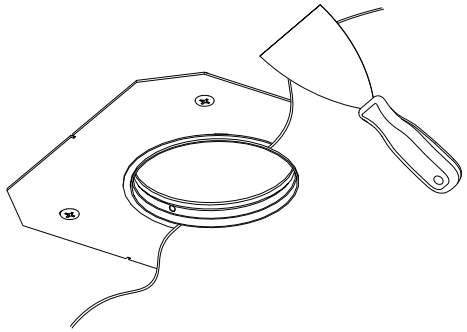


APPLY MUDDING COMPOUND (BY OTHERS) TO CEILING

8

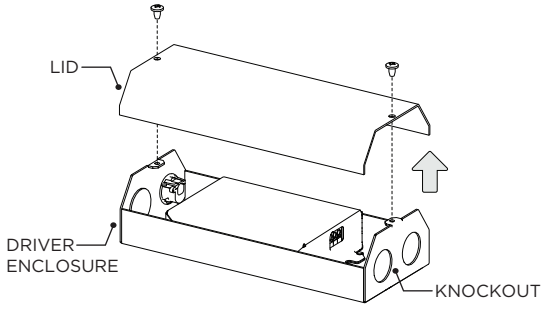

REMOVE LID AND KNOCKOUT FROM DRIVER ENCLOSURE

9

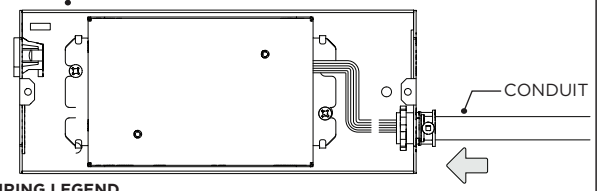


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)


CONNECT CONDUIT TO DRIVER ENCLOSURE AND MAKE WIRING CONNECTIONS

10




SECURE LID ONTO DRIVER ENCLOSURE AND INSERT INTO CEILING

10A




INSERT DRIVER ENCLOSURE THROUGH CUTOUT AND REST ABOVE CEILING

11

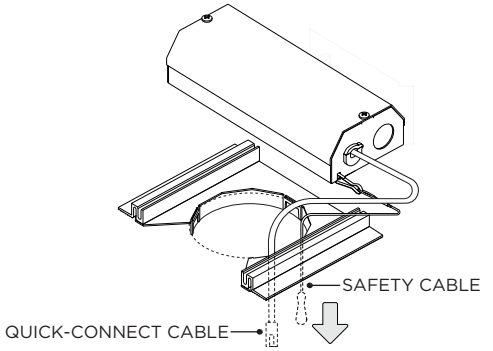


FEED SAFETY CABLE & QUICK-CONNECT CABLE THROUGH CEILING CUTOUT

12

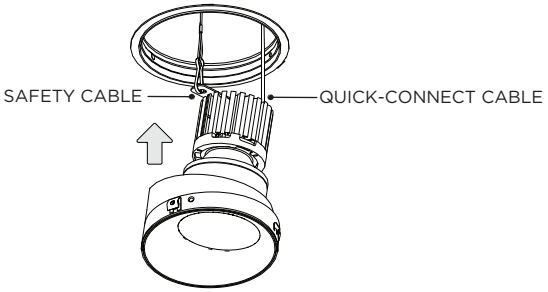

INSERT LED ASSEMBLY INTO CEILING


12A

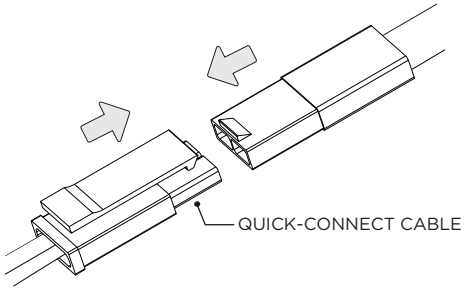

CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY


RMD - REMODEL WITH REMOTE DRIVER ENCLOSURE

1 REMOTE DRIVER WIRING

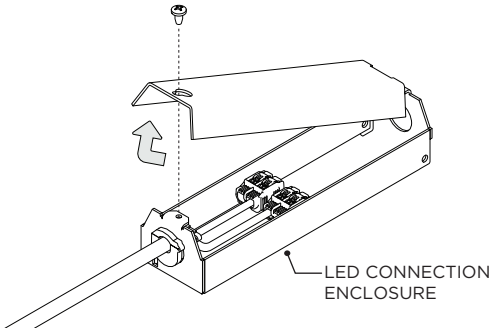

FOR REMOTE EMR DRIVER BOX, MAKE WIRED CONNECTIONS INSIDE PROVIDED LED CONNECTION ENCLOSURE

2

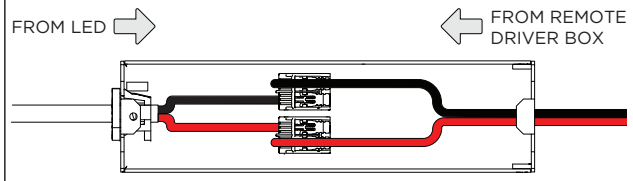

MAKE WIRING CONNECTIONS


3G LIGHTING

3.3”/4.5" ROUND WALLWASH DOWNLIGHT
TRIMLESS


INSTALLATION INSTRUCTIONS

NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)

1

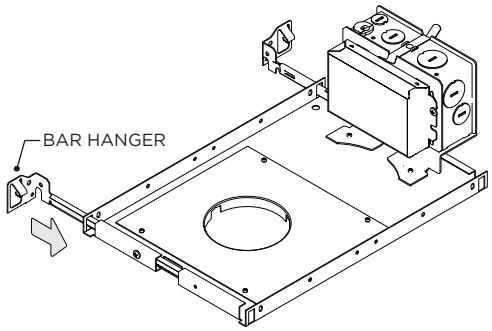


2

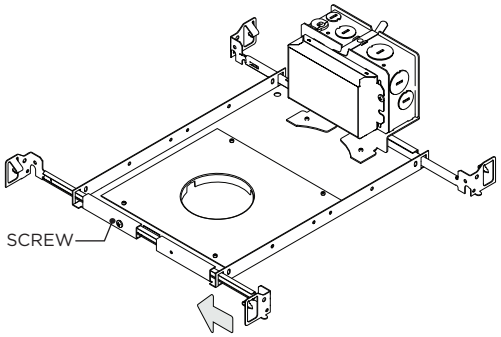


SECURE BAR HANGERS IN PLACE WITH SCREW

3

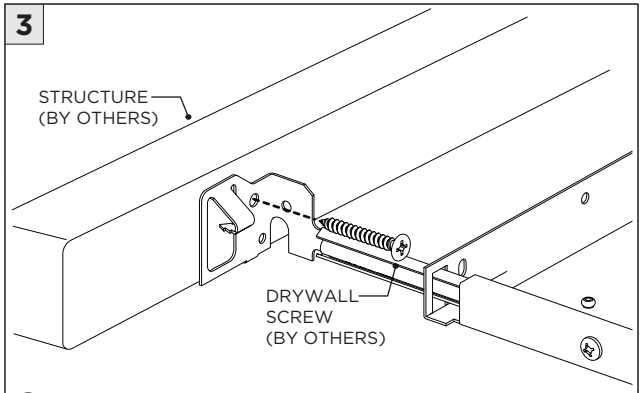


BAR HANGERS HAVE 14” to 26” EXTENSION

4

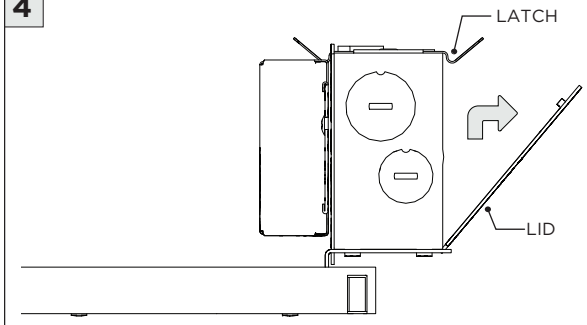

REMOVE ELECTRICAL BOX LID TO ACCESS WIRING

5

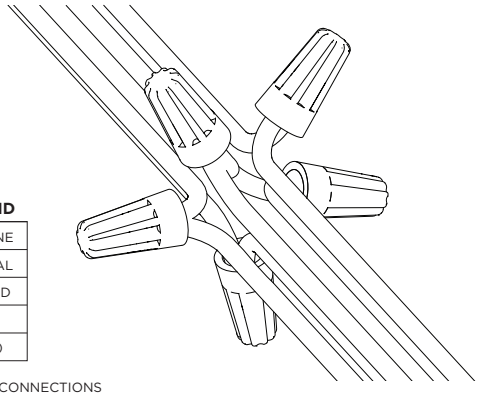


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)


MAKE WIRING CONNECTIONS

6 FOR INTEGRATED BATTERY ONLY

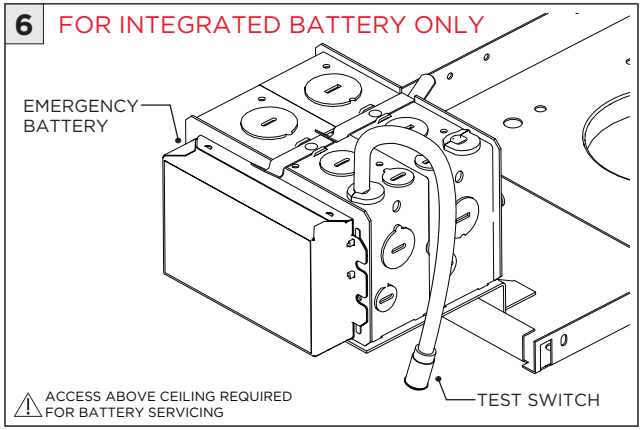


ACCESS ABOVE CEILING REQUIRED FOR BATTERY SERVICING

6A

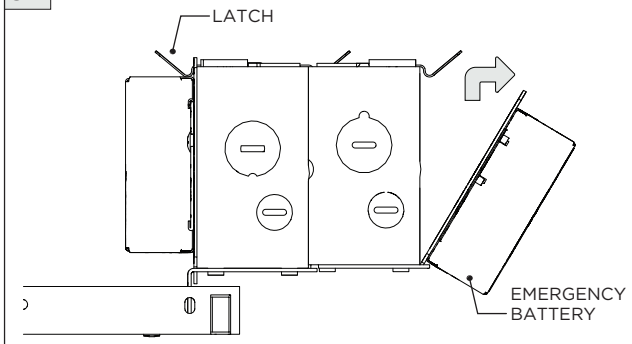

REMOVE BATTERY BOX COVER TO ACCESS WIRING

7

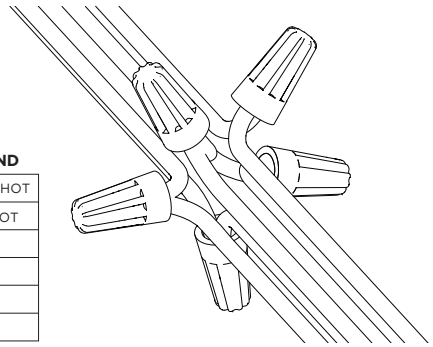


EMB WIRING LEGEND

RED	UNSWITCHED HOT
BLACK	SWITCHED HOT
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS


8



FIXTURE TYPE	CEILING HOLE SIZE
DL33RWW	⦰ 3.8125”
DL45RWW	⦰ 5.1250”


INSTALL CEILING BELOW FIXTURE

9

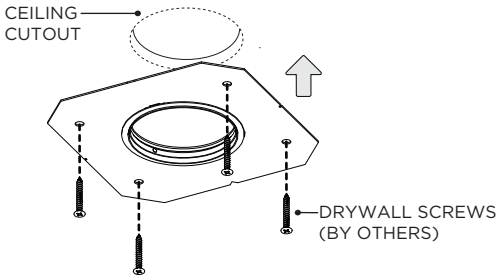


SECURE MUDDING FLANGE TO CEILING

9A

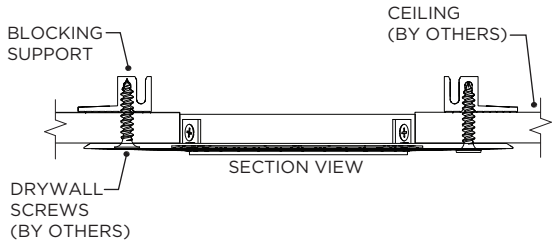


10

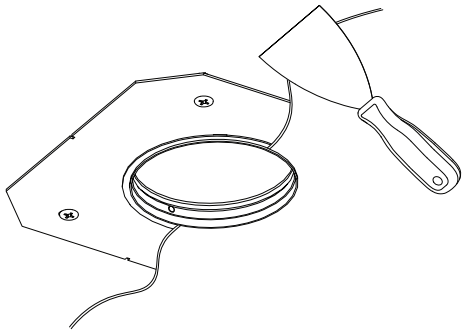


APPLY MUDDING COMPOUND (BY OTHERS) TO CEILING

11

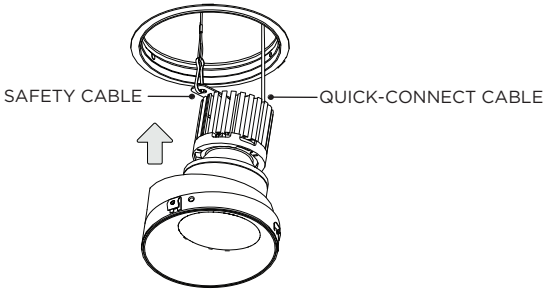

INSERT LED ASSEMBLY INTO CEILING

11A

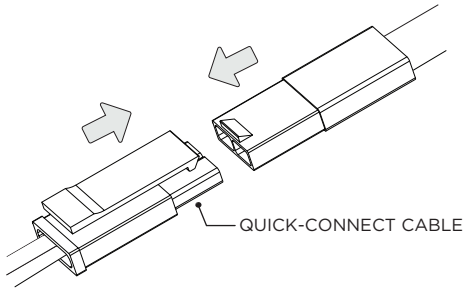

CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY


3G LIGHTING

3.3”/4.5" ROUND WALLWASH DOWNLIGHT
TRIMLESS


INSTALLATION INSTRUCTIONS

SH - SHALLOW HOUSING (FOR NEW CONSTRUCTION ONLY)

1

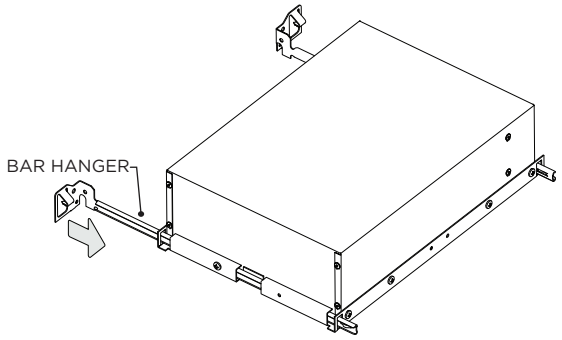


2

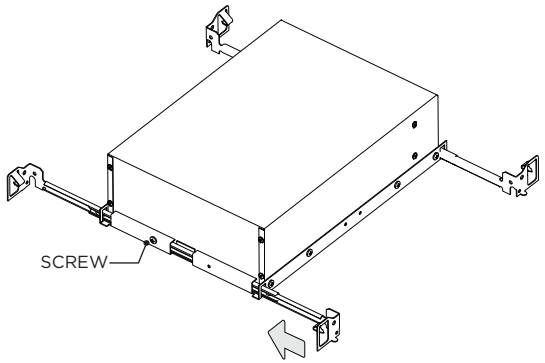


SECURE BAR HANGERS IN PLACE WITH SCREW

3

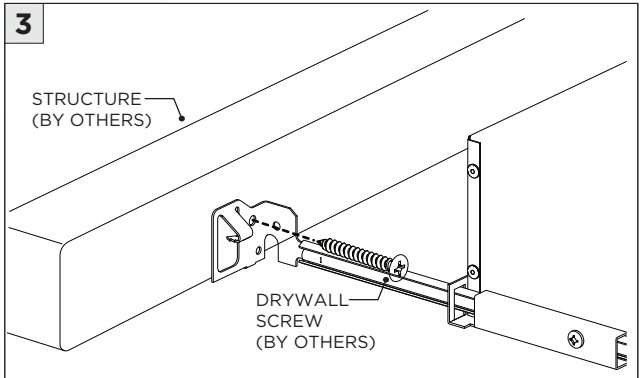


4

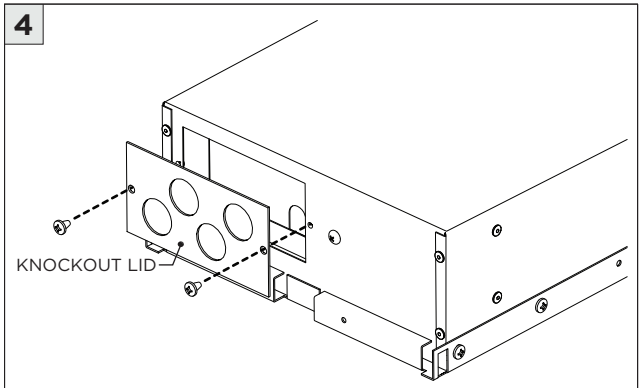

REMOVE ELECTRICAL BOX KNOCKOUT LID TO ACCESS WIRING

4A

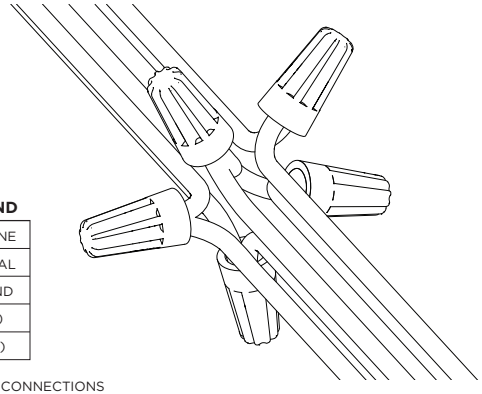


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS


5



FIXTURE TYPE	CEILING HOLE SIZE
DL33RWW	⦰ 3.8125”
DL45RWW	⦰ 5.1250”


INSTALL CEILING BELOW FIXTURE

6

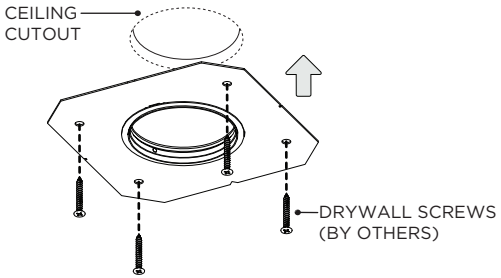


SECURE MUDDING FLANGE TO CEILING

6A

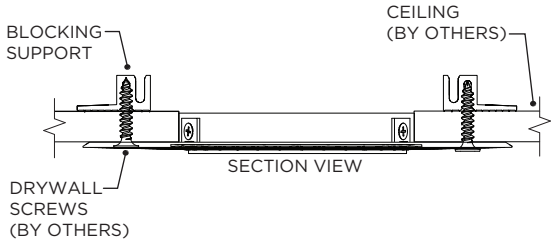


7

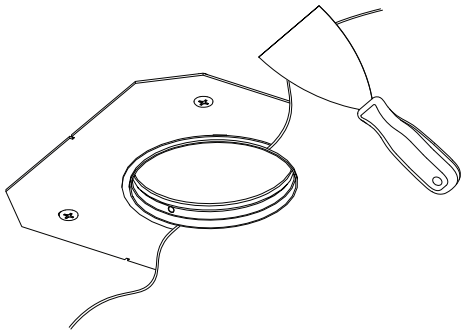


APPLY MUDDING COMPOUND (BY OTHERS) TO CEILING

8

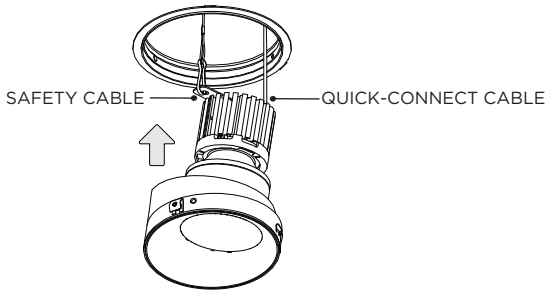

INSERT LED ASSEMBLY INTO CEILING


8A

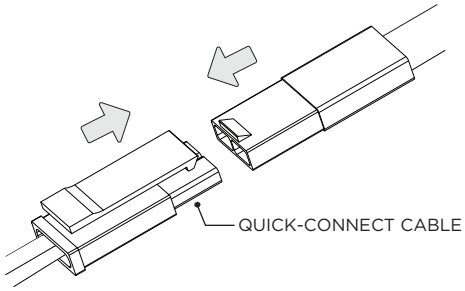


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY

NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)


1 BAR HANGER INSTALLATION
(IF SUPPLIED BY 3G)

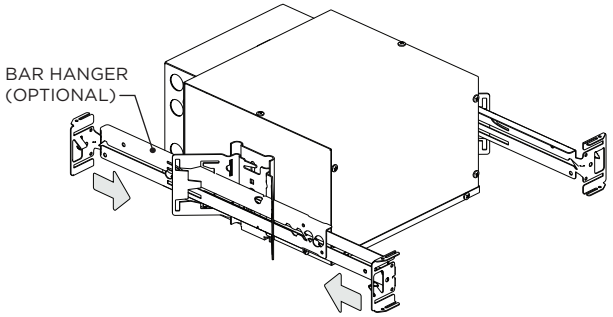

1A

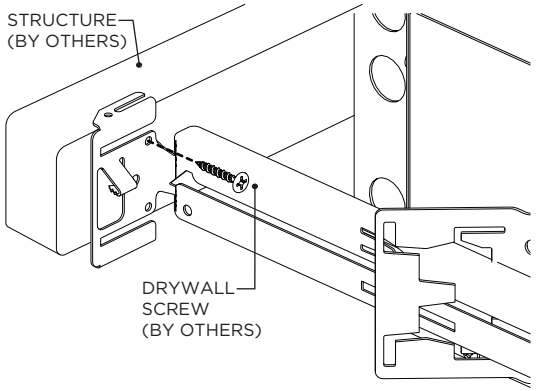


2 OTHER BAR HANGER INSTALLATION
(NOT PROVIDED BY 3G)

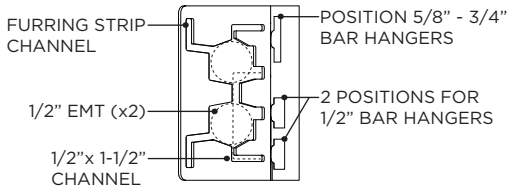


BUTTERFLY BRACKET
SIDE VIEW

3

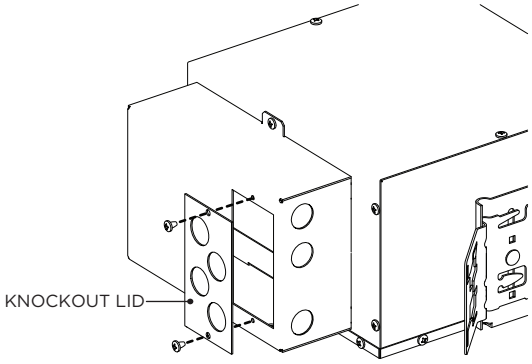

REMOVE ELECTRICAL BOX KNOCKOUT LID TO ACCESS WIRING

3A

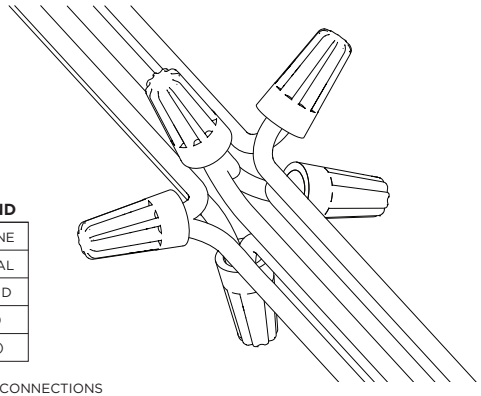


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

MAKE WIRING CONNECTIONS


4



FIXTURE TYPE	CEILING HOLE SIZE
DL33RWW	⦰ 3.8125”
DL45RWW	⦰ 5.1250”


INSTALL CEILING BELOW FIXTURE

5

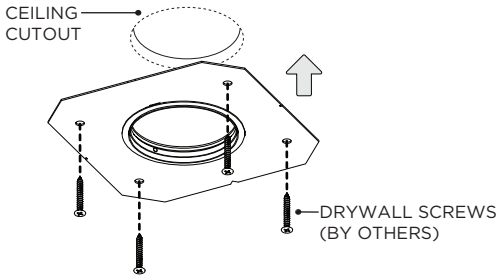


SECURE MUDDING FLANGE TO CEILING

5A

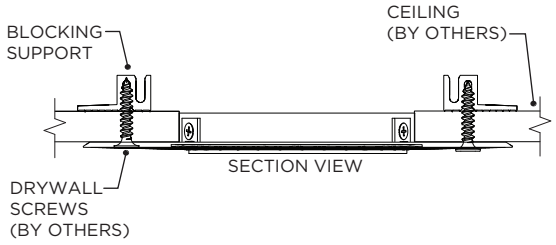


6

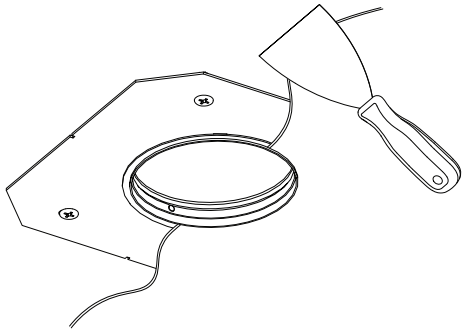


APPLY MUDDING COMPOUND (BY OTHERS) TO CEILING

7

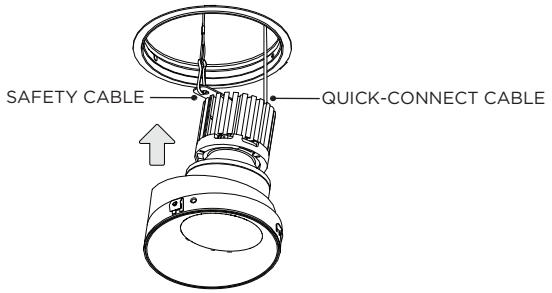

INSERT LED ASSEMBLY INTO CEILING


7A

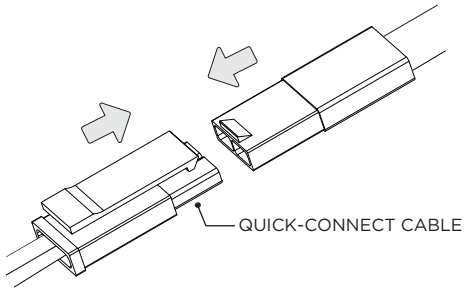

CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY


LED SERVICING

1




LIFT LENS AND DETATCH LED ASSEMBLY FROM CEILING AS SHOWN

2

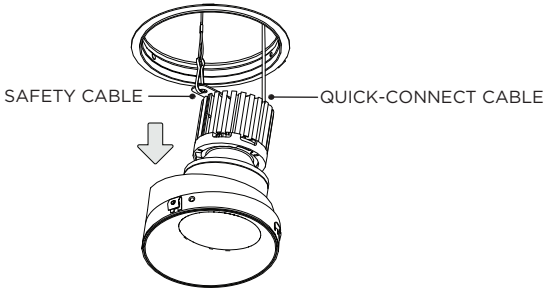


REMOVE LED ASSEMBLY FROM CEILING

2A

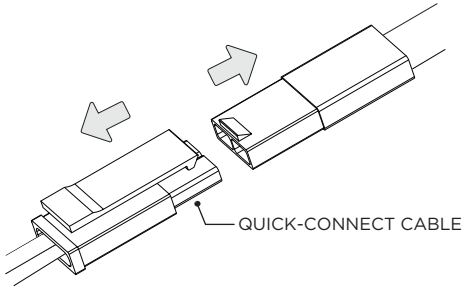


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3




DRIVER SERVICING

1 **RMD -** REMODEL

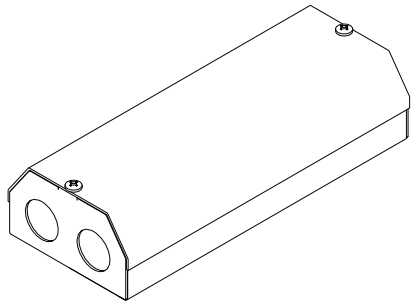


DISCONNECT POWER BEFORE SERVICING

2




LIFT LENS AND DETATCH LED ASSEMBLY FROM CEILING AS SHOWN

2A

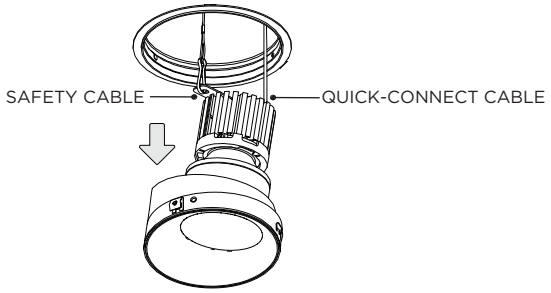


REMOVE LED ASSEMBLY FROM CEILING

2B

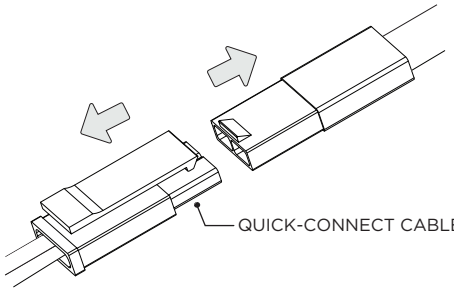


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3




4

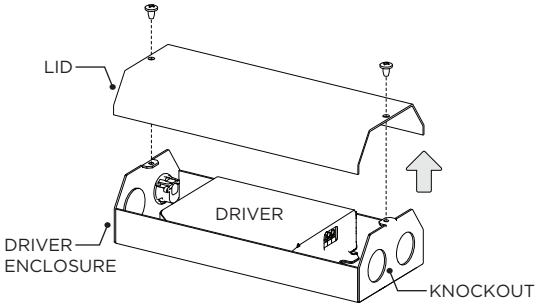


DRIVER SERVICING

1 NCF - NEW CONSTRUCTION FRAME

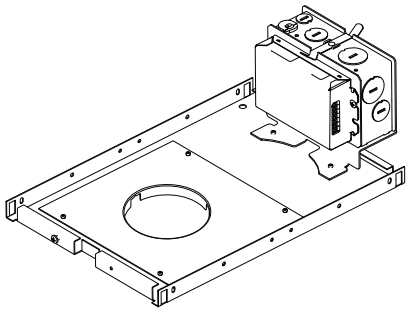


DISCONNECT POWER BEFORE SERVICING

2




LIFT LENS AND DETATCH LED ASSEMBLY FROM CEILING AS SHOWN

2A

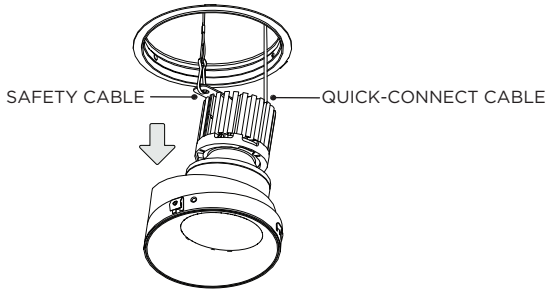


REMOVE LED ASSEMBLY FROM CEILING

2B

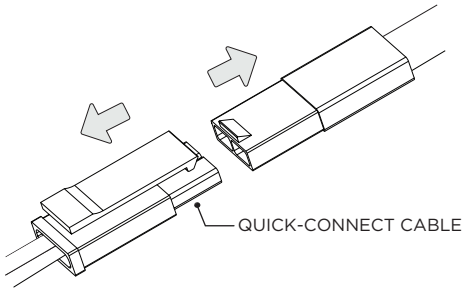


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY


3

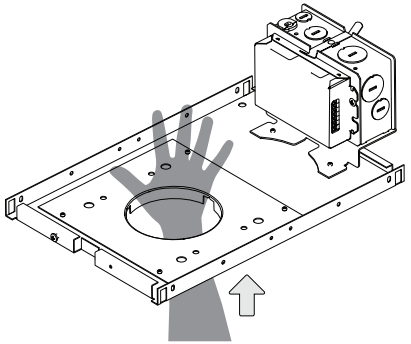


4

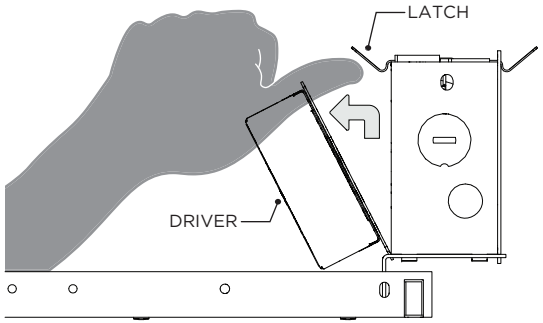

5

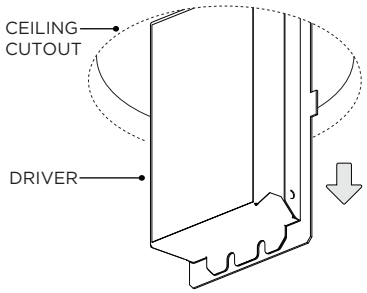


6

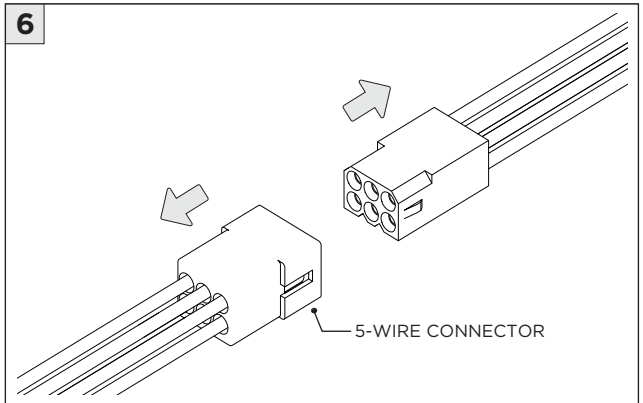

DISCONNECT 5-WIRE CONNECTOR


7 NCF - NEW CONSTRUCTION FRAME FOR INTEGRATED BATTERY ONLY

THIS UNIT UTILIZES MORE THAN ONE POWER SOURCE
DISCONNECT ALL POWER SOURCES BEFORE SERVICING

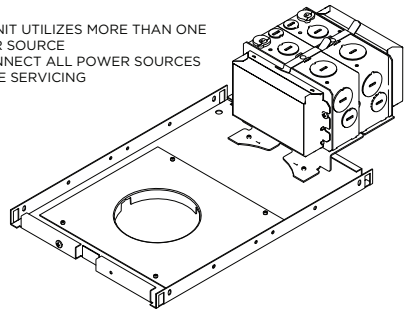

ACCESS ABOVE CEILING REQUIRED FOR DRIVER SERVICING


8

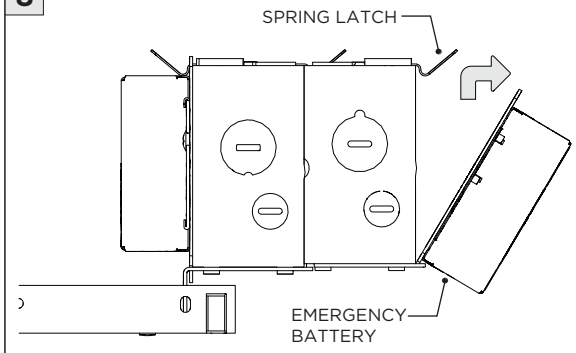

REMOVE BATTERY BOX COVER TO ACCESS WIRING


DRIVER SERVICING

1 **SH -** SHALLOW HOUSING

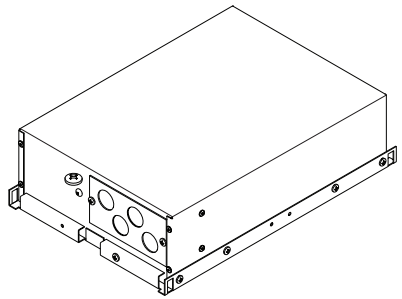


DISCONNECT POWER BEFORE SERVICING

2




LIFT LENS AND DETATCH LED ASSEMBLY FROM CEILING AS SHOWN

2A

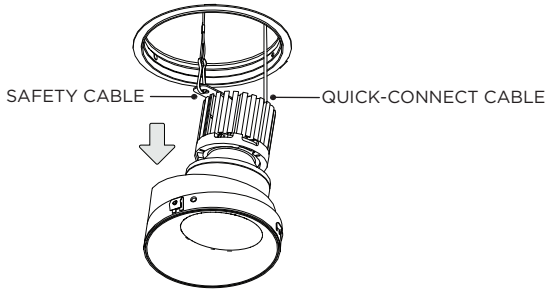


REMOVE LED ASSEMBLY FROM CEILING

2B

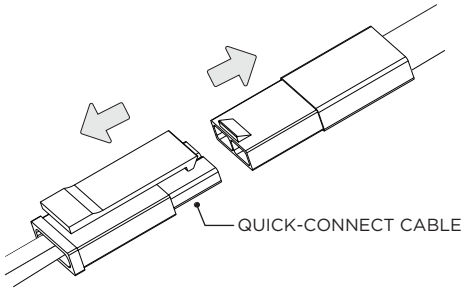


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

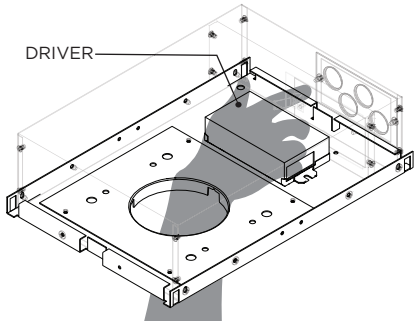


REMOVE DRIVER - SECURED WITH HOOK-AND-LOOP FASTENER

4

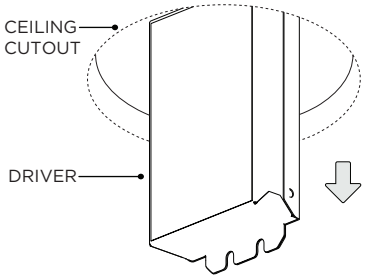


5

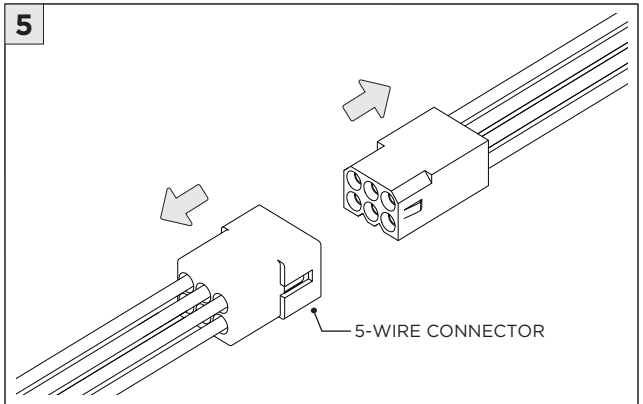

DISCONNECT 5-WIRE CONNECTOR


DRIVER SERVICING

1 NC/IC - NEW CONSTRUCTION HOUSING

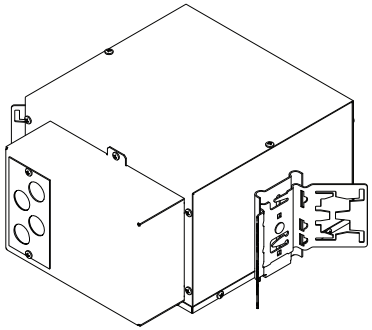


DISCONNECT POWER BEFORE SERVICING

2




LIFT LENS AND DETATCH LED ASSEMBLY FROM CEILING AS SHOWN

2A

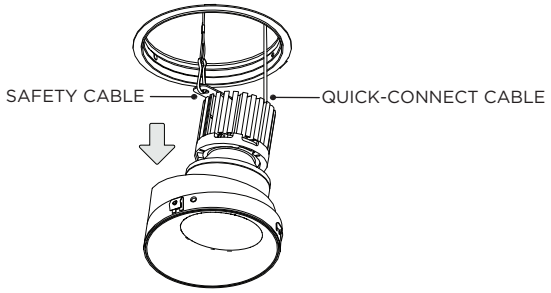


REMOVE LED ASSEMBLY FROM CEILING

2B

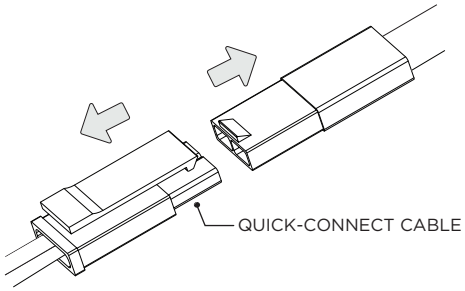


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY


3

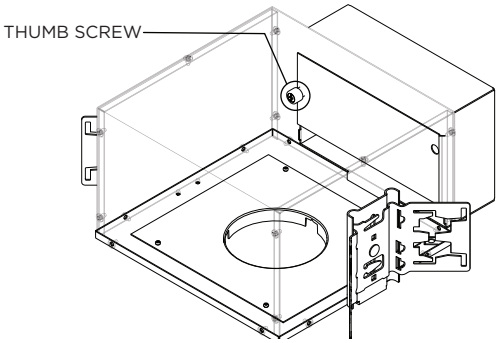


4

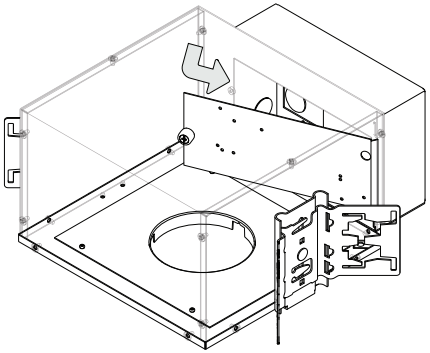

5

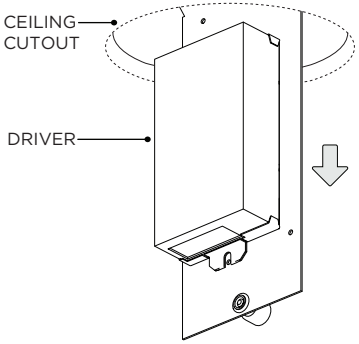

6

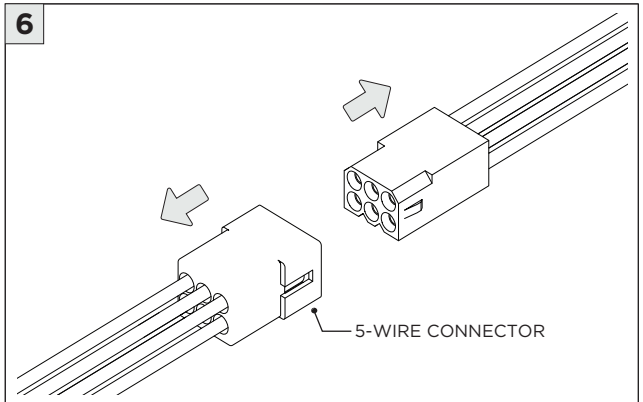

DISCONNECT 5-WIRE CONNECTOR