



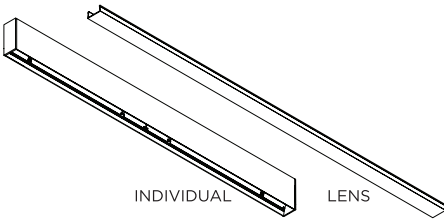


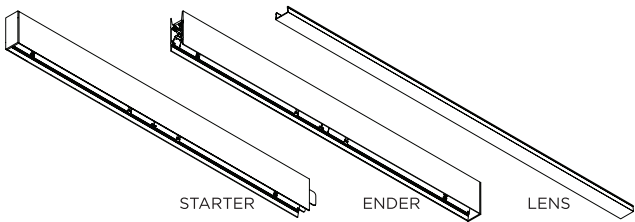

3G-2SLI and 3G-4SLI
2", and 3.5" SURFACE LINIA

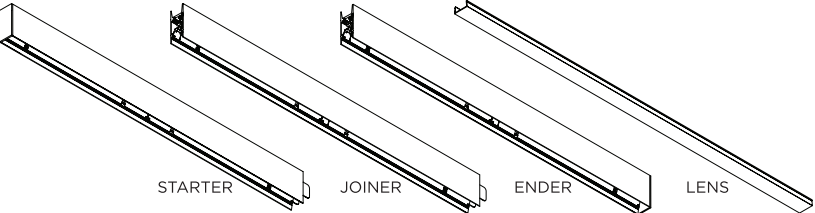

 **FOR NEW CONSTRUCTION INSTALLATION ONLY**

FIXTURE TYPES		INCLUDED COMPONENTS	
2SLI PROFILE  4SLI PROFILE 		Standalone Fixtures (2' to 8')  INDIVIDUAL LENS	Continuous Runs (9' to 16')  STARTER ENDER LENS
Continuous Runs (17' and longer)  STARTER JOINER ENDER LENS			

INSTRUCTION KEY	INFORMATION
 ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS TURN OFF POWER DURING INSTALLATION OR SERVICING
 ATTENTION	
 POWER ON	
 POWER OFF	

1 FLUSH LENS REMOVAL

TERMINAL
SCREWDRIVER
(BY OTHERS)

LENS

2 FLUSH LENS REMOVAL

LENS

3

REFLECTOR CLIP

FLATHEAD SCREWDRIVER
(BY OTHERS)

FOR RGBW REFLECTOR REMOVAL - SEE PAGE 3

4

REFLECTOR

FIXTURE ID &
CERTIFICATION LABEL

3G
LIGHTING

Date: 08/24

Section: 01 OF 1

5

1/4-20 THREADED ROD LOCATION
AT 5.00" FROM EACH END OF NOMINAL
LENGTH

2.75" POWER FEED ENTRY

HOLES FOR THREADED ROD

THREADED ROD LOCATION

3'	26"	6'	62"
4'	38"	7'	74"
5'	50"	8'	86"

6 DRYWALL MOUNTING DETAIL

CEILING
(BY OTHERS)


THREADED ROD
(BY OTHERS)

FIXTURE HOUSING

7

LABEL EXAMPLE

FIXTURE TYPE: L1
SECTION: 01 OF 4
TOTAL SECTIONS: 4

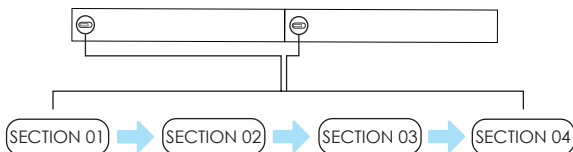

IDENTIFY AND ARRANGE FIXTURES BY THEIR ID LABEL ON
THE SIDE OF THE EXTRUSION BEFORE INSTALLATION

8

CONDUIT POWER FEED
& CONNECTOR
(BY OTHERS)

CONNECT CONDUIT POWER FEED (BY OTHERS) TO THE TOP OF STARTER SECTION

8A










WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM+)
PURPLE	(DIM-)

RGBW WIRING LEGEND


GREEN	GROUND
BLACK	LINE
WHITE	NEUTRAL
GREEN	DMX SHIELD
ORANGE	DMX -
PURPLE	DMX +

MAKE WIRING CONNECTIONS INSIDE OF FIXTURE

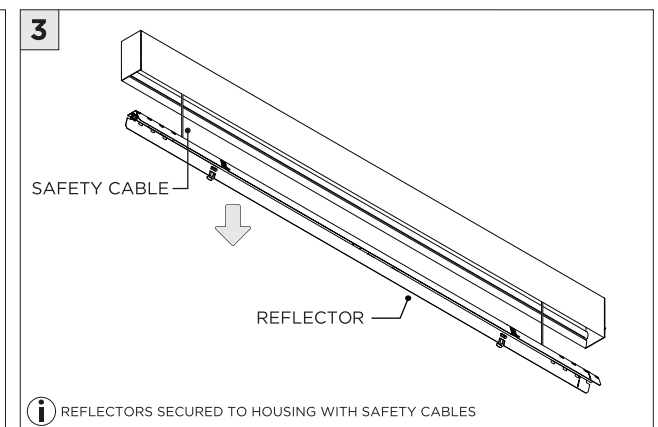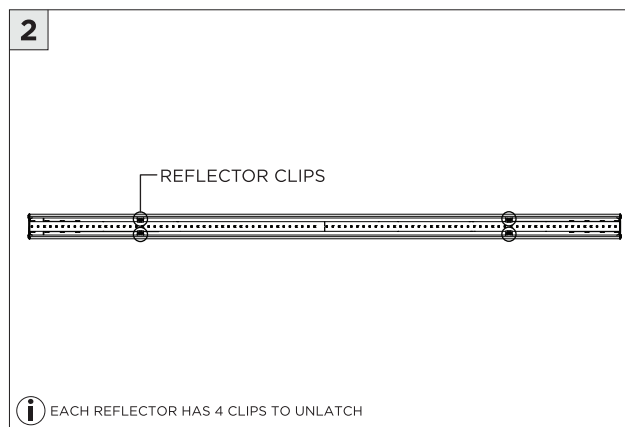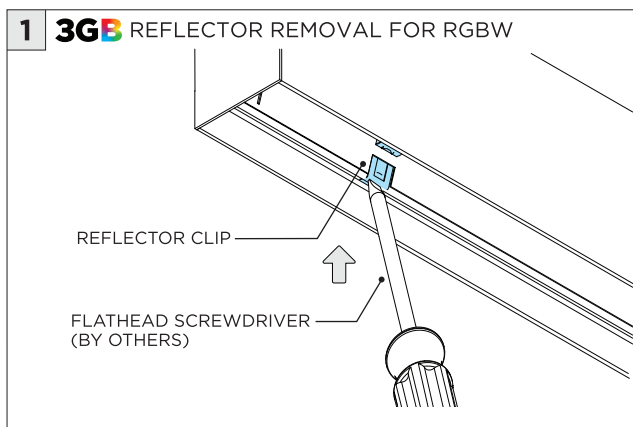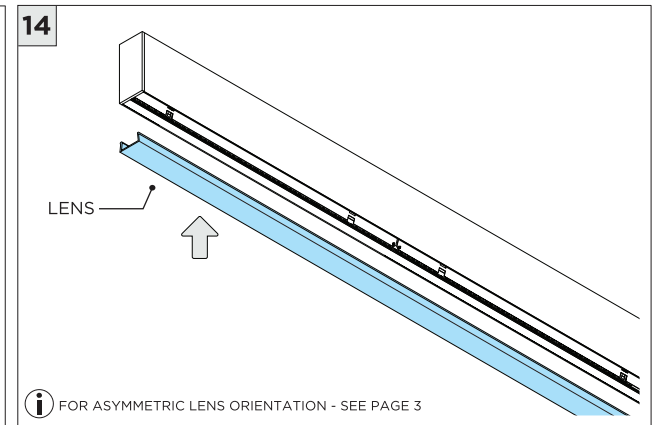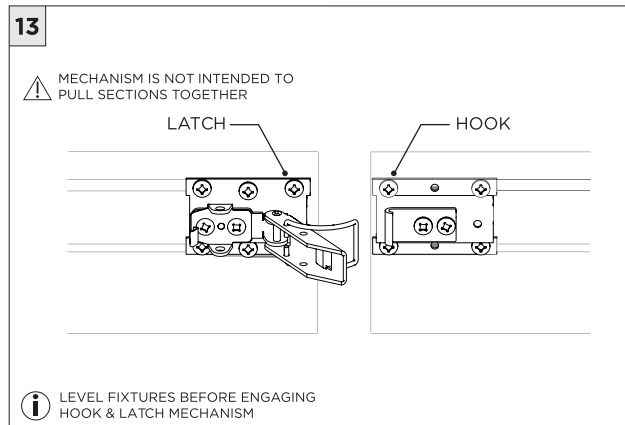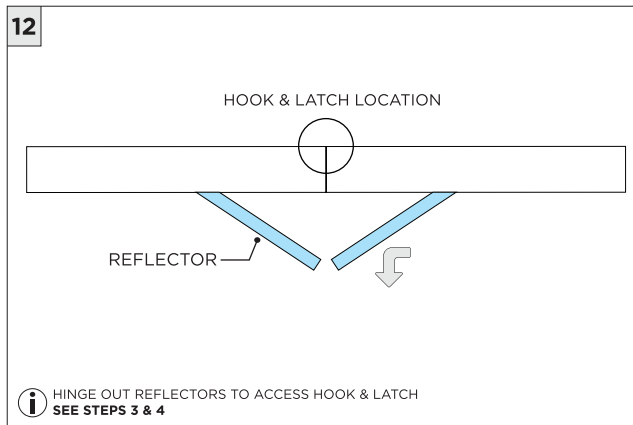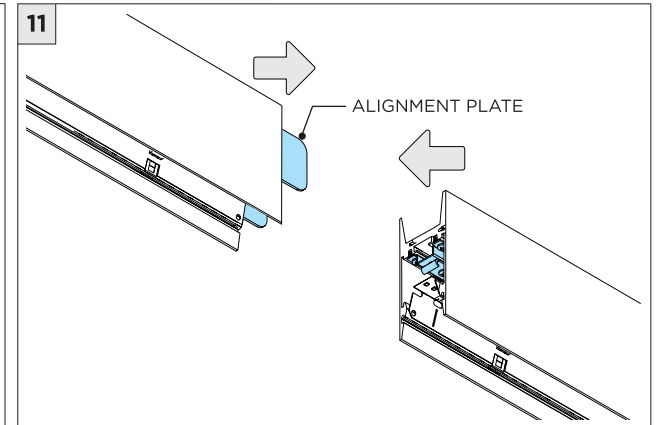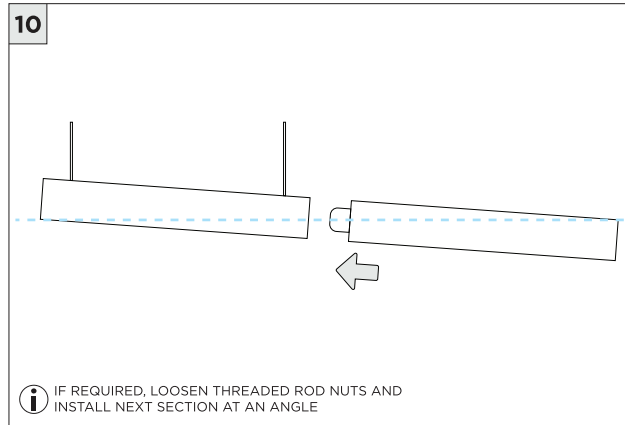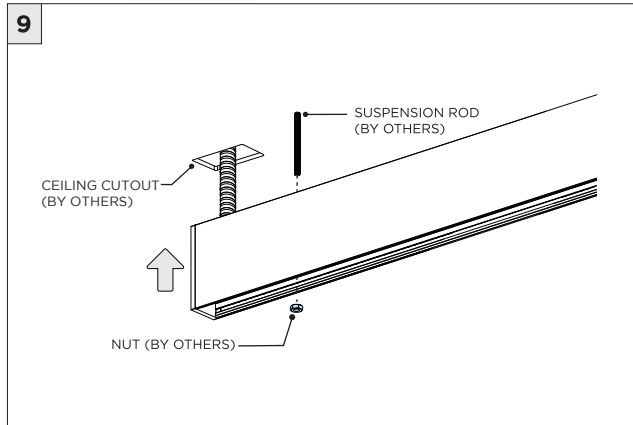


DRIVER SERVICING


1 FLUSH LENS REMOVAL

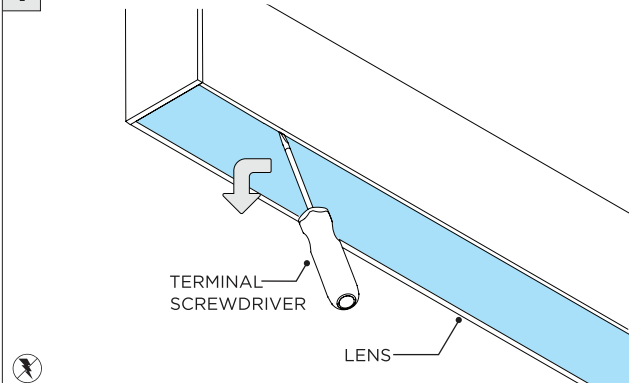


2

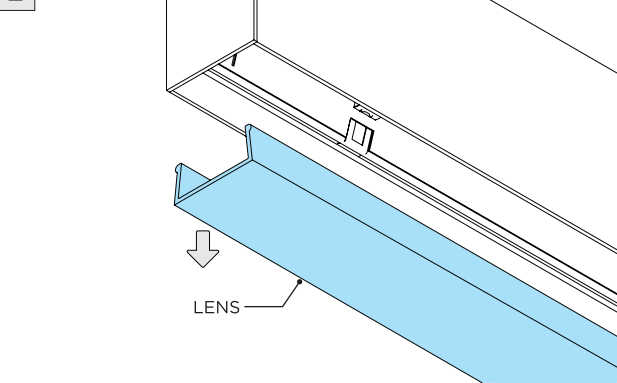

2A DROP LENS REMOVAL

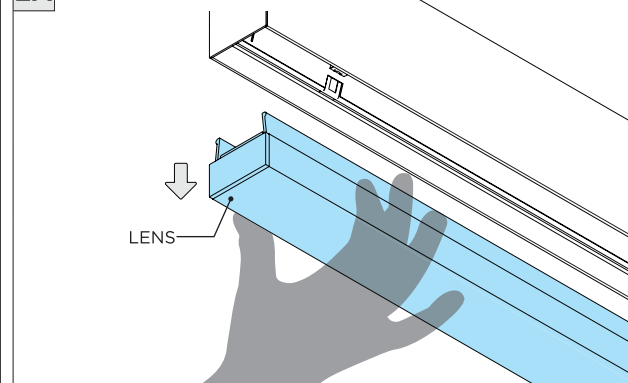


3

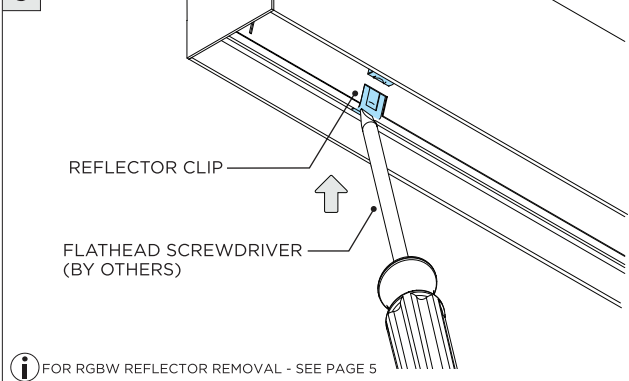


i FOR RGBW REFLECTOR REMOVAL - SEE PAGE 5

4

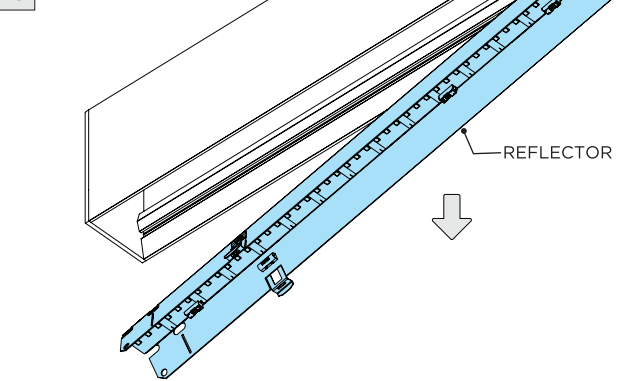


5

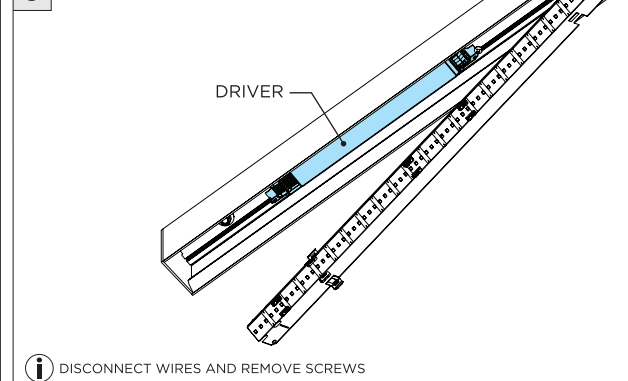


i DISCONNECT WIRES AND REMOVE SCREWS


6

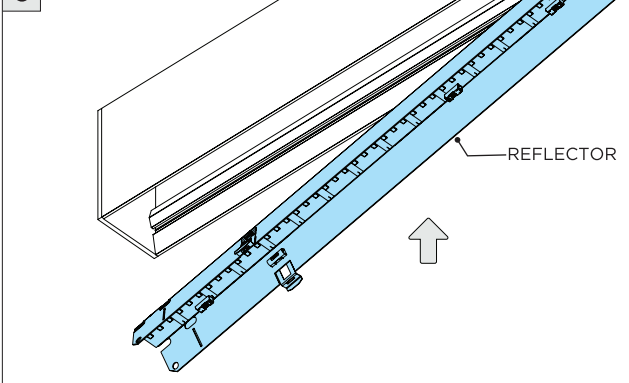

7

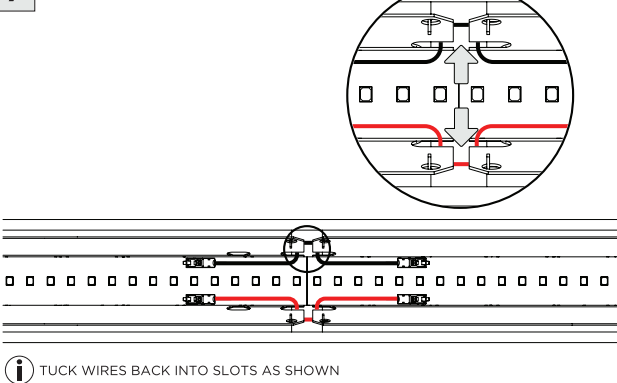


8

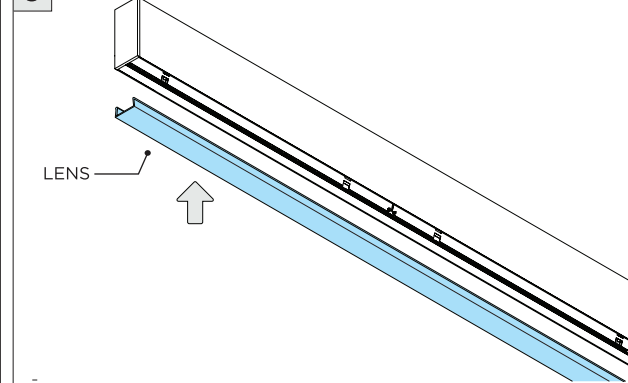


DRIVER SERVICING

1 3GB REFLECTOR REMOVAL FOR RGBW

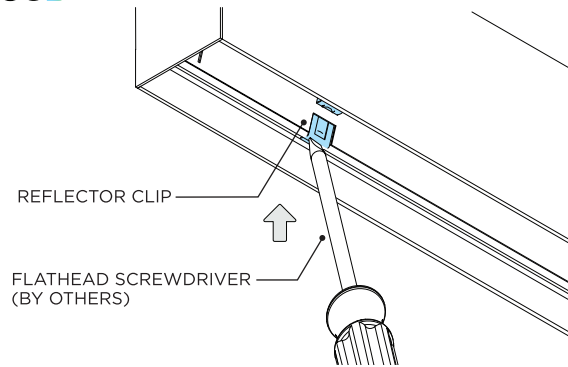


2



i EACH REFLECTOR HAS 4 CLIPS TO UNLATCH


3

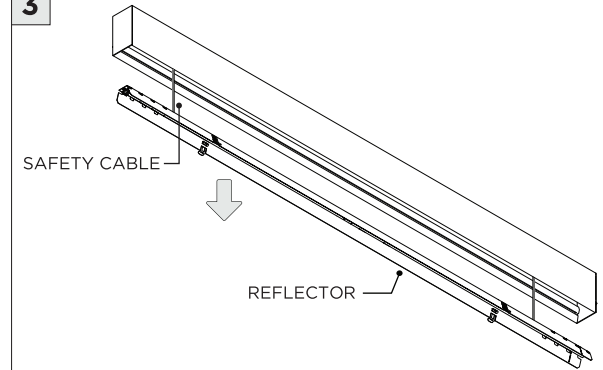


i REFLECTORS SECURED TO HOUSING WITH SAFETY CABLES

LED SERVICING


1 FLUSH LENS REMOVAL

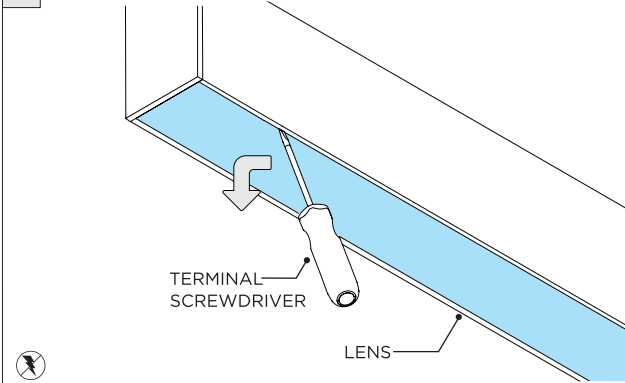


2

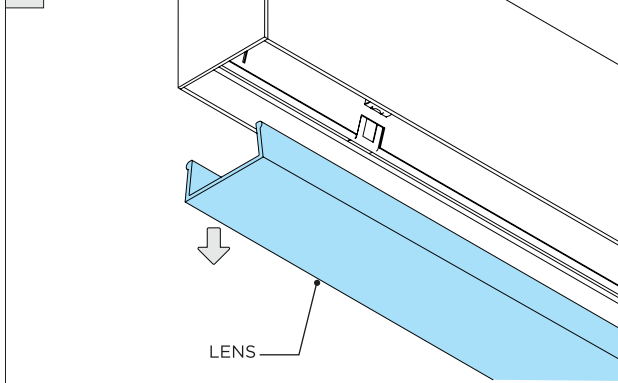


2A DROP LENS REMOVAL

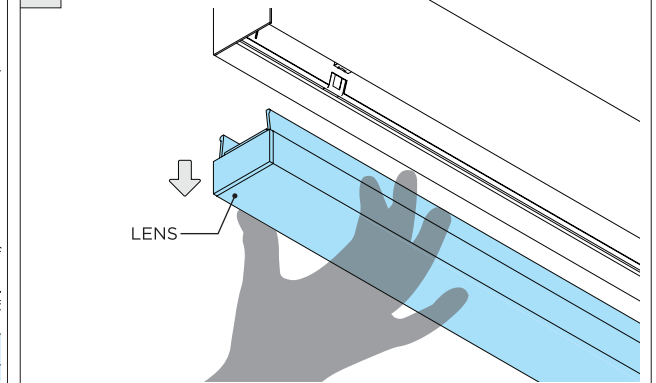

3

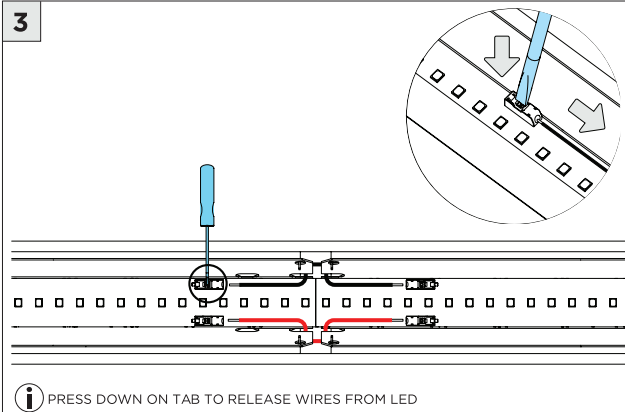


4

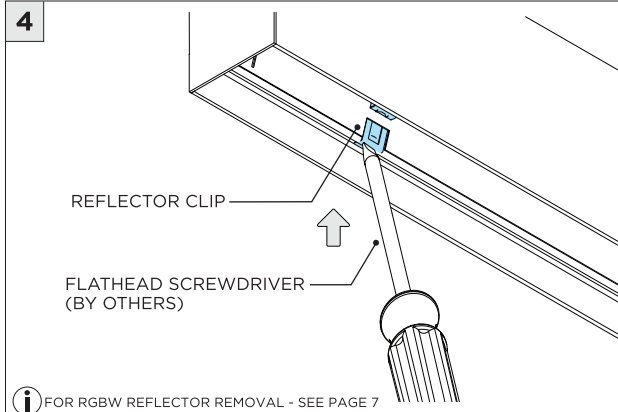


FOR RGBW REFLECTOR REMOVAL - SEE PAGE 7


5

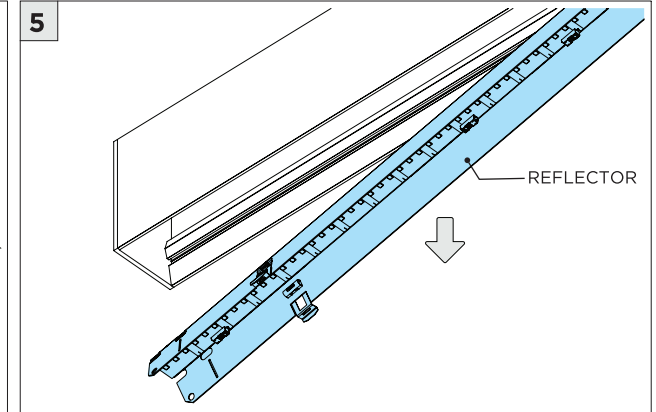

6

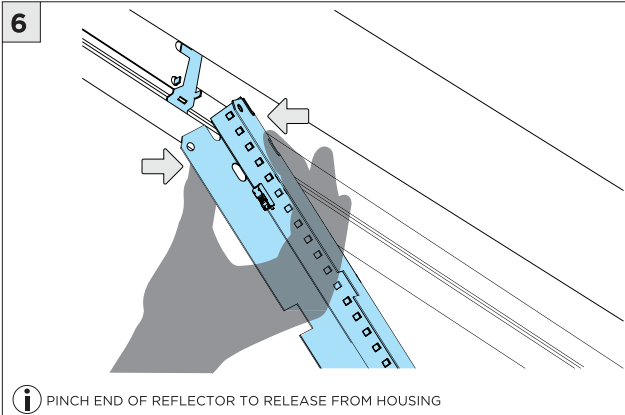


7

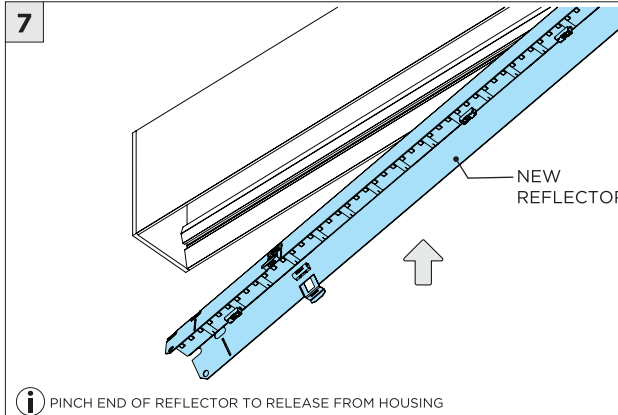

PINCH END OF REFLECTOR TO RELEASE FROM HOUSING

8

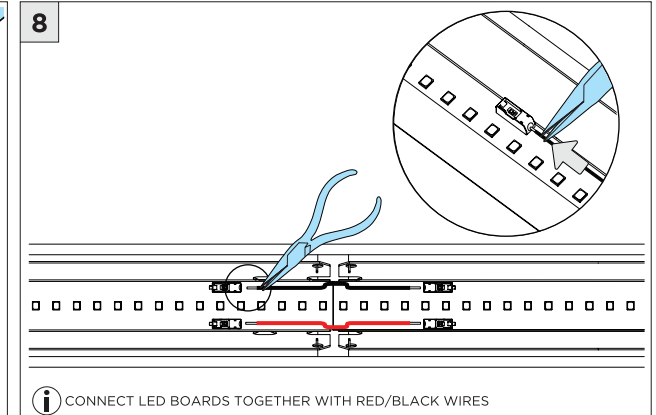

LED SERVICING

