
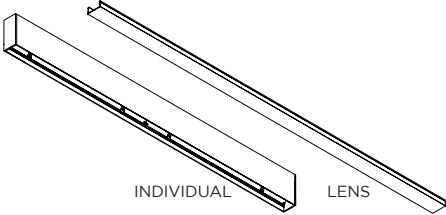
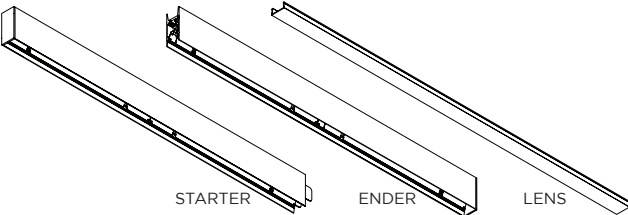
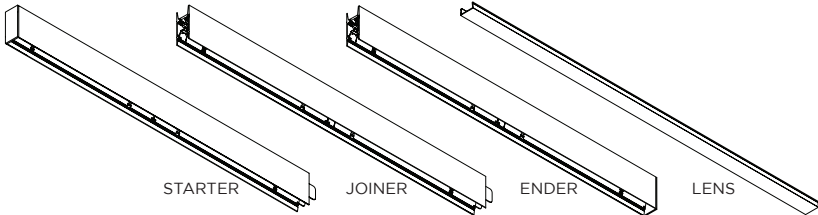




3G-1SLI
1.5" SURFACE LINIA
GRID CEILING




⚠ FOR NEW CONSTRUCTION INSTALLATION ONLY


FIXTURE TYPES	INCLUDED COMPONENTS	
<p>1SLI PROFILE</p> 	<p>Standalone Fixtures (2' to 8')</p>  <p>INDIVIDUAL LENS</p>	<p>Continuous Runs (9' to 16')</p>  <p>STARTER ENDER LENS</p>
	<p>Continuous Runs (17' and longer)</p>  <p>STARTER JOINER ENDER LENS</p>	

INSTRUCTION KEY	INFORMATION
ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
ATTENTION	REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
POWER ON	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
POWER OFF	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING


1 FLUSH LENS REMOVAL

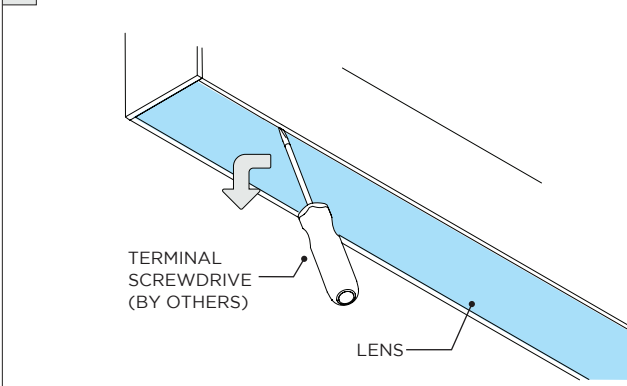


2 FLUSH LENS REMOVAL

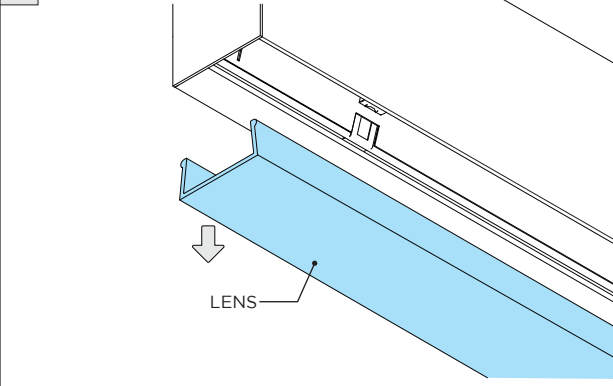


3

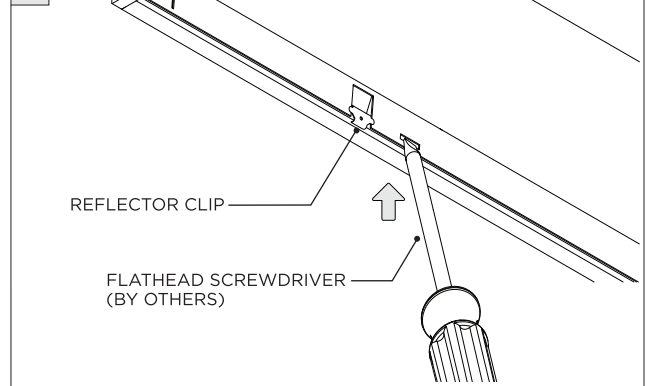


4

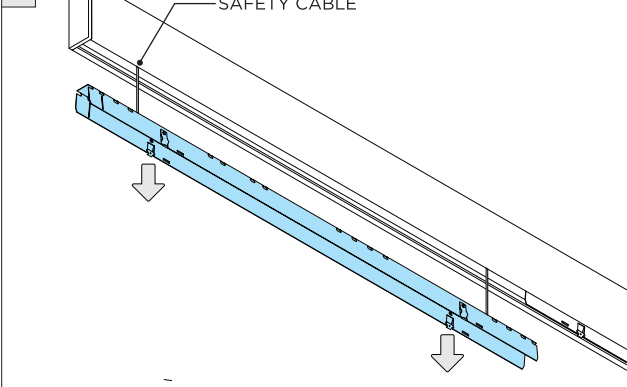


5

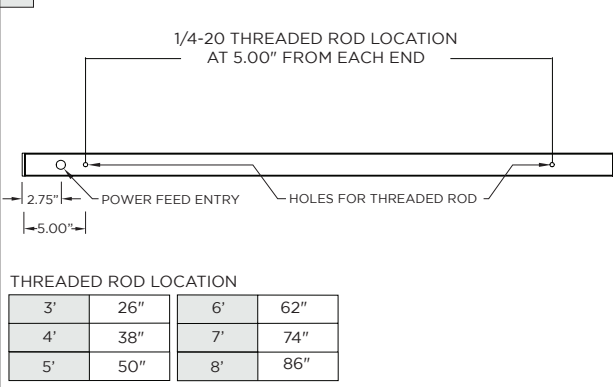


6

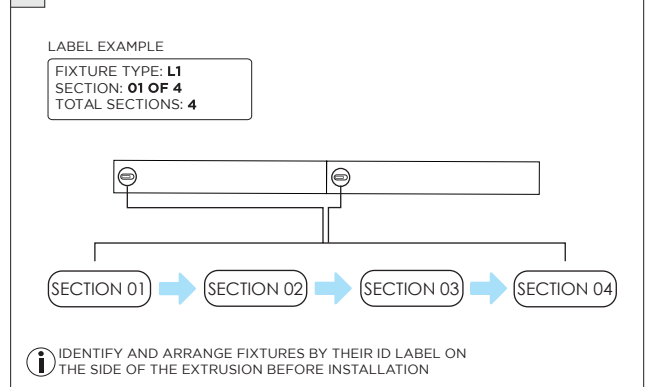


7 GRID CEILING MOUNT









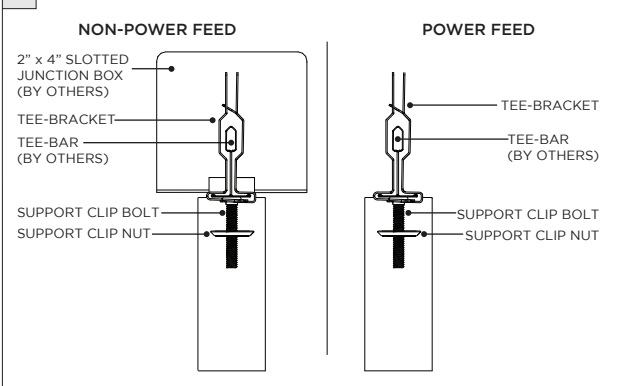


8

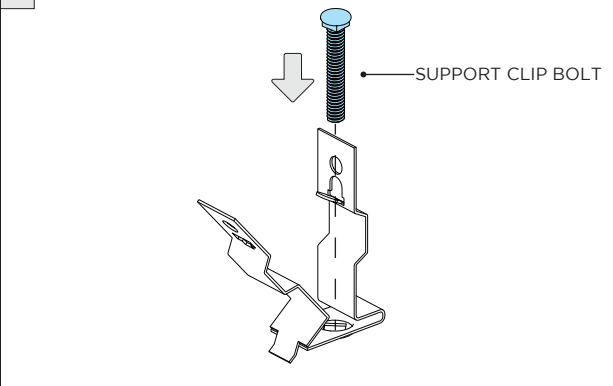


9

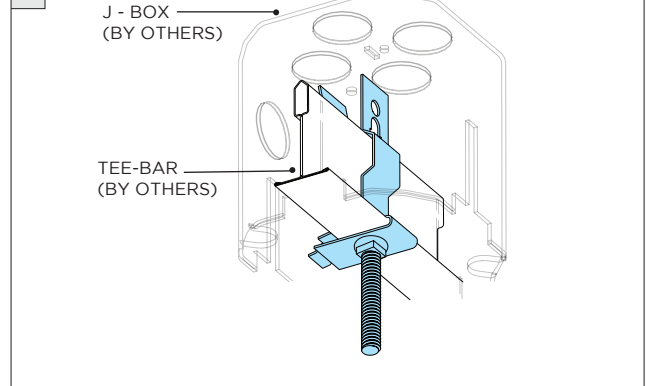


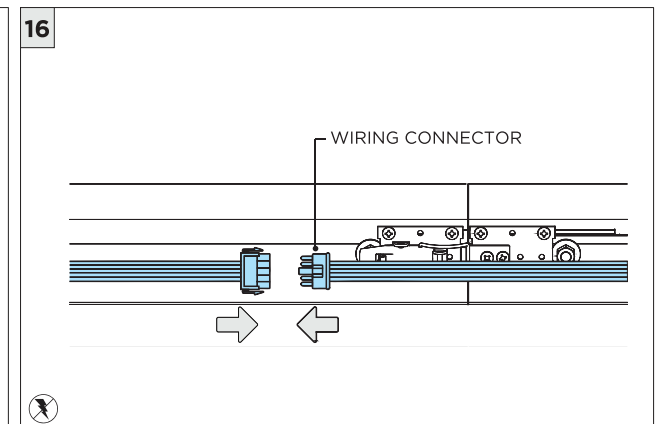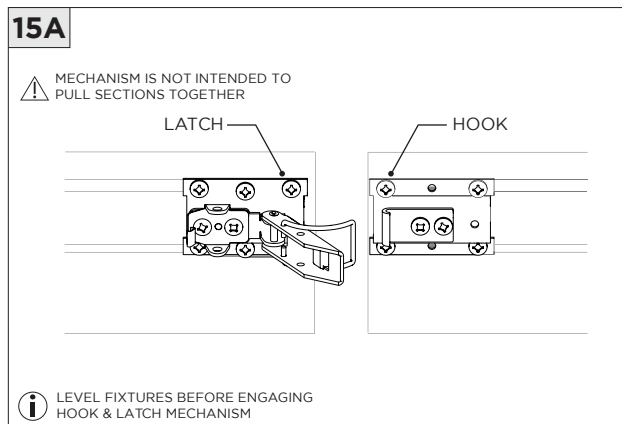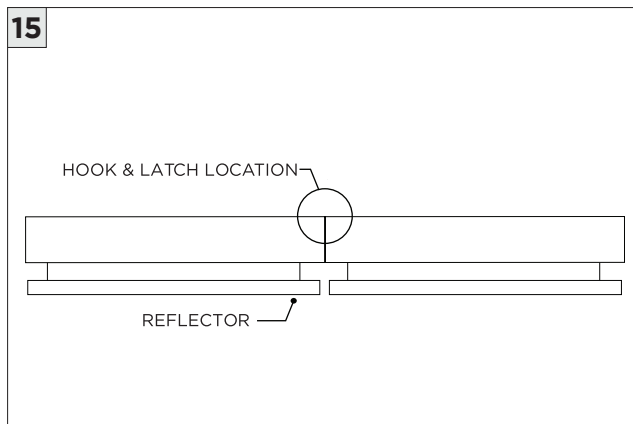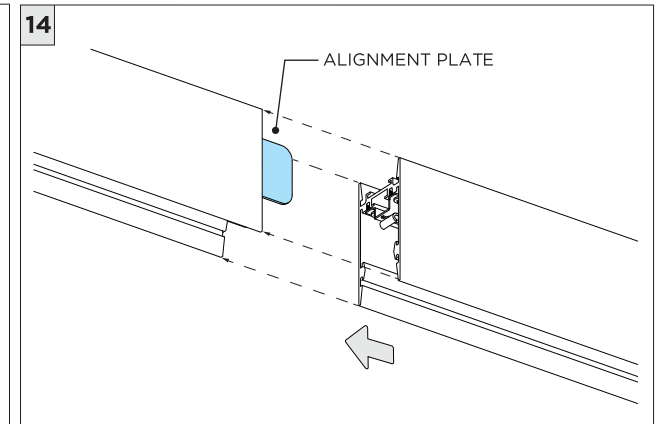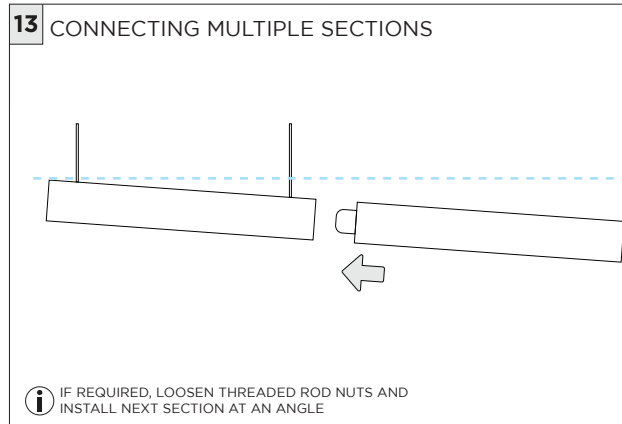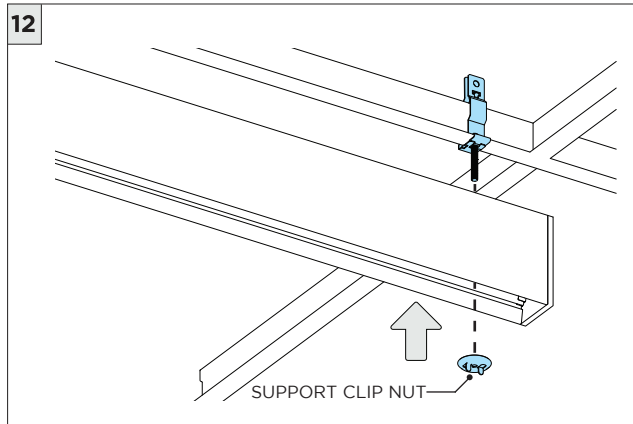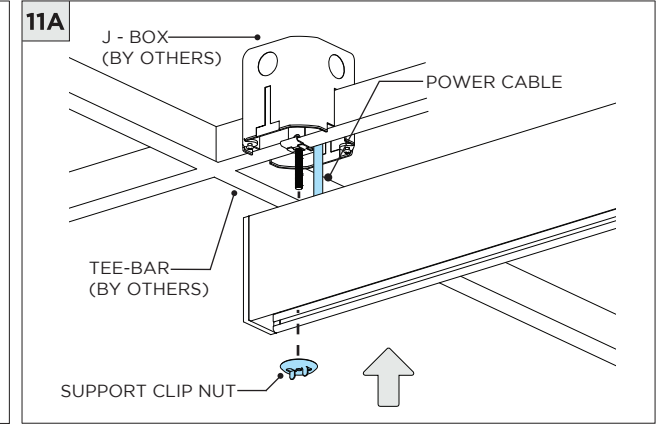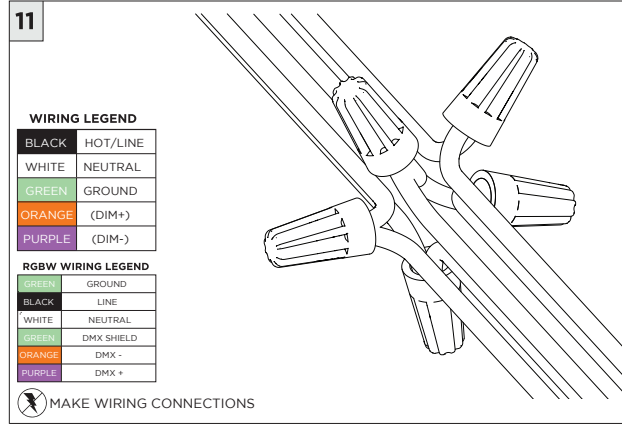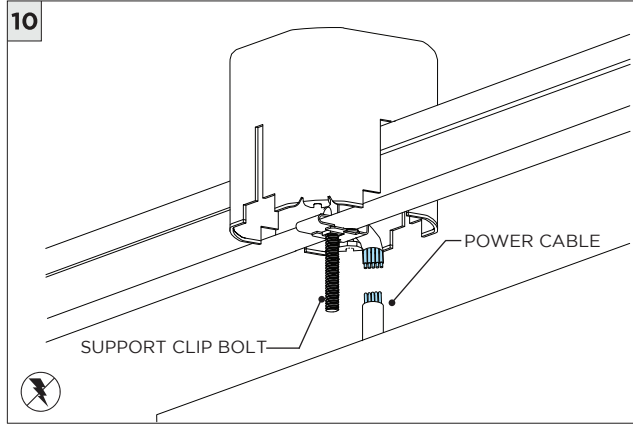


17

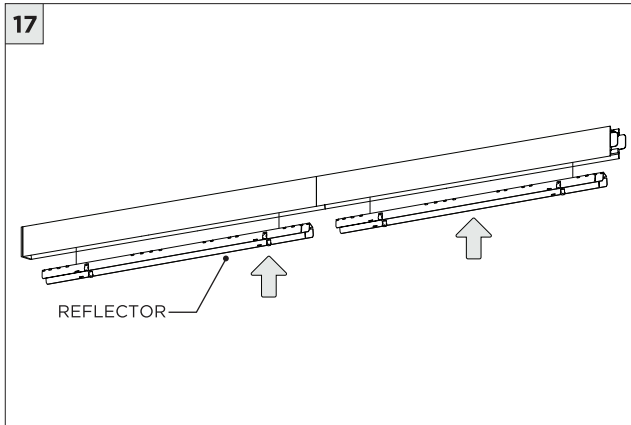








18

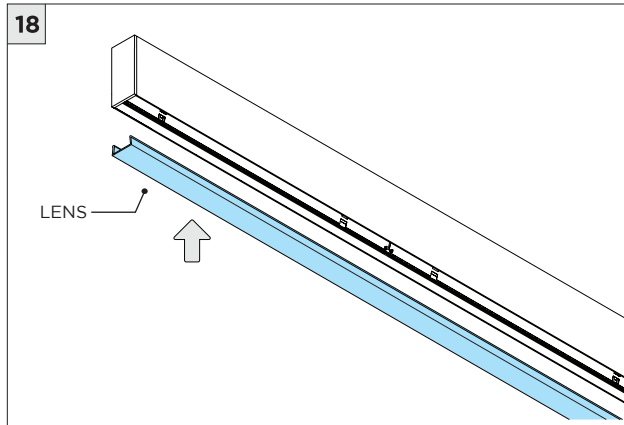

18A ASYMMETRIC LENS

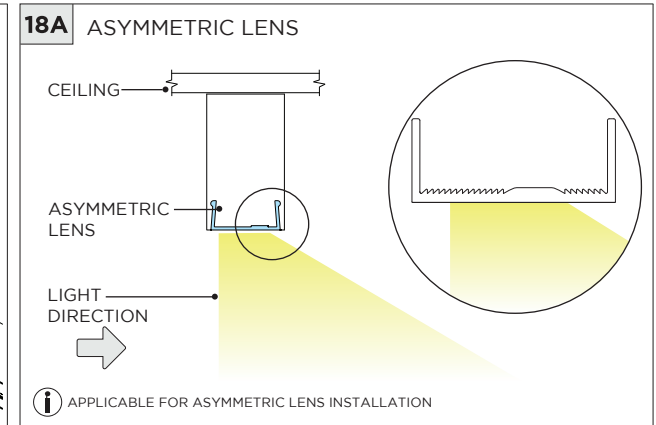

DRIVER SERVICING

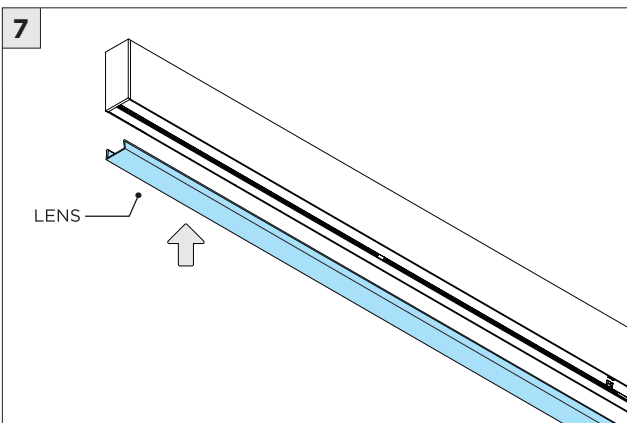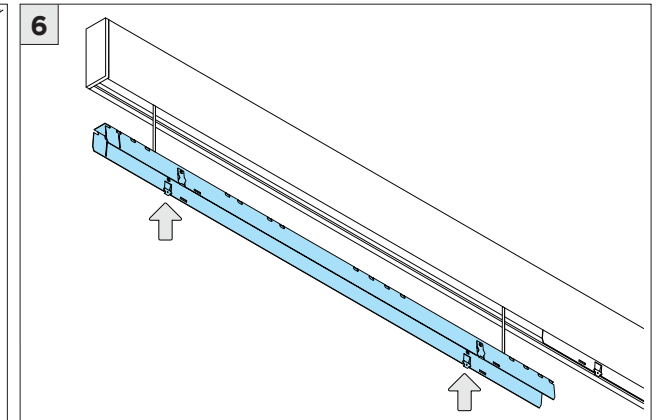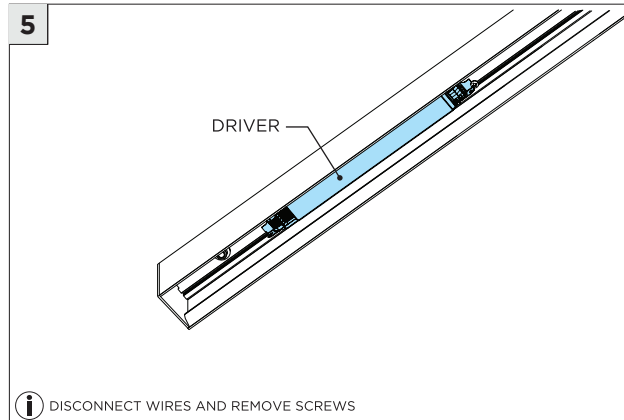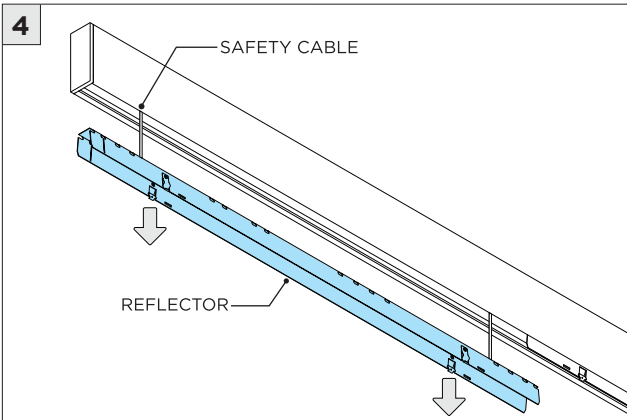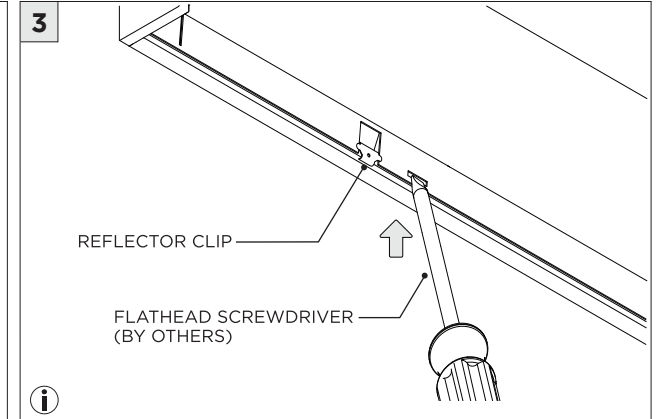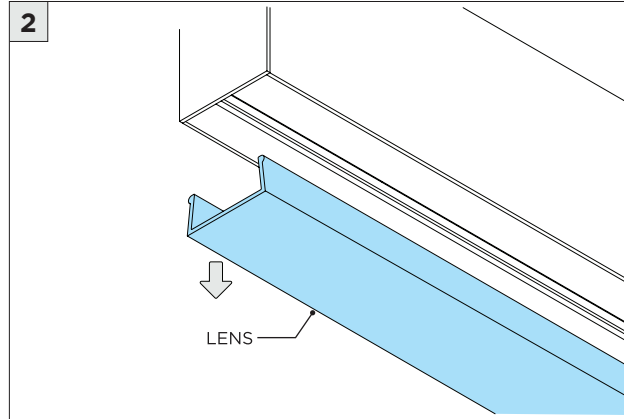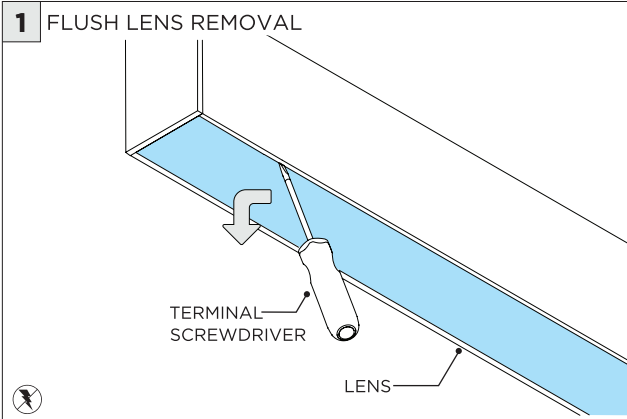

LED SERVICING - DIRECT

