



3G-1WLI-DI

1.5" LINEAR
DIRECT/INDIRECT
WALL MOUNTED



Narrow 1.5" aperture with one piece extruded aluminum housing
Individual or continuous runs available in multiple run configurations
Direct/Indirect distribution with multiple lumen output options
LED system with performance up to 138 lumens per watt
Delivered lumen range up to 2040 lumens per foot
Extruded acrylic lens with optimal performance and glare control
Asymmetric optic available
1% dimming standard with several driver options

PROJECT:		TYPE:	
CATALOG#:		DATE:	QTY:

CAT. NO	LUMEN OUTPUT (DIRECT)	LUMEN OUTPUT (INDIRECT)	CRI
3G-1WLI-DI	D250 - 250 LM/FT D500 - 500 LM/FT D750 - 750 LM/FT D1000 - 1000 LM/FT ¹ DC___ - CUSTOM OUTPUT (SPECIFY LM/FT) * <small>*Specify custom lumen outputs in 50lm increments (ie: DC600, DC650, DC700) Custom output cannot exceed D1000</small>	L250 - 250 LM/FT L500 - 500 LM/FT L750 - 750 LM/FT ² L1000 - 1000 LM/FT ² LC___ - CUSTOM OUTPUT (SPECIFY LM/FT) * <small>*Specify custom lumen outputs in 50lm increments (ie: LC600, LC650, LC700) Custom output cannot exceed L1000</small>	S80 - 80+ CRI ³ H90 - 90+ CRI


COLOR TEMP	VOLTAGE	DRIVER	LENS OPTION (DIRECT)	LENS OPTION (INDIRECT)
27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	UNV - 120/277V 347 - 347V ⁴	DIM - 0-10V (100-1%) D01 - 0-10V (100-0.1%) DALI - DALI (100-1%) ⁵ DHL2 - LUTRON HI-LUME (1% ECOSYSTEM) DMX - DMX (100-0%)	FL - FLUSH LENS DASY - ASYMMETRIC LENS	FL - FLUSH LENS ASY - ASYMMETRIC LENS


FINISH	CIRCUITING	OPTIONS	RUN TYPE
WH - WHITE BK - BLACK SV - SILVER <small>All mounting canopies provided in white as standard</small>	1C - SINGLE CIRCUIT 2C - DUAL CIRCUIT (SEPARATE DIRECT & INDIRECT)	EMB - EMERGENCY * BATTERY (INTEGRAL) EMC - EMERGENCY CIRCUIT <small>*Minimum 4' section</small>	S - ____' (STRAIGHT) * L - ____'X ____' (L-SHAPE) U - ____'X ____'X ____' (U-SHAPE) <small>*Individual units available from 4' to 8' Continuous runs available in 1" increments as standard</small>

- ¹ D1000 and L1000 (1000LM/FT) not available with H90 (90+ CRI)
² L750 (750LM/FT) and L1000 (1000LM/FT) not available with ASY (indirect asymmetric option)
³ S80 (80+ CRI) not available with 27K
⁴ 347 available in "DIM" 0-10V only (100-1%)
⁵ DALI-2 (Type 6) provided as standard. Please consult factory for DALI (Type 8) options


DELIVERED LUMENS PER FOOT BASED ON 80+ CRI 3500K LED SOURCE


DIRECT LENS OPTION

FLUSH	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
	250	2.3	107
	500	4.7	107
	750	7.0	108
	1000	9.6	104

ASYMMETRIC	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
	250	2.2	112
	500	4.5	112
	750	6.5	115
	1000	9.0	111

INDIRECT LENS OPTION

FLUSH	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
	250	1.6	155
	500	3.2	155
	750	4.9	155
	1000	6.6	152

ASYMMETRIC	DELIVERED LUMENS	SYSTEM WATTS	EFFICACY (LPW)
	250	1.6	160
	500	3.1	160
	750	4.7	160
	1000	6.3	159

LUMEN OUTPUT MULTIPLIERS

COLOR TEMP	80+ CRI	90+ CRI
2700K	N/A	0.78
3000K	0.97	0.83
3500K	1.00	1.00
4000K	1.02	1.02

HOUSING

Extruded aluminum housing with narrow 1.5" aperture
Die cast aluminum end caps add 1/4" to each end of luminaire
Individual units and continuous runs available in 1" increments as standard
24-gauge LED reflector with high reflectance white powder coated finish
Standard polyester powder coated matte white finish. Optional finishes available

OPTICS

Extruded, satin acrylic lens designed for optimal performance and glare control. Up to 8' continuous
High performance asymmetric optics available

LISTING

ETL listed and conforms to UL1598 standard. Certified to CSA22.2 NO.250.0. Rated for indoor dry or damp locations

WARRANTY

5 Year Warranty on LED and drivers
Manufacturer 1 Year Warranty for defects in material and workmanship under normal use
Ambient temperature at fixture should not exceed 25°C

ELECTRICAL



Standard 0-10V, constant current drivers with 100-1% dimming range and >0.9 power factor
Standard 120/277V universal voltage with several driver options
Luminaires are pre-wired with factory installed quick connects and branch circuit wiring
All drivers are integral and easily accessible through luminaire aperture
Minimum 4' and maximum 6' length for each integral emergency battery. 10W output for 90 minutes

LED SYSTEM

Proprietary LED system with color consistency <3 SDCM
Available in 27K, 30K, 35K, and 40K
Standard 80+CRI. Optional 90+CRI
R9 value of 56 for 90+CRI
L90 >60,000 hours
5 Year Warranty

MOUNTING


Toolless installation with 3G's proprietary mounting system
Internal, toolless joiner system (latch and hook) easily connects multiple sections together
LED reflectors remain within each fixture section during installation with 3G's click and lock spring system
Suitable for wall mount applications (2"x4" junction box)
Fixture is secured to mounting brackets that fasten directly to wall
Suitable for various architectural ceilings (see mounting details)
Fixture weight: +/- 2.5 lb/ft

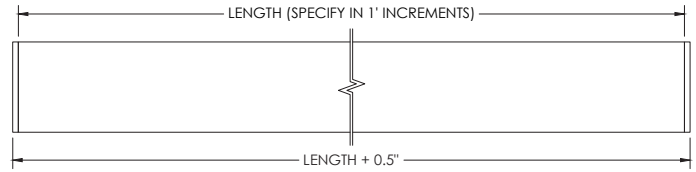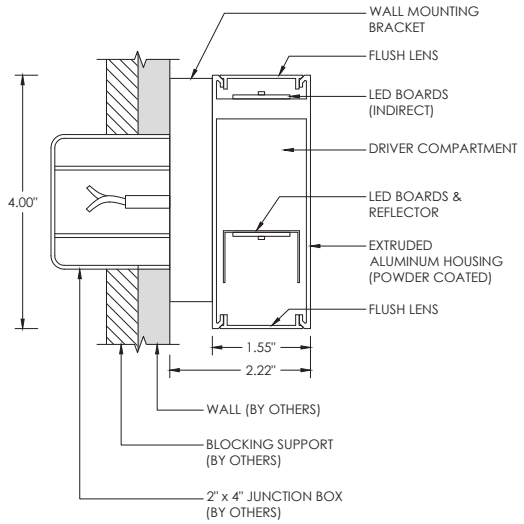


LENS OPTION

DIRECT LENS OPTION

FL - FLUSH




DASY - ASYMMETRIC




INDIRECT LENS OPTION

FL - FLUSH






ASY - ASYMMETRIC




PATTERNS

Specify pattern shape and overall dimensions as shown below
Patterns are connected with fully illuminated 12"x12" L-shaped sections
Please consult factory for custom patterns and shapes not shown below



L-SHAPE	U-SHAPE
Provide dimensions of AxB Example: L - 6'x8'	Provide dimensions of AxBxC Example: U - 8'x10'x6"
	

MOUNTING DETAILS

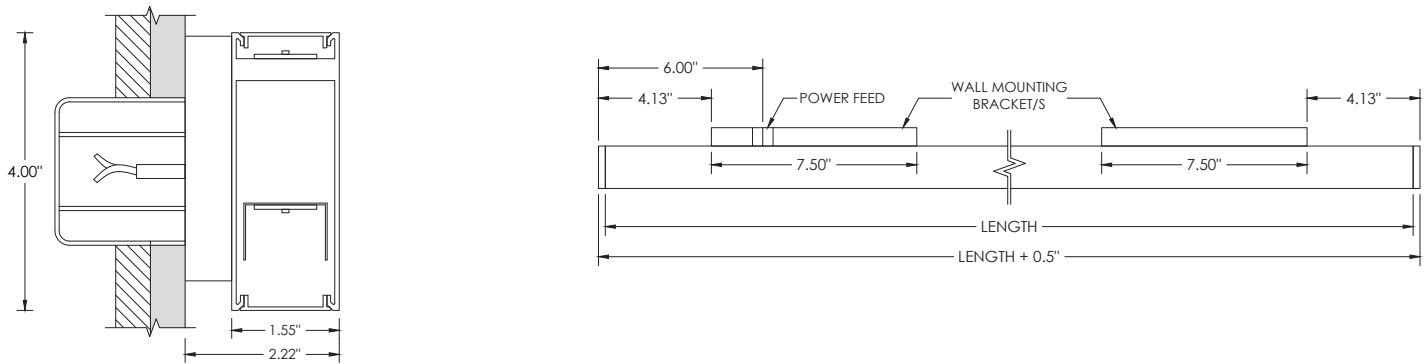

POWER FEED	NON POWER FEED
2" x 4" SLOTTED JUNCTION BOX (BY OTHERS)	MOUNTING SCREWS (BY OTHERS)
