



### COMPONENTS



#### STANDARD CANOPY

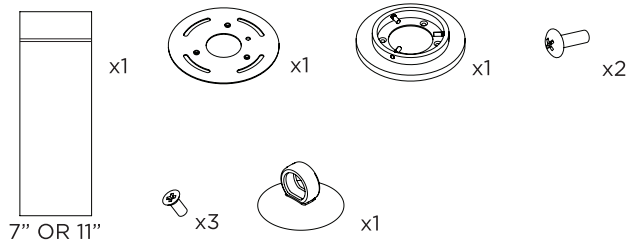


#### CONDUIT FEED CANOPY

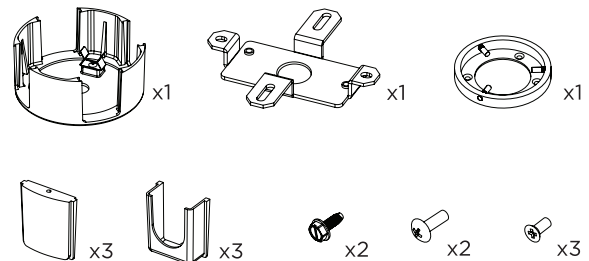

#### SEAMLESS CANOPY (FOR NEW CONSTRUCTION ONLY)

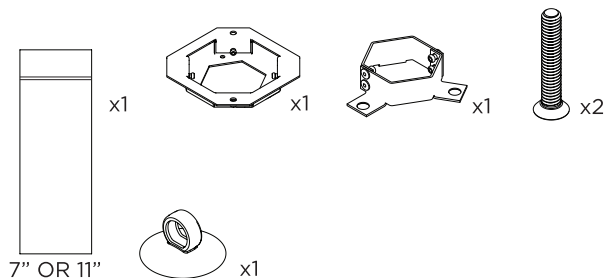

#### 4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

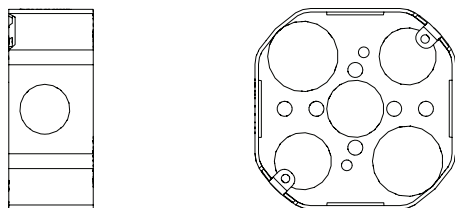


JUNCTION BOX (BY OTHERS)










#### INSTRUCTION KEY









#### INFORMATION

- ⚠️ ADDITIONAL
- ⓘ ATTENTION
- ⚡ POWER ON
- ⏻ POWER OFF


INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN  
REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION  
FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY  
DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS  
TURN OFF POWER DURING INSTALLATION OR SERVICING

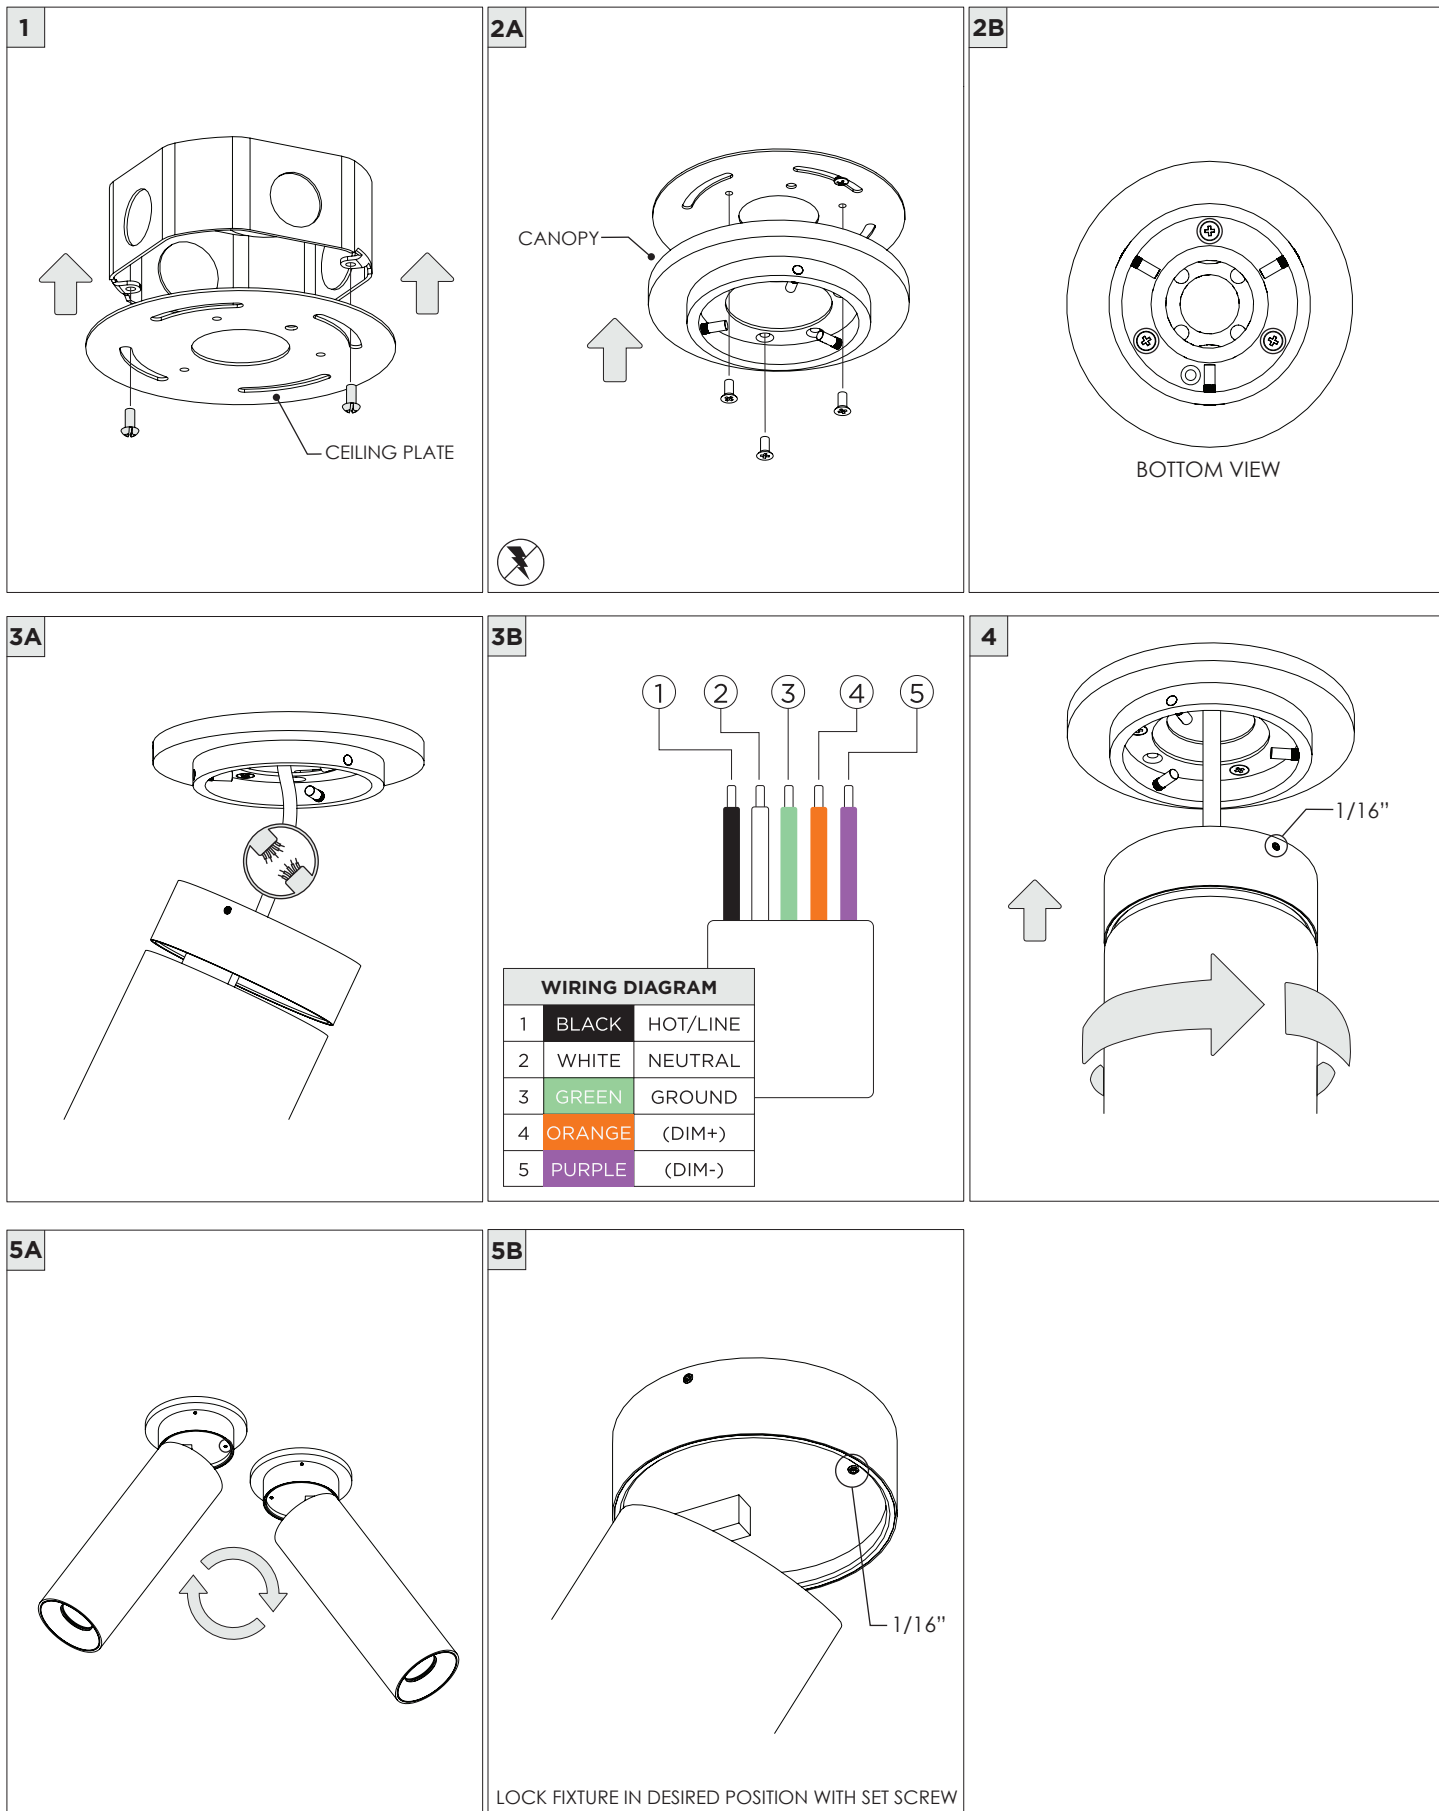

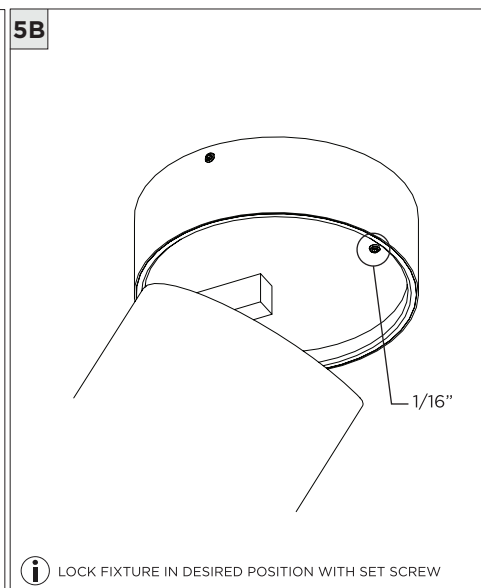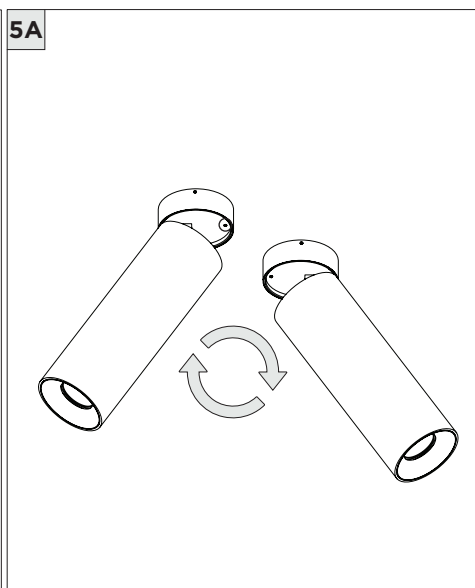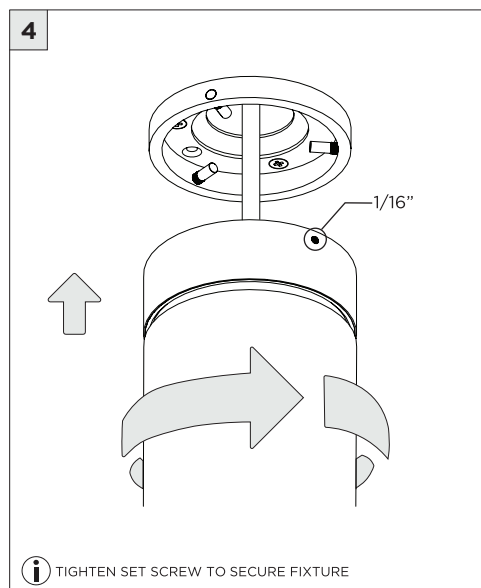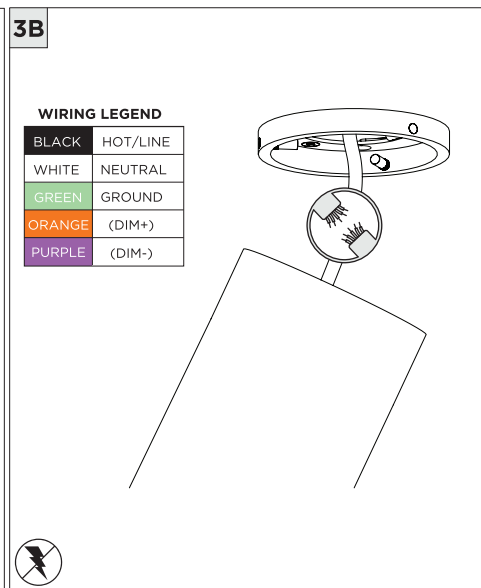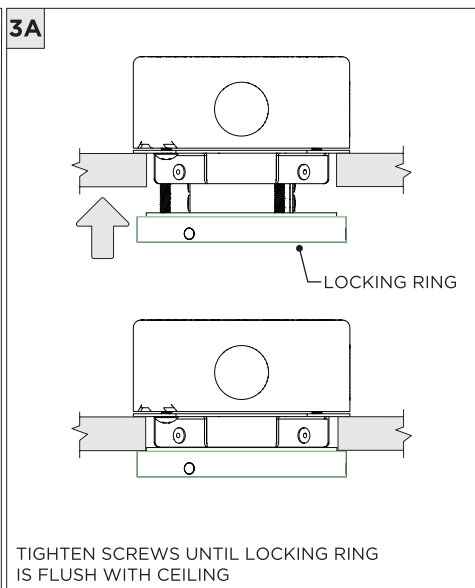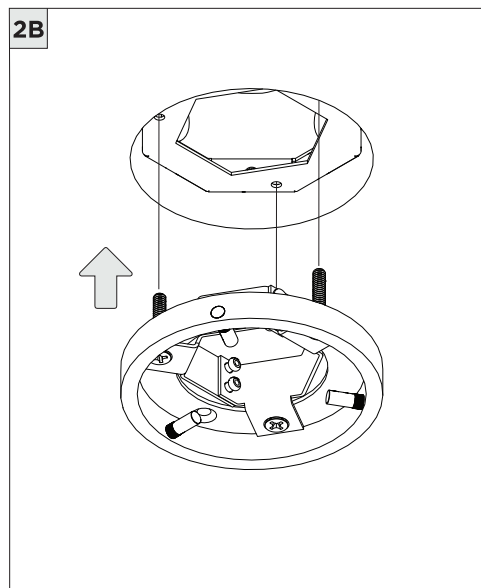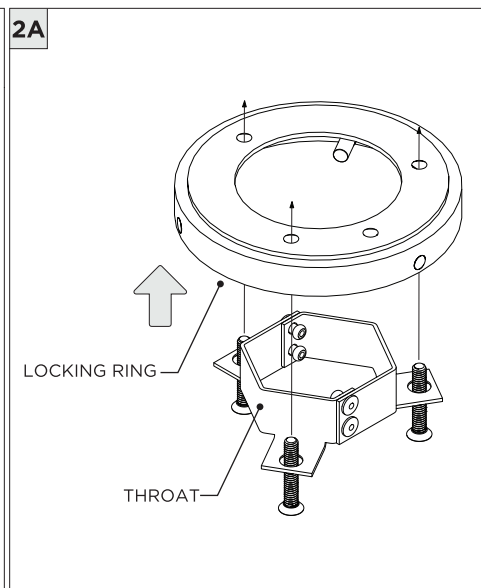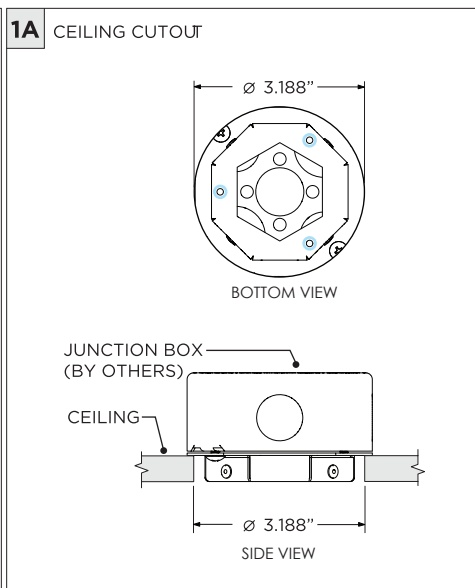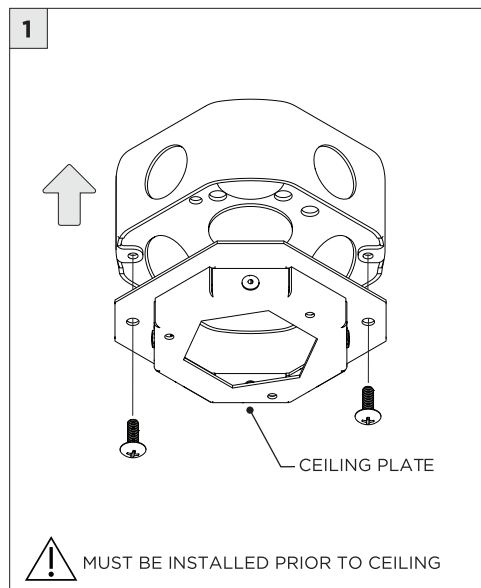


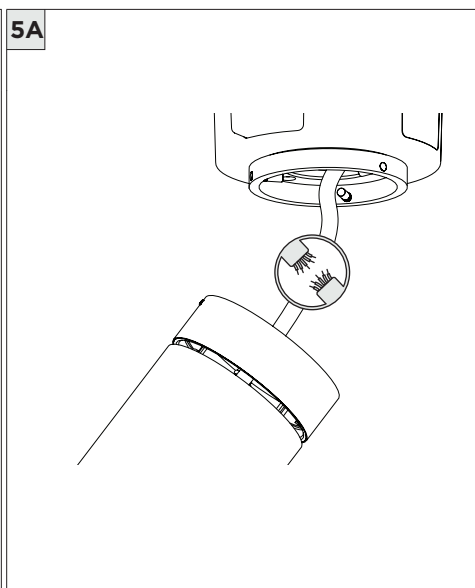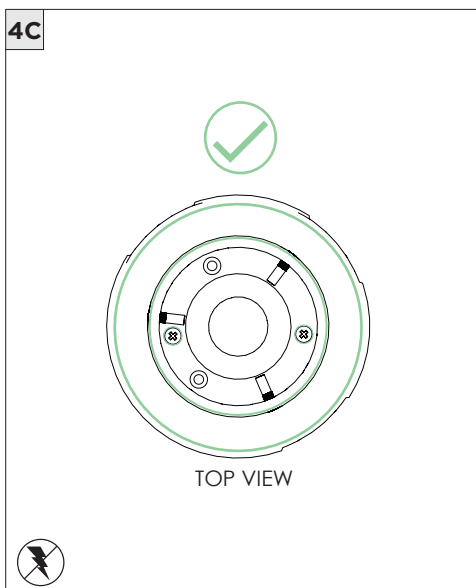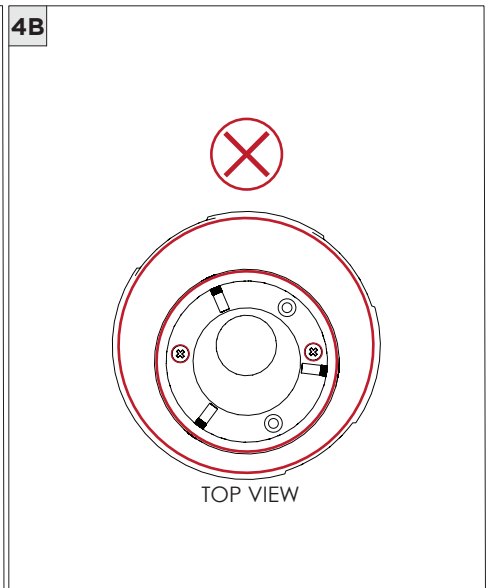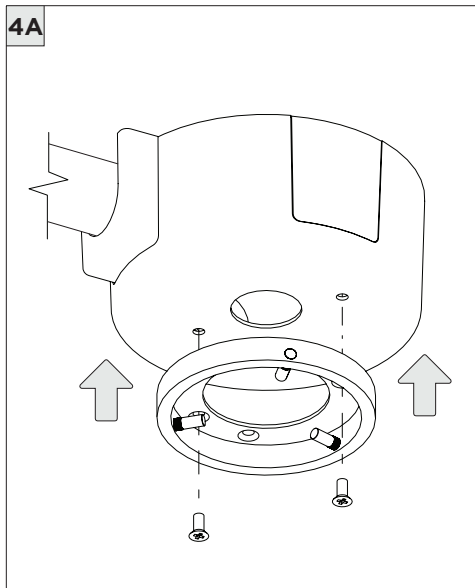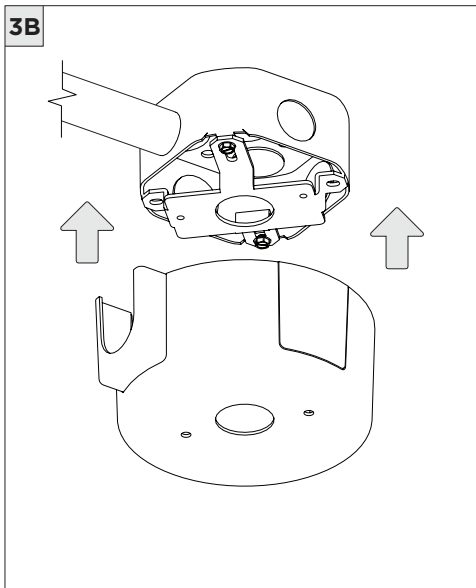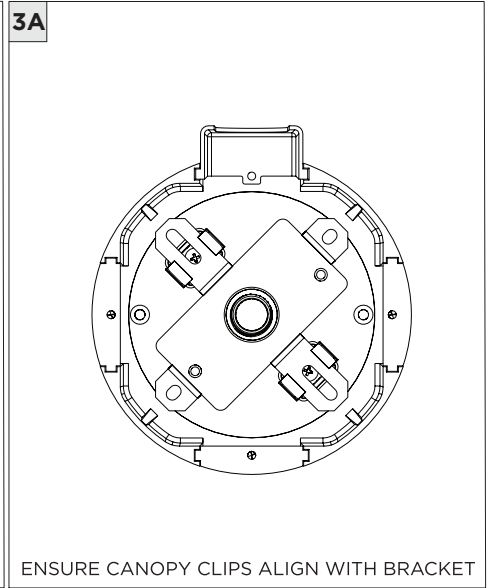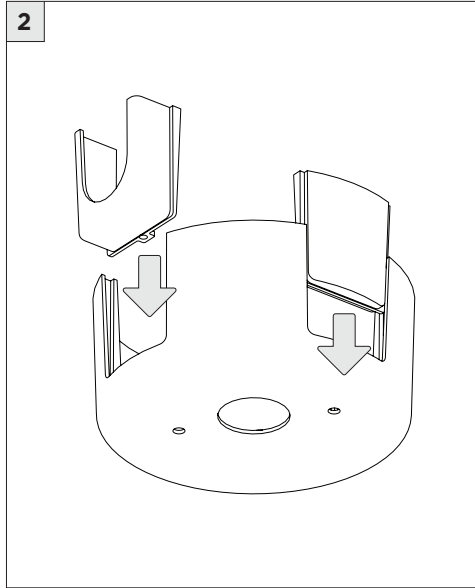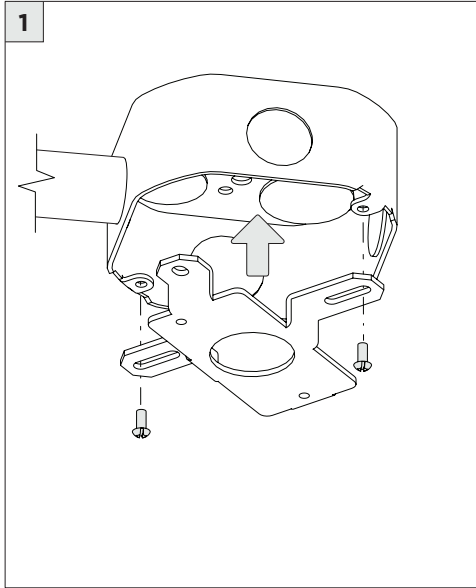


6A

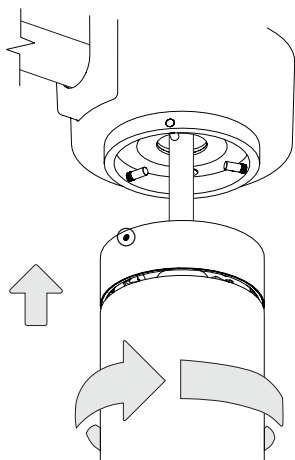

6B

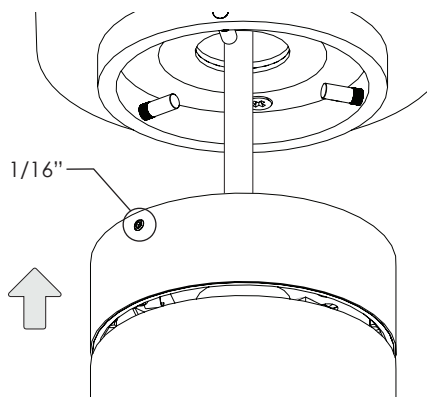


7A

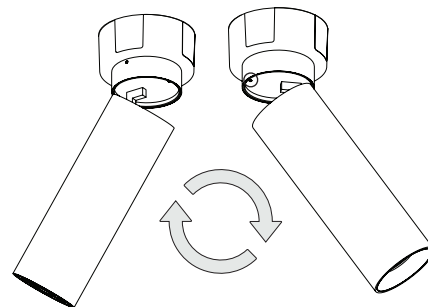


ROTATE FIXTURE TO DESIRED POSITION

7B

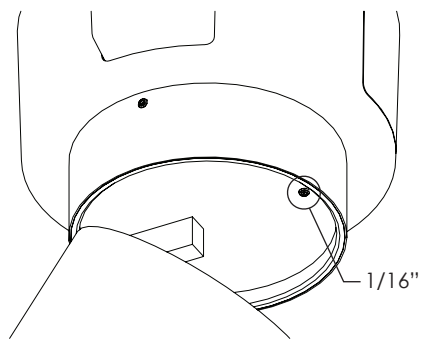


LOCK FIXTURE IN DESIRED POSITION WITH SET SCREW

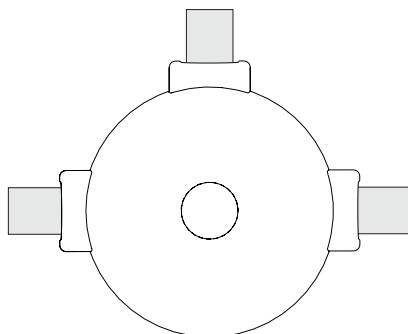


CANOPY IS SUITABLE FOR  
MAXIMUM 3 CONDUIT FEEDS

## DRIVER SERVICING


1

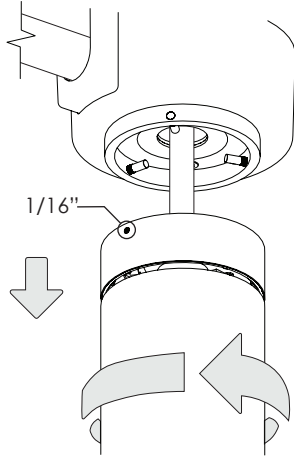

2

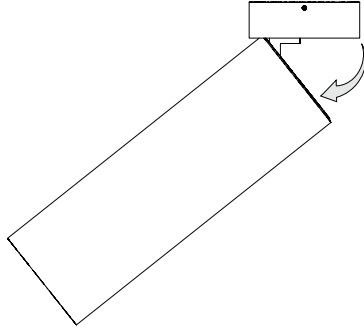


3

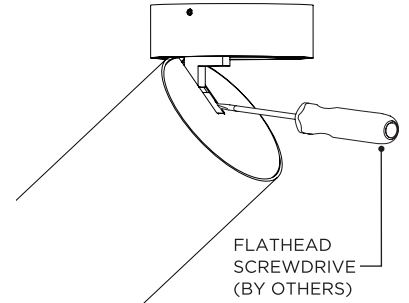


REMOVE MAGNETIC PLATE

4

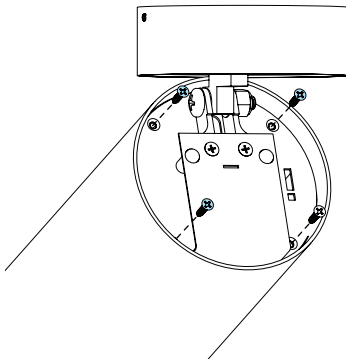


5

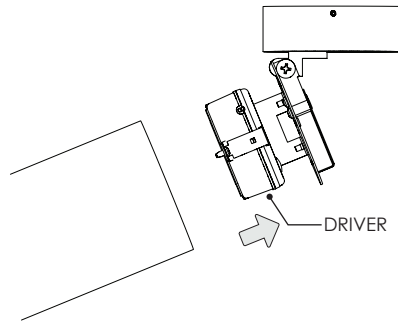


## LED SERVICING

1

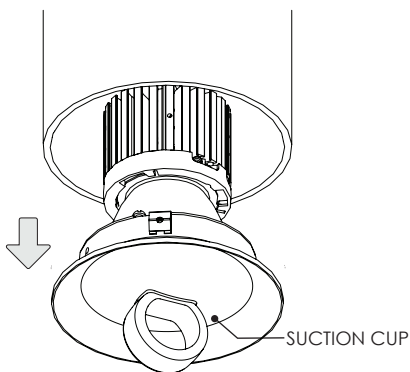


REPEAT DRIVER SERVICING STEPS  
DISCONNECT LED WIRES AND REMOVE LED INSERT

2

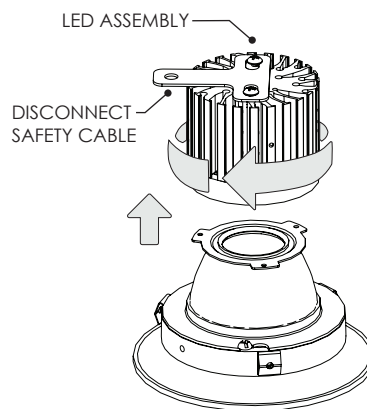


## DRIVER SERVICING


1

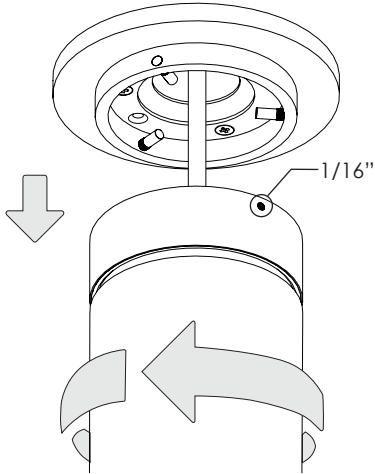

2

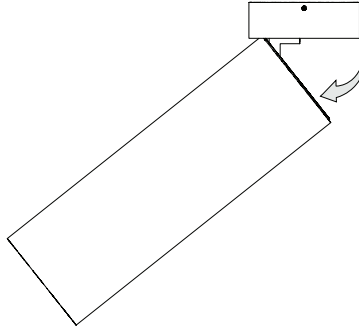


3

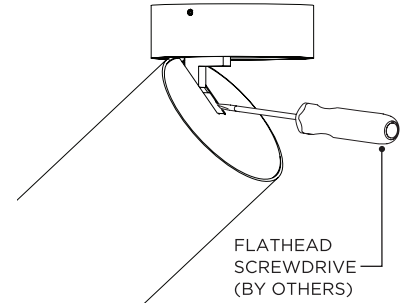


REMOVE MAGNETIC PLATE

4

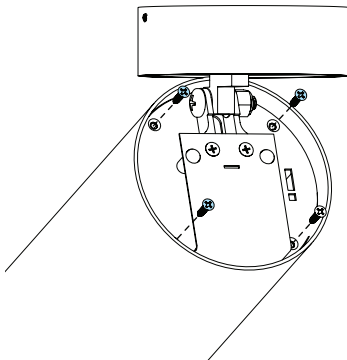


5

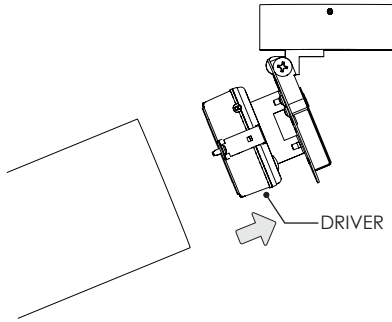

## LED SERVICING

1

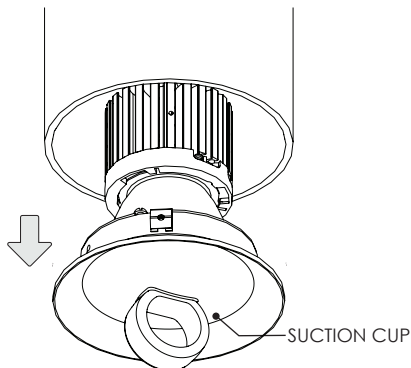

REPEAT DRIVER SERVICING STEPS  
DISCONNECT LED WIRES AND REMOVE LED INSERT

2

