



THE IMAGES SHOWN ARE FOR ILLUSTRATION ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

COMPONENTS

STANDARD CANOPY

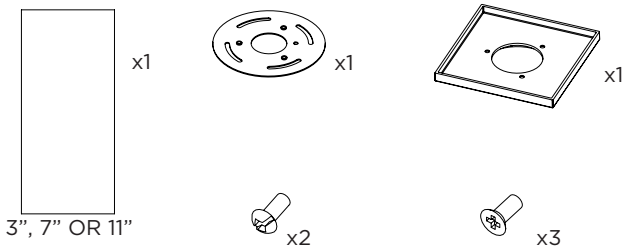

4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION





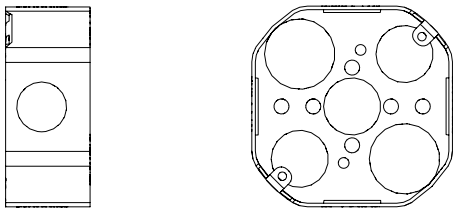


JUNCTION BOX (BY OTHERS)

INSTRUCTION KEY


INFORMATION

⚠	ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
ⓘ	ATTENTION	REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
⚡	POWER ON	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
⏻	POWER OFF	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
		TURN OFF POWER DURING INSTALLATION OR SERVICING

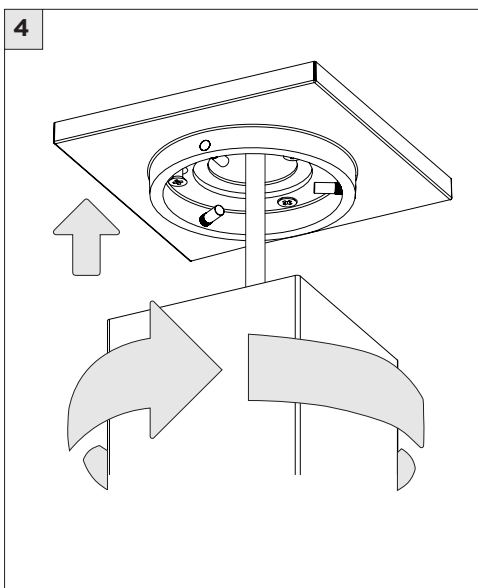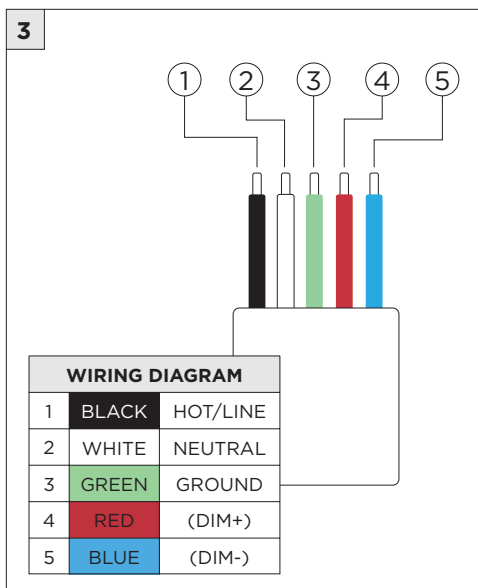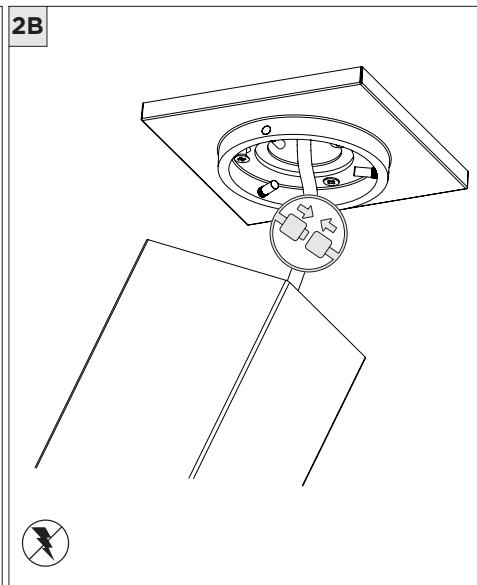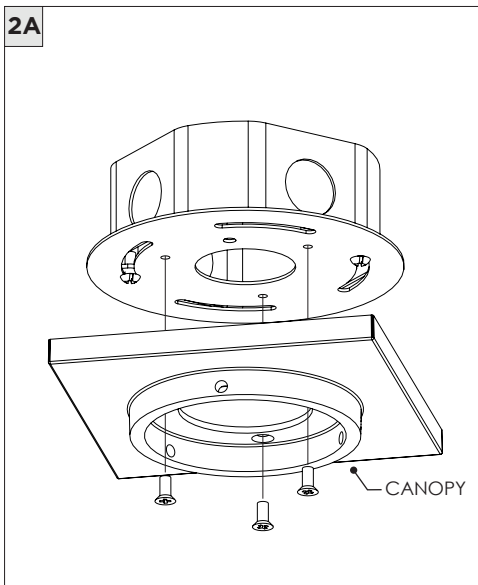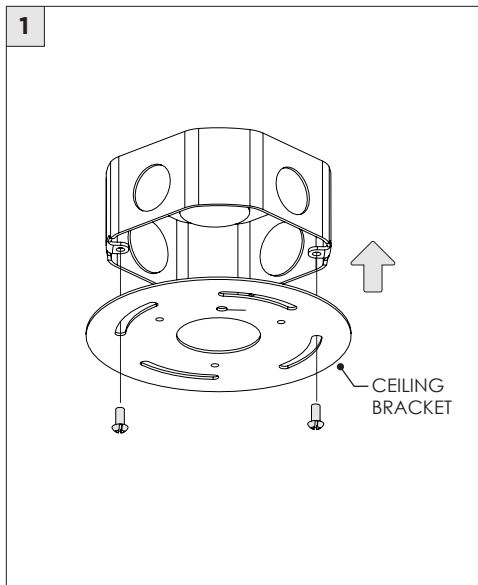


## DRIVER SERVICING


1

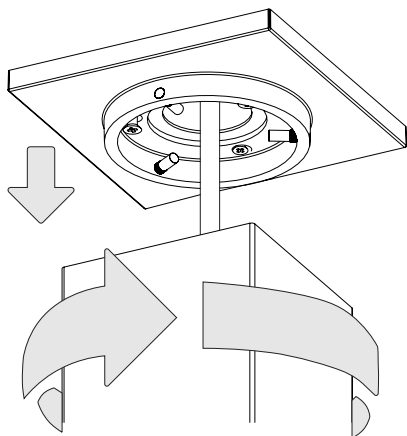

2

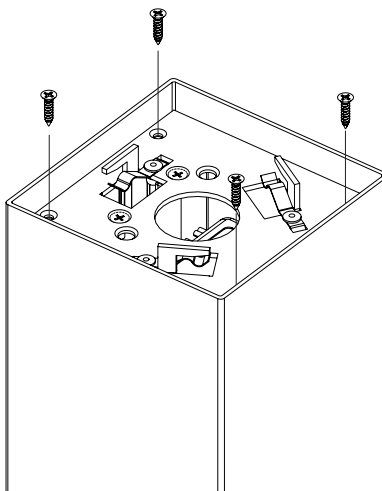


3

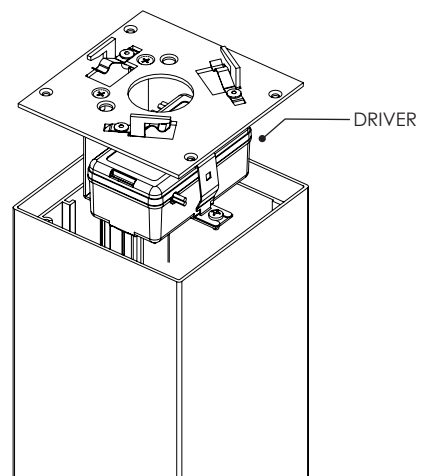


## LED SERVICING

1

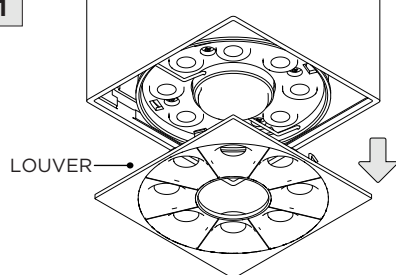


UNCLIP LOUVER FROM LED ASSEMBLY

2




LOCATE FOUR SCREWS

3

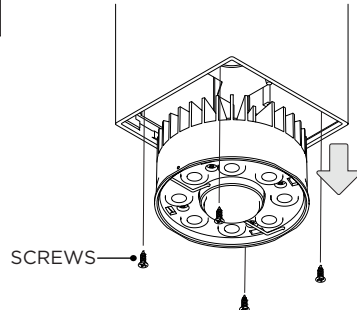


UNSCREW SCREWS TO REMOVE LED ASSEMBLY

4

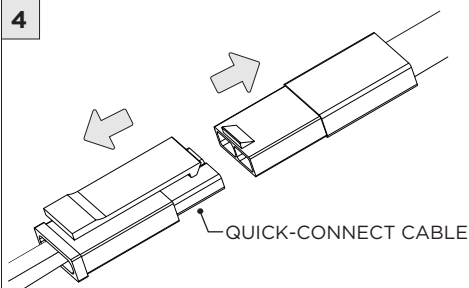


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

5

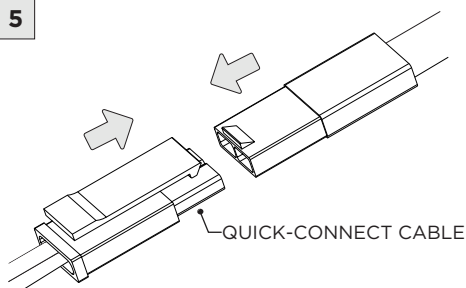

CONNECT QUICK-CONNECT CABLE TO NEW LED ASSEMBLY

6

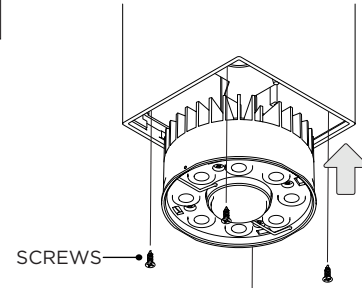

SCREW NEW LED ASSEMBLY INTO CYLINDER

7

