

## 3.3" ADJUSTABLE ZOE CYLINDER


SURFACE MOUNT




THE IMAGES SHOWN ARE FOR ILLUSTRATION ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

### COMPONENTS



#### STANDARD CANOPY

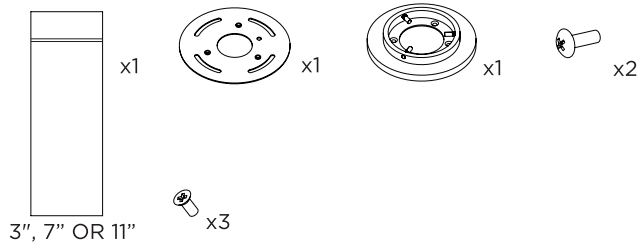


#### SEAMLESS CANOPY (FOR NEW CONSTRUCTION ONLY)

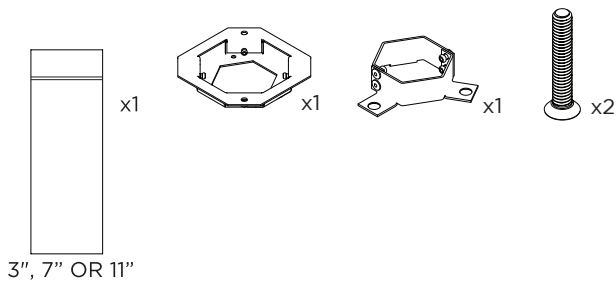

#### CONDUIT FEED CANOPY








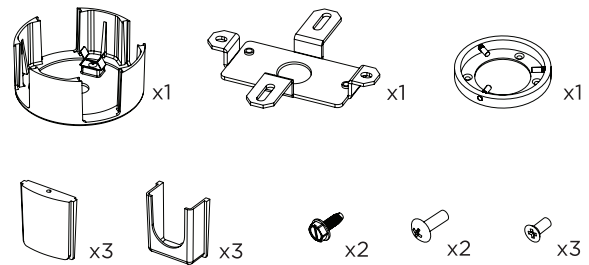


#### 4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

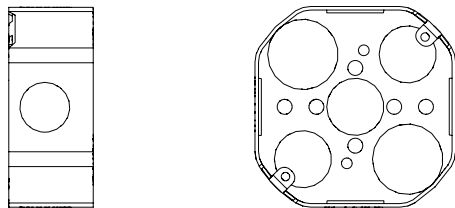


JUNCTION BOX (BY OTHERS)

INSTRUCTION KEY	INFORMATION
⚠	ADDITIONAL
ⓘ	ATTENTION
⚡	POWER ON
⏻	POWER OFF
	<p>INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN</p> <p>REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION</p> <p>FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY</p> <p>DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS</p> <p>TURN OFF POWER DURING INSTALLATION OR SERVICING</p>

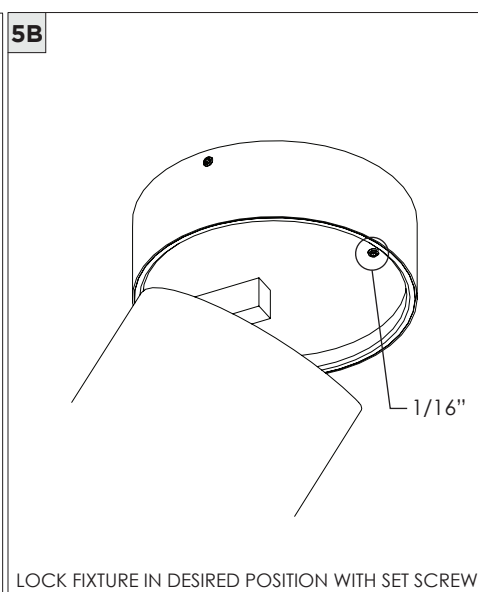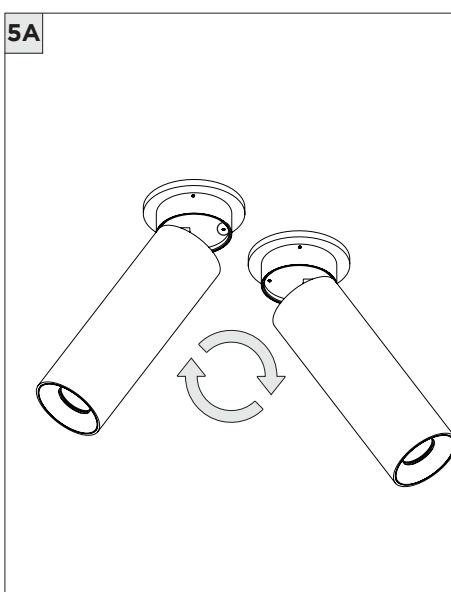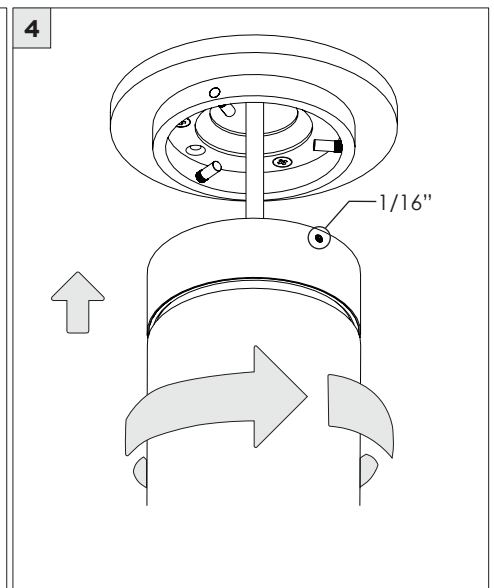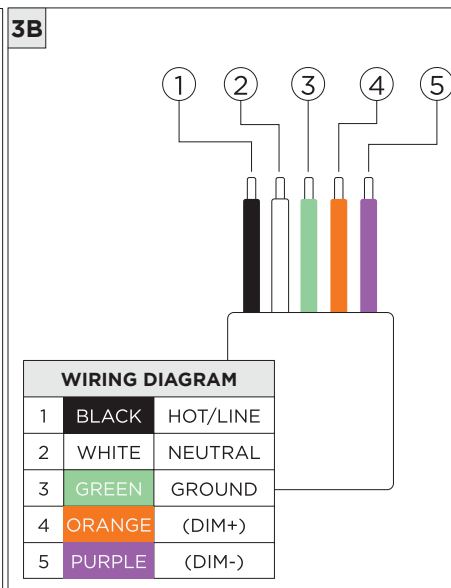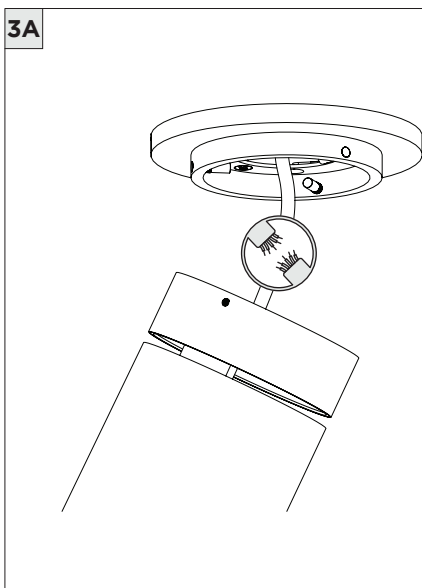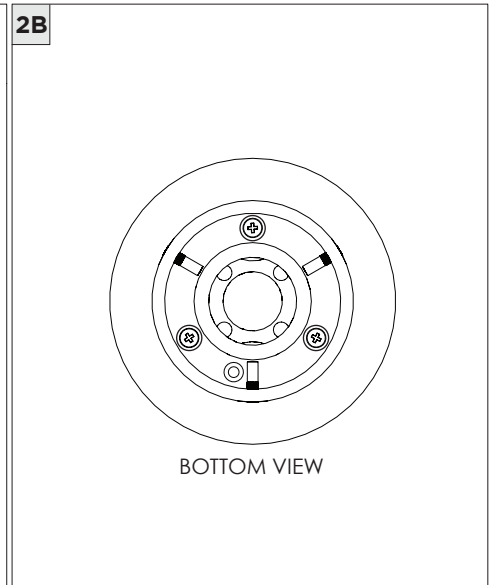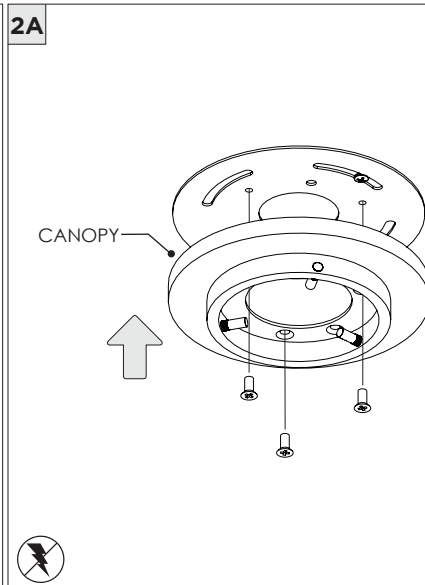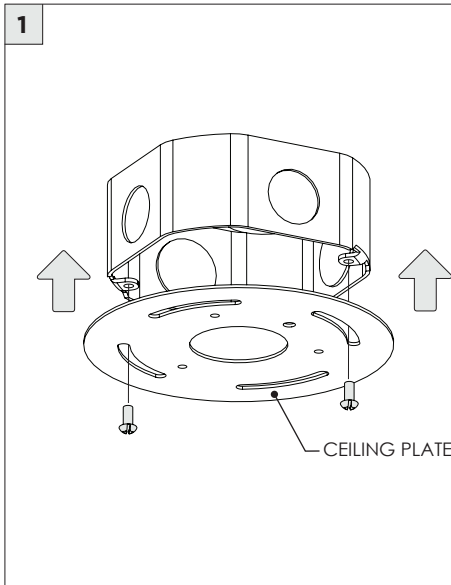


1

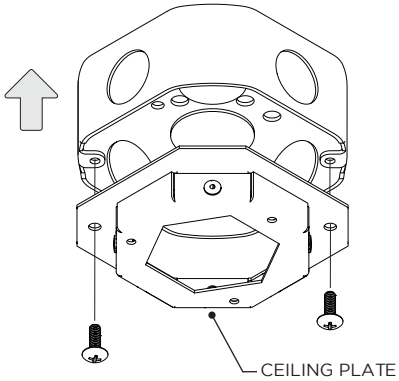


MUST BE INSTALLED PRIOR TO CEILING


1A CEILING CUTOUT

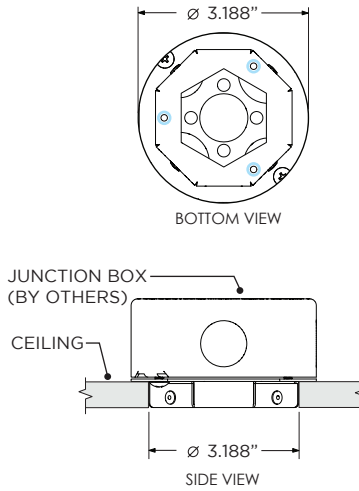


2A

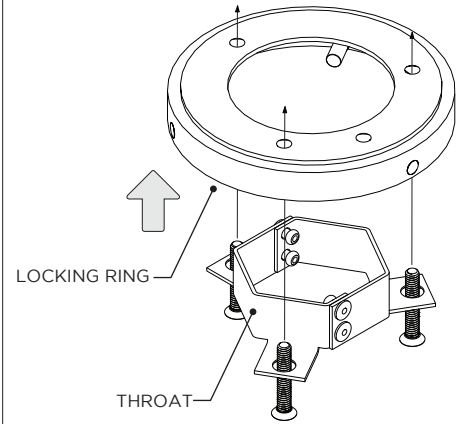

2B

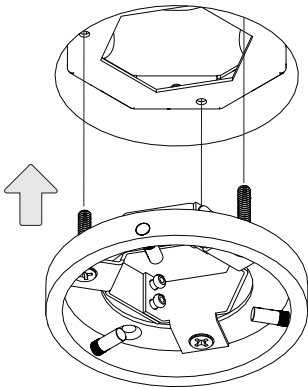

3A

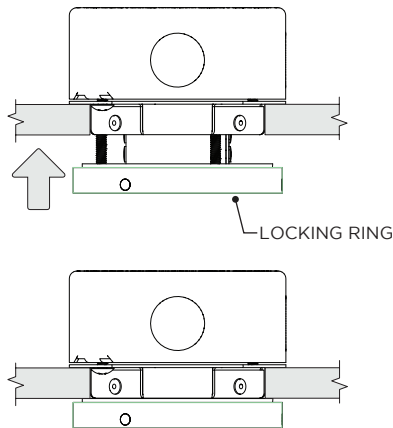


TIGHTEN SCREWS UNTIL LOCKING RING IS FLUSH WITH CEILING


3B

**WIRING LEGEND**

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM+)
PURPLE	(DIM-)

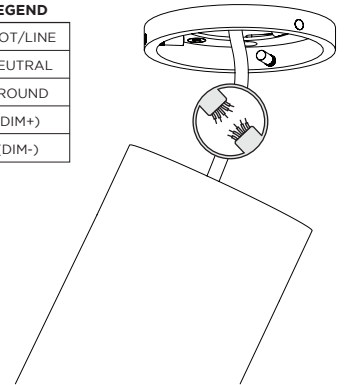


4

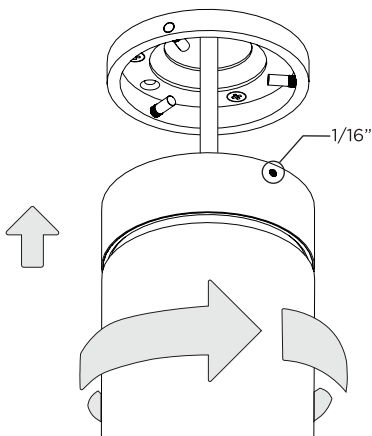


TIGHTEN SET SCREW TO SECURE FIXTURE









5A

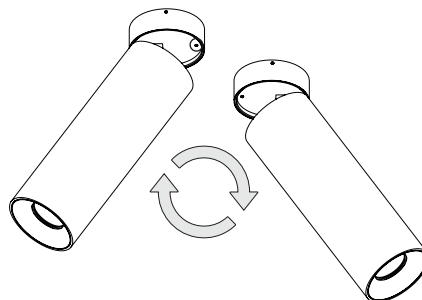


5B

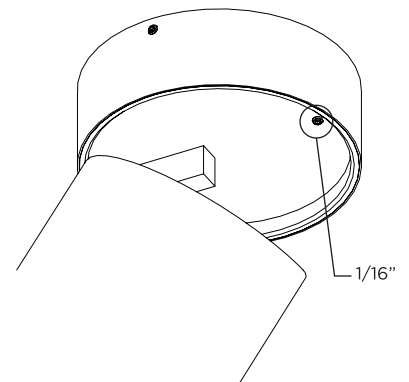


LOCK FIXTURE IN DESIRED POSITION WITH SET SCREW

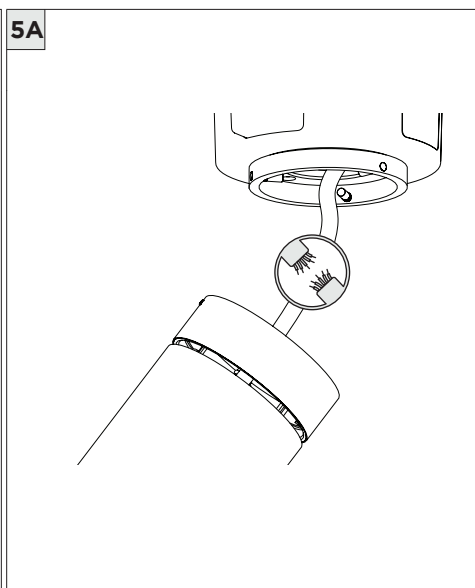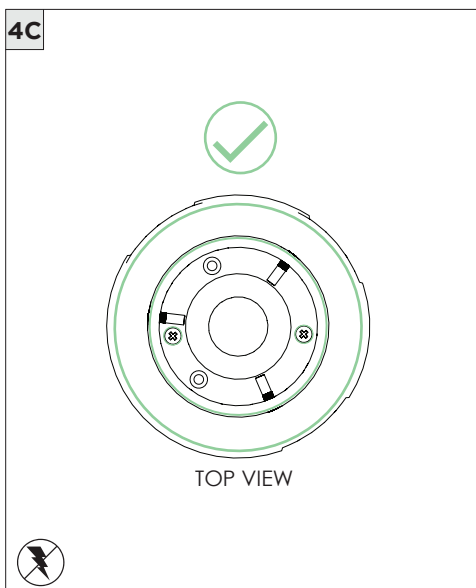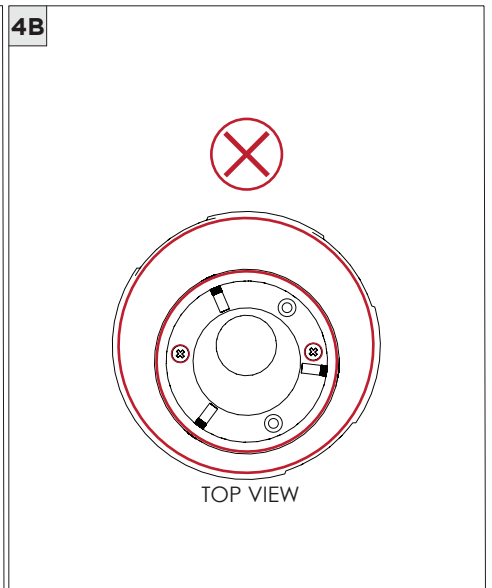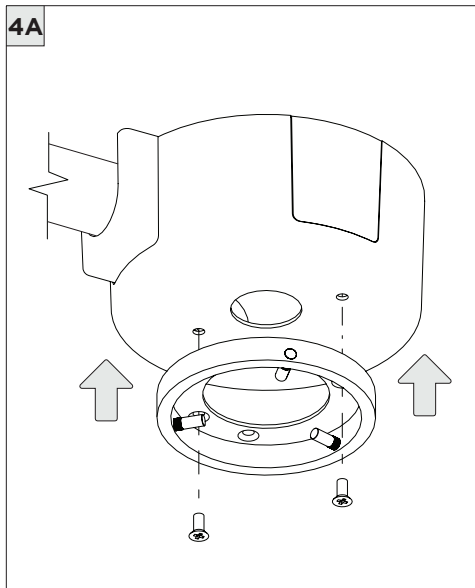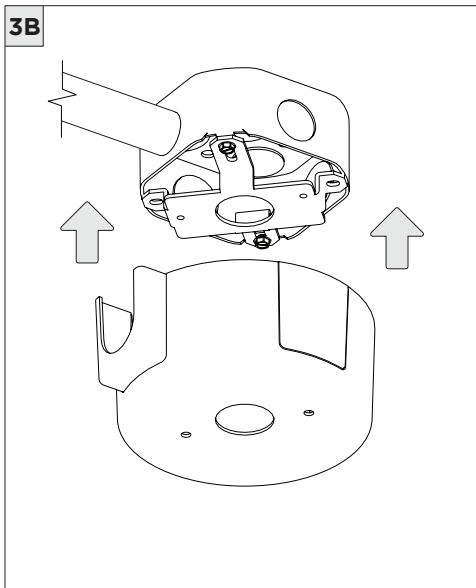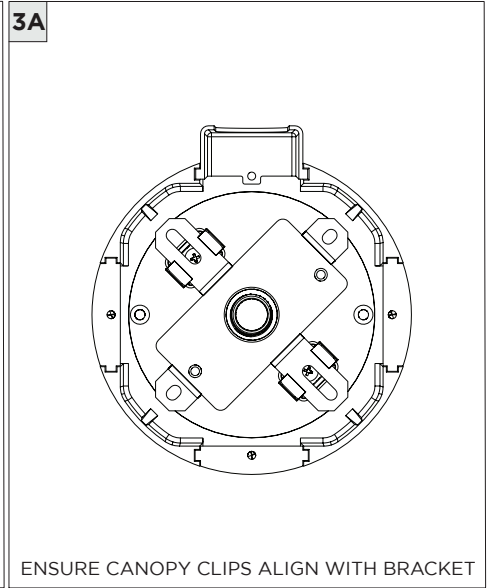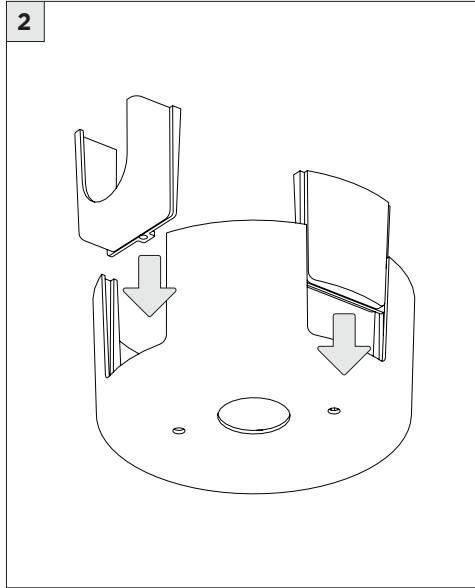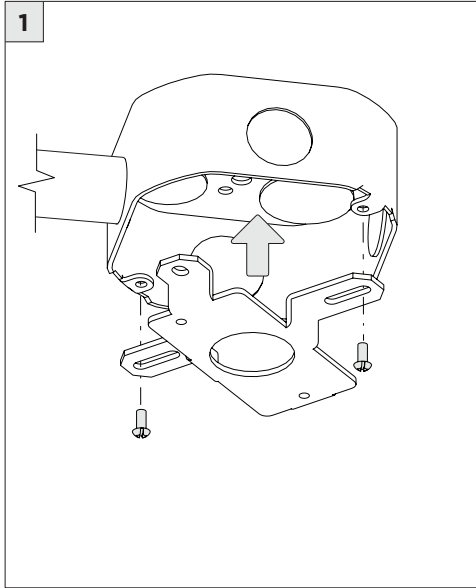


6A

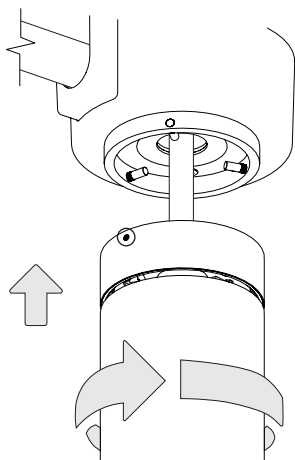

6B

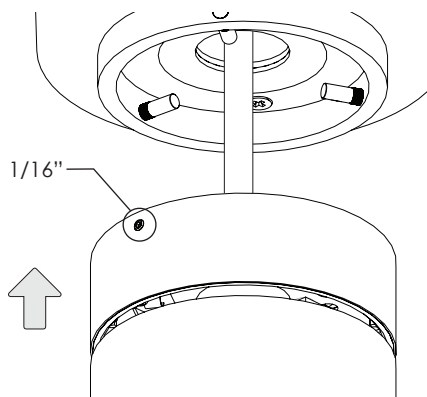


7A

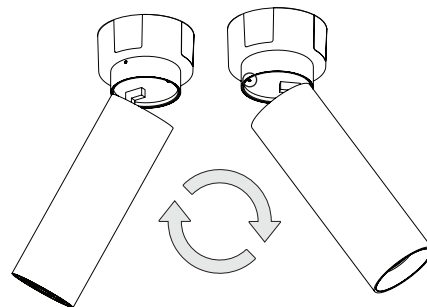


ROTATE FIXTURE TO DESIRED POSITION

7B

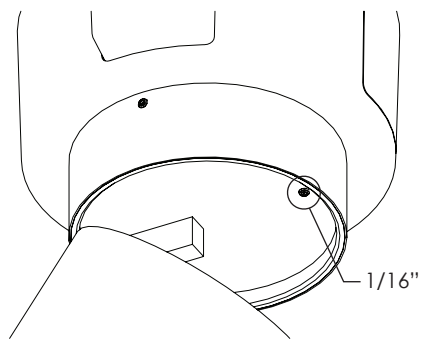


LOCK FIXTURE IN DESIRED POSITION WITH SET SCREW

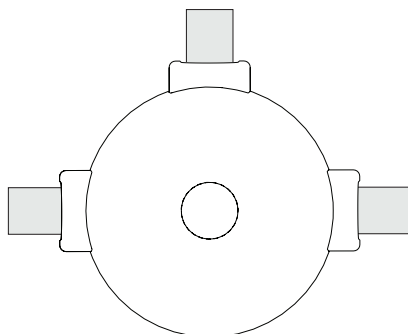


CANOPY IS SUITABLE FOR  
MAXIMUM 3 CONDUIT FEEDS

**DRIVER SERVICING**


**1**

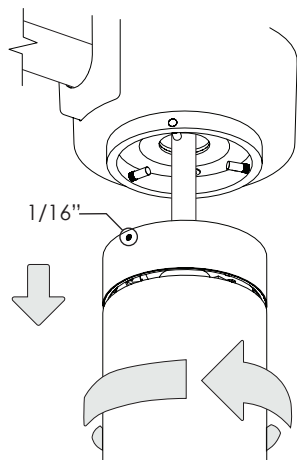

**2**

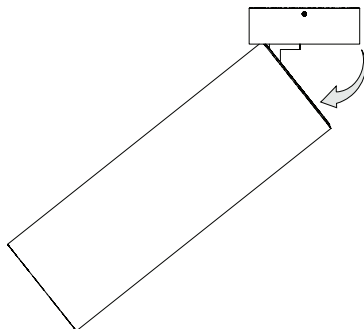


**3**

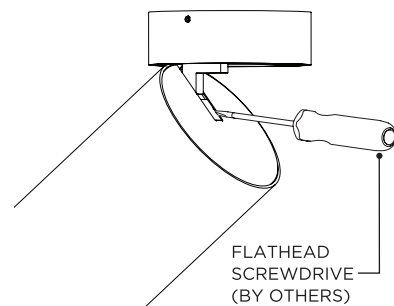


REMOVE MAGNETIC PLATE

**4**

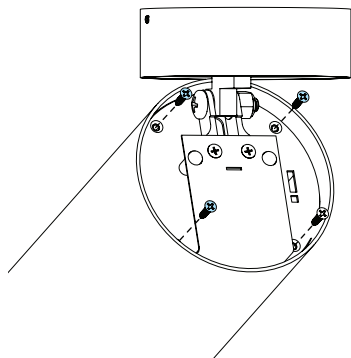


**5**

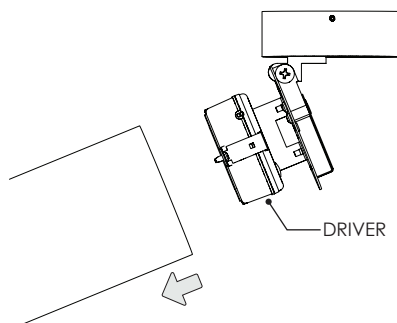


**DRIVER SERVICING**


**1**

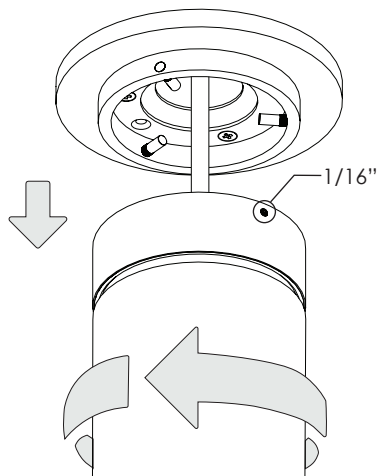

**2**

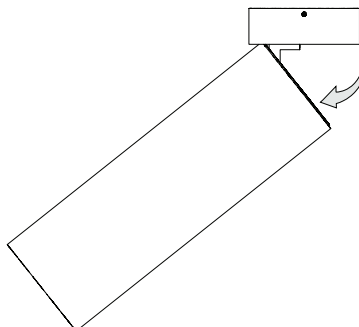


**3**

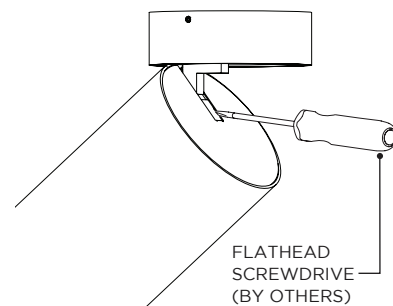


REMOVE MAGNETIC PLATE

**4**

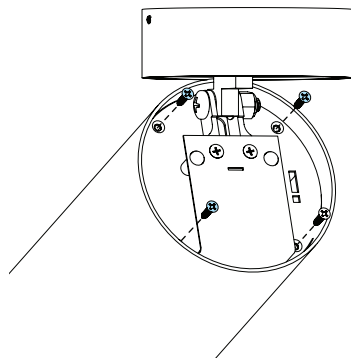


**5**

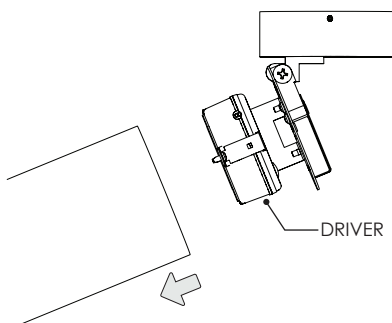


**LED SERVICING**

**1**

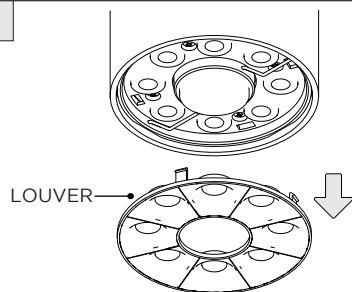


UNCLIP LOUVER FROM LED ASSEMBLY

**2**




UNCLIP CENTER CAP FROM LED ASSEMBLY

**3**




LOCATE CENTER SCREW

**4**




UNSCREW CENTER SCREW TO REMOVE LED ASSEMBLY

**5**

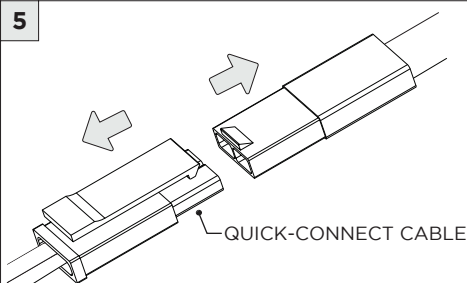


DISCONNECT QUICK-CONNECT CABLE FROM LED ASSEMBLY

**6**

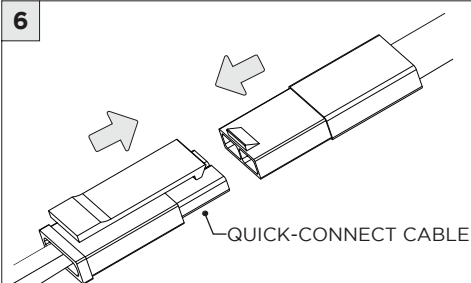


CONNECT QUICK-CONNECT CABLE TO NEW LED ASSEMBLY

**7**



SCREW NEW LED ASSEMBLY INTO CYLINDER

**8**



**9**

