

4.5" WALLWASH CYLINDER - PENDANT


CABLE PENDANT MOUNT




THE IMAGES SHOWN ARE FOR ILLUSTRATION ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

COMPONENTS


STANDARD CANOPY

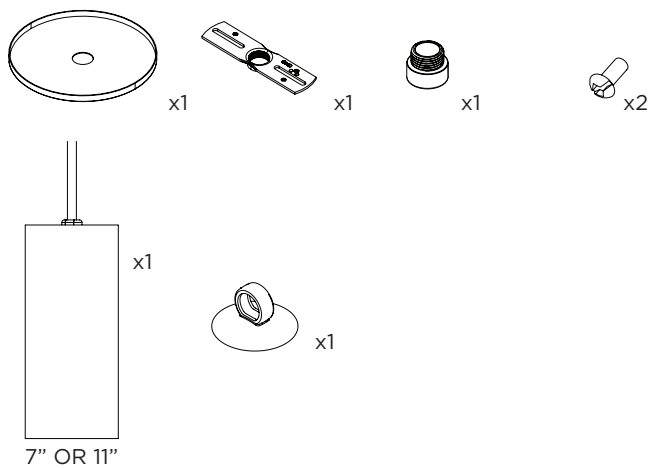


CONDUIT FEED CANOPY

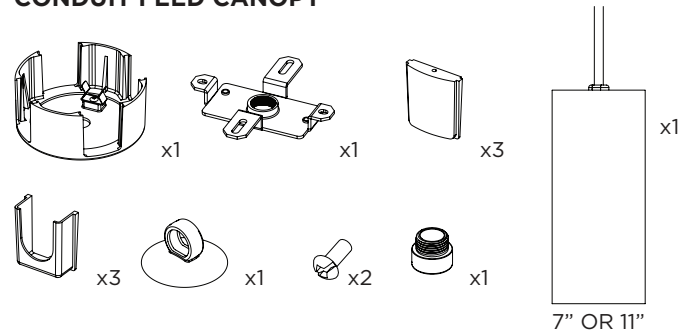

POWER CANOPY

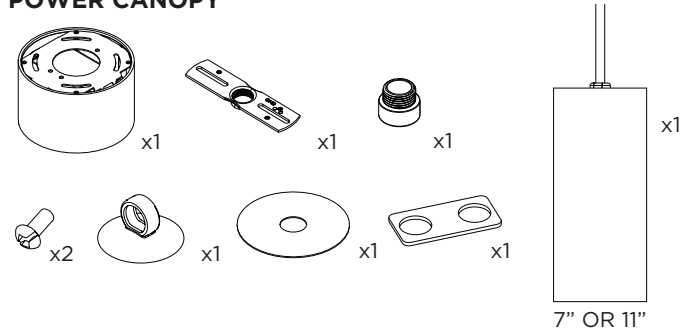










4" OCTAGONAL J-BOX REQUIRED FOR INSTALLATION

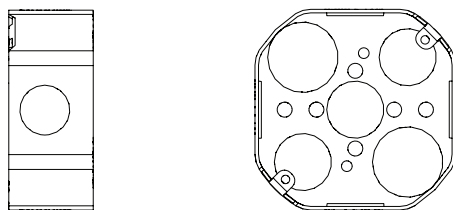


JUNCTION BOX (BY OTHERS)


INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
ⓘ ATTENTION	REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
⚡ POWER ON	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
⏻ POWER OFF	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING

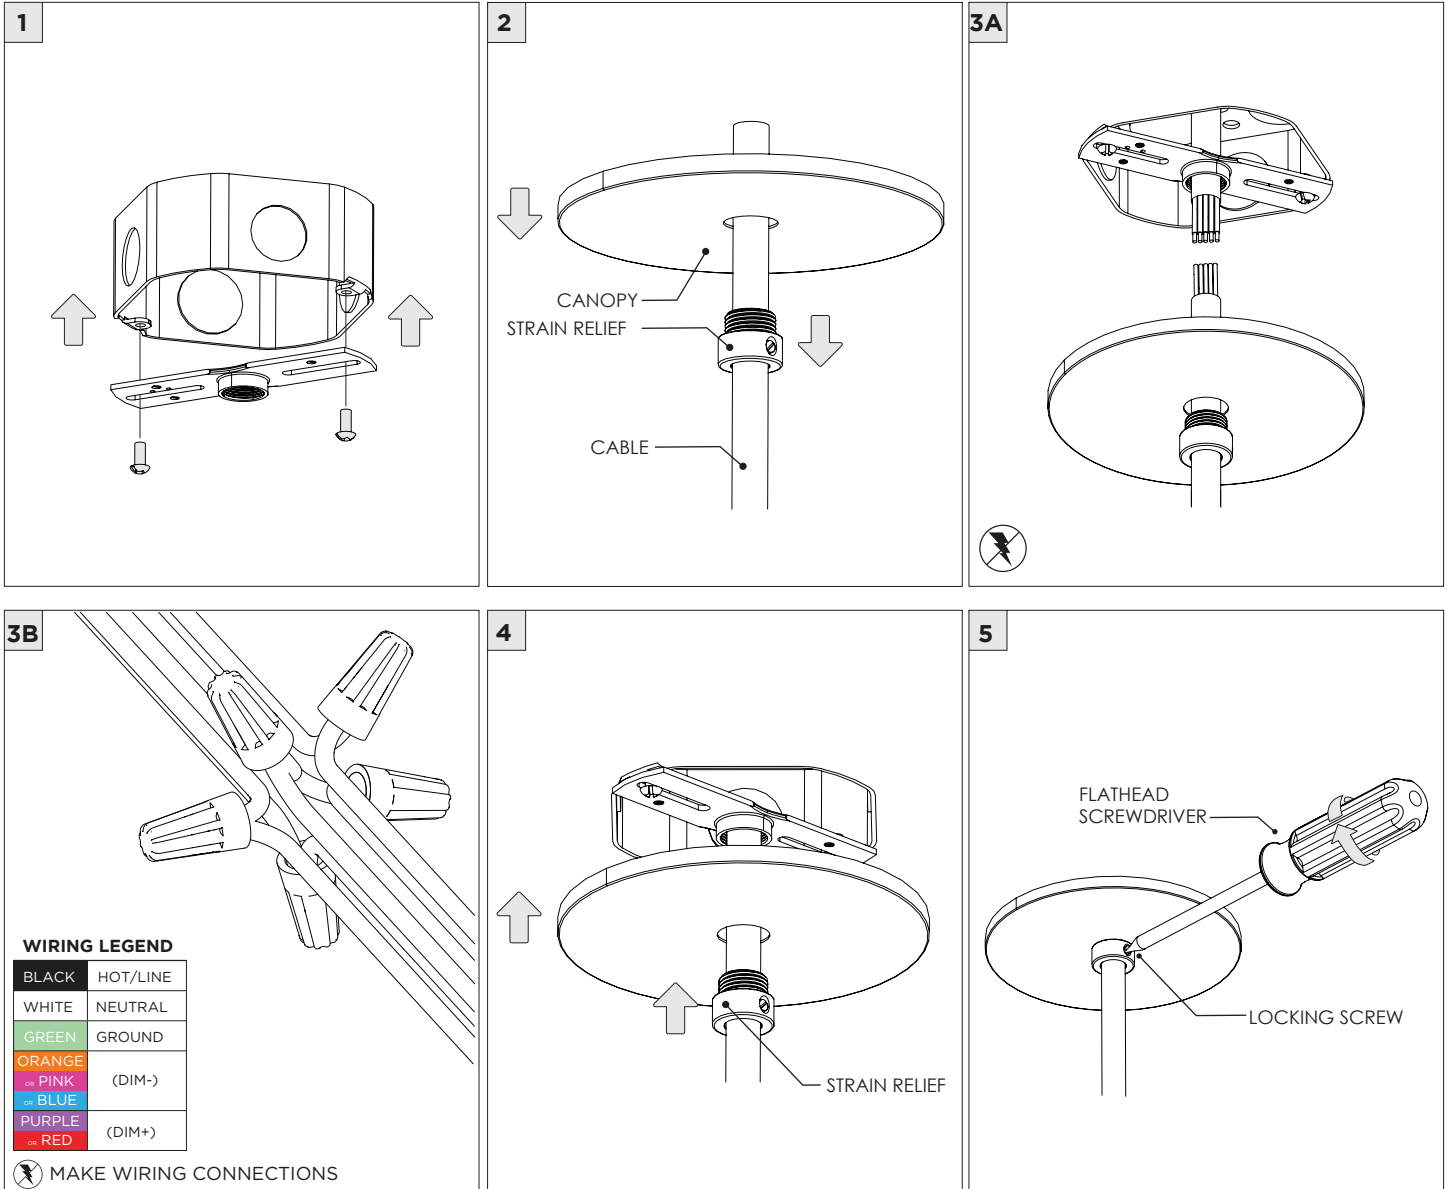

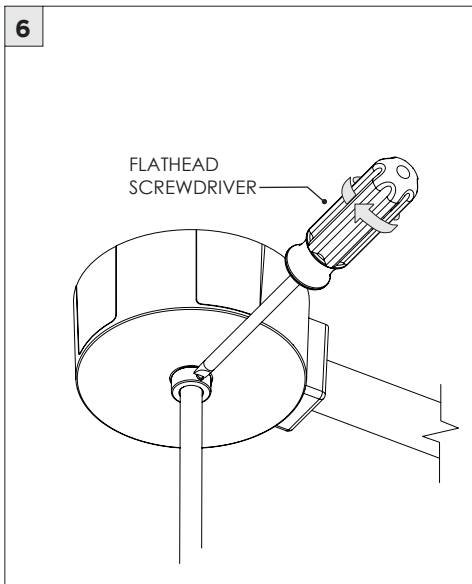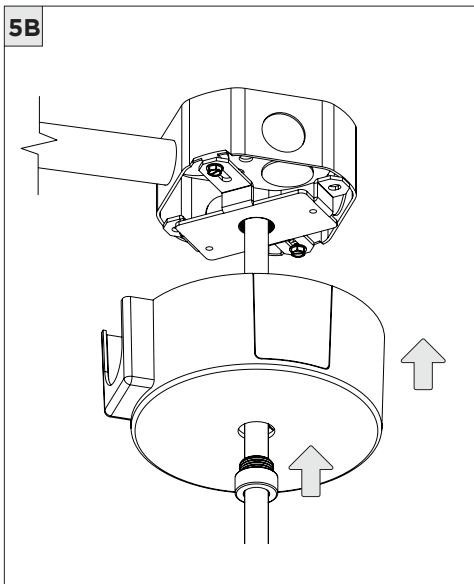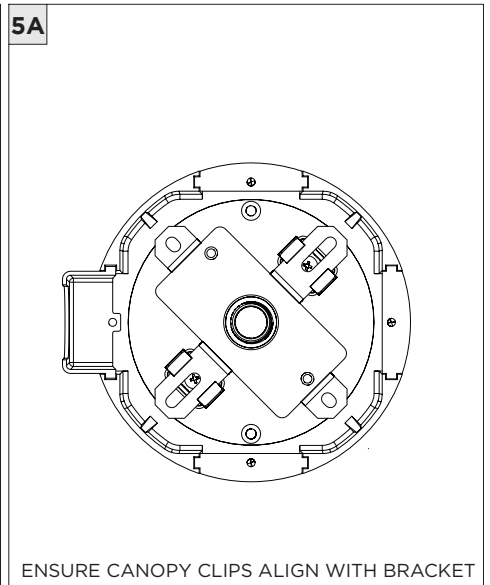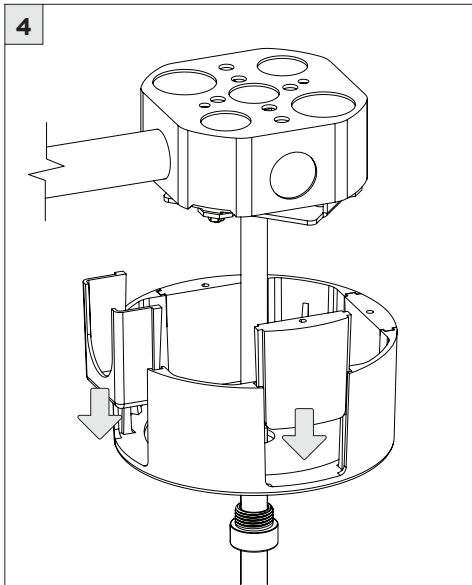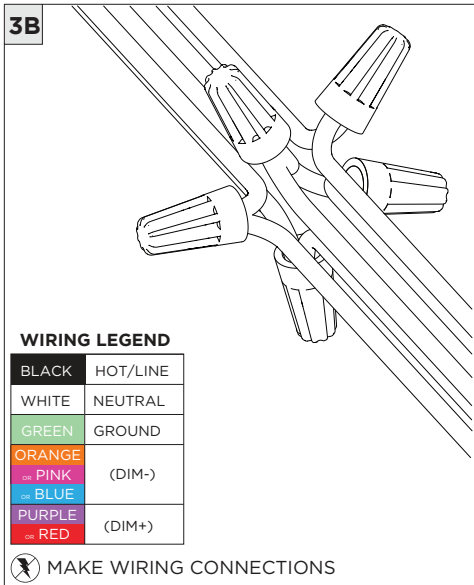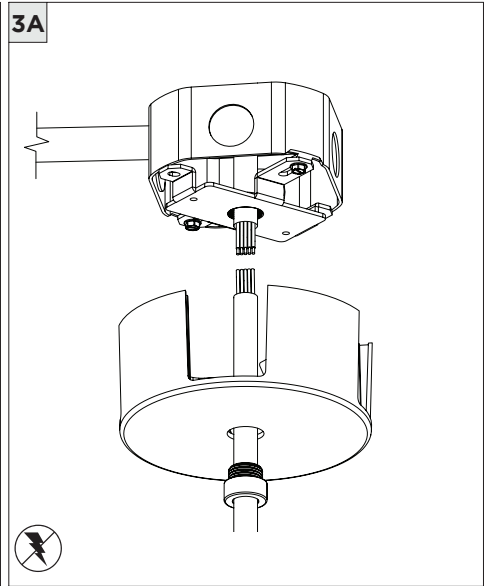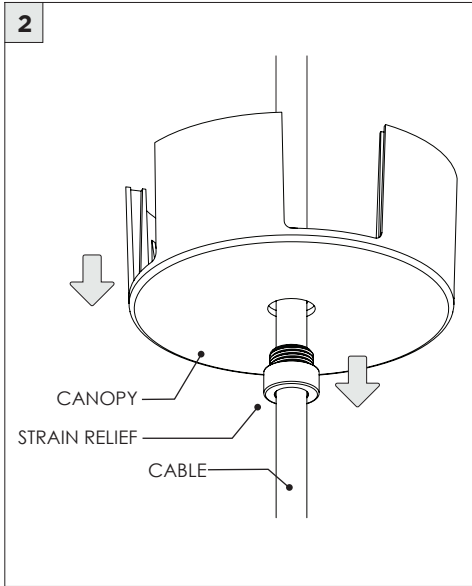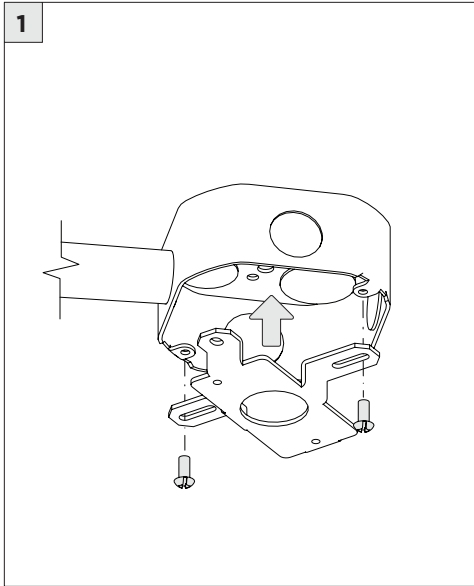


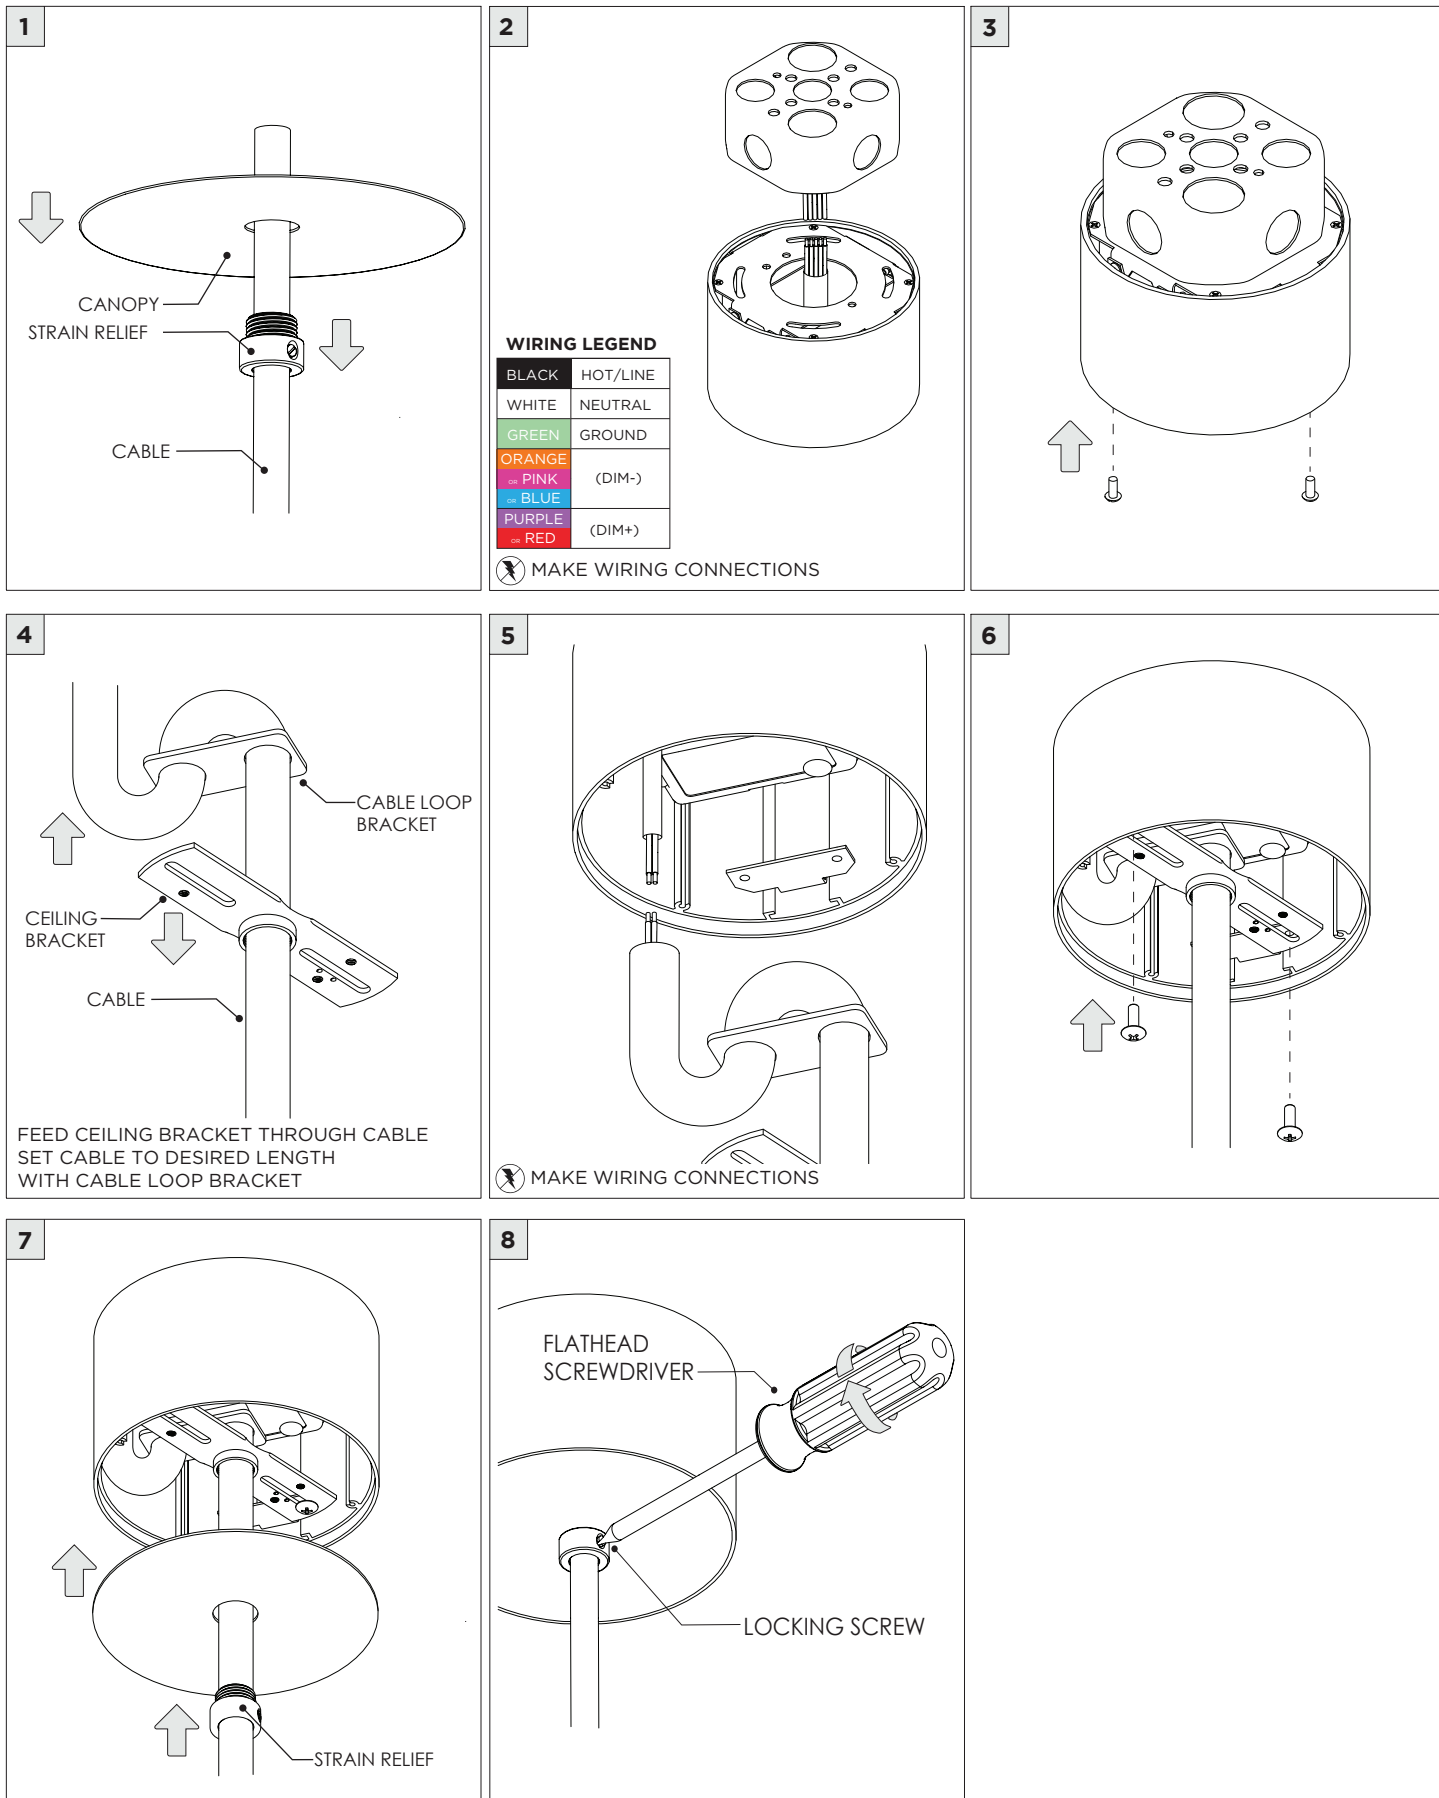


1 CONDUIT FEED CANOPY

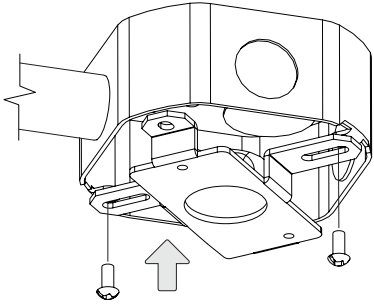

2

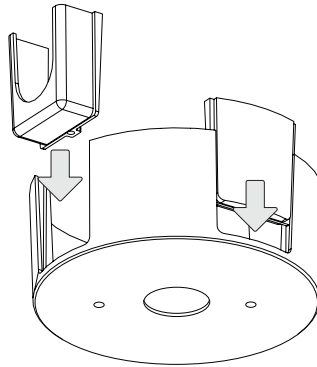


3

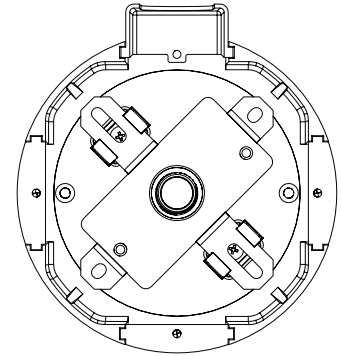


ENSURE CANOPY CLIPS ALIGN WITH BRACKET

4

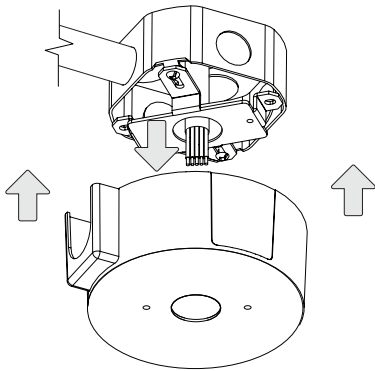


CONNECT CANOUIT CANOPY AND FEED
JUNCTION BOX WIRES THROUGH HOLE

5

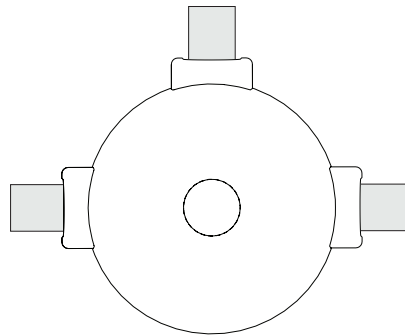

! CANOPY IS SUITABLE FOR
MAXIMUM 3 CONDUIT FEEDS

6 POWER CANOPY

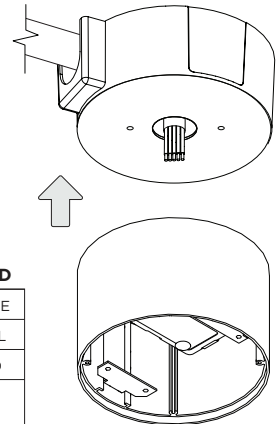


WIRING LEGEND


BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PINK	(DIM-)
BLUE	(DIM-)
PURPLE	(DIM+)
RED	(DIM+)

⚡ MAKE WIRING CONNECTIONS


7





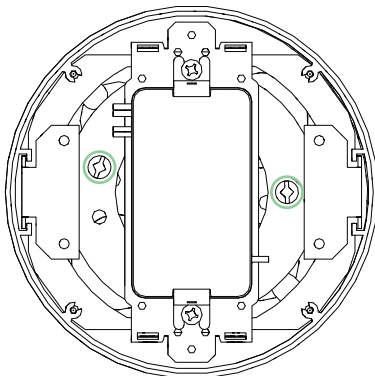


8

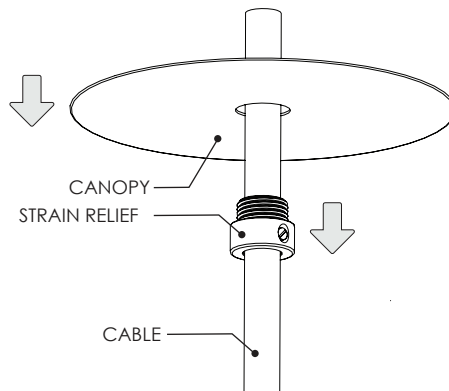


9

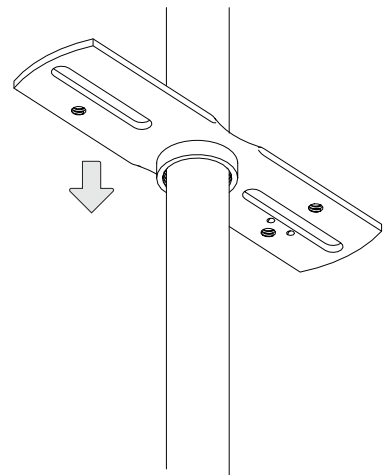

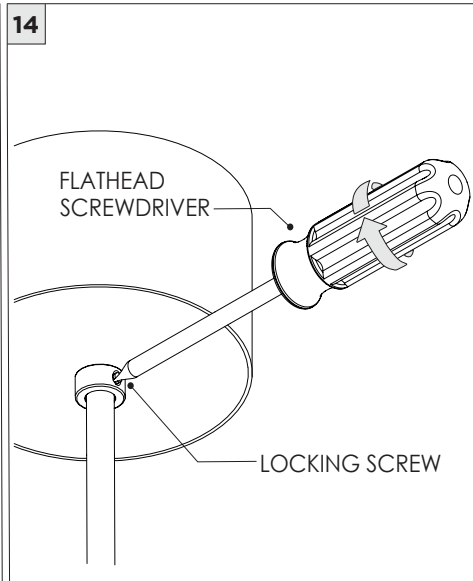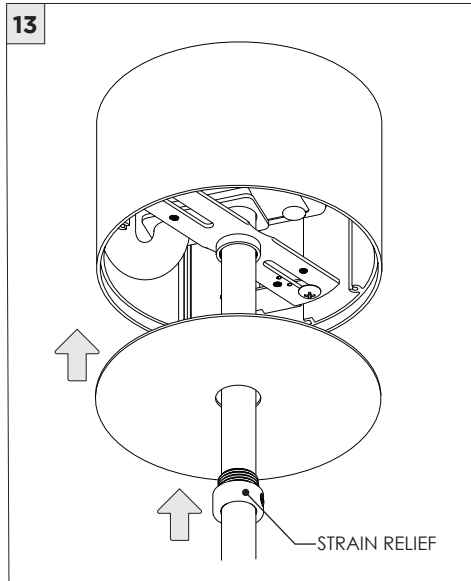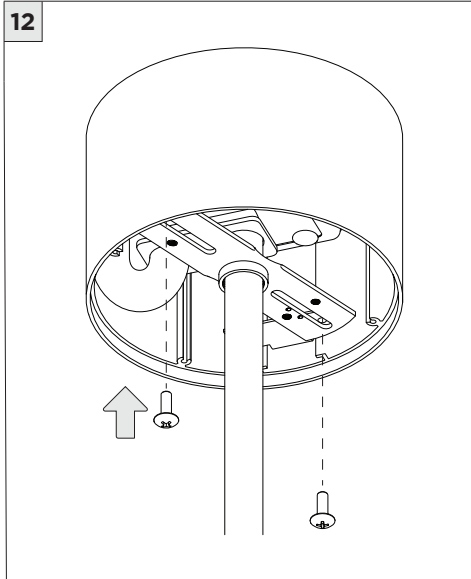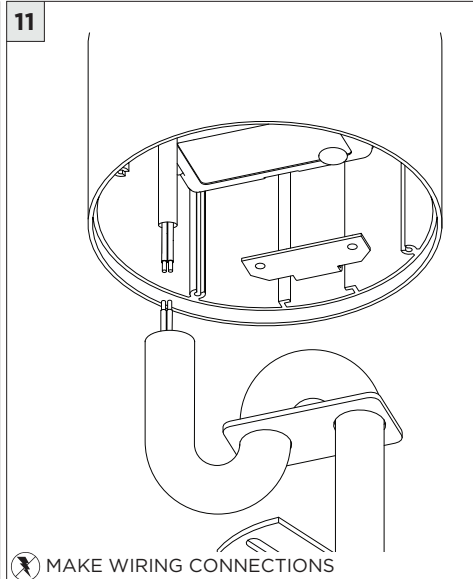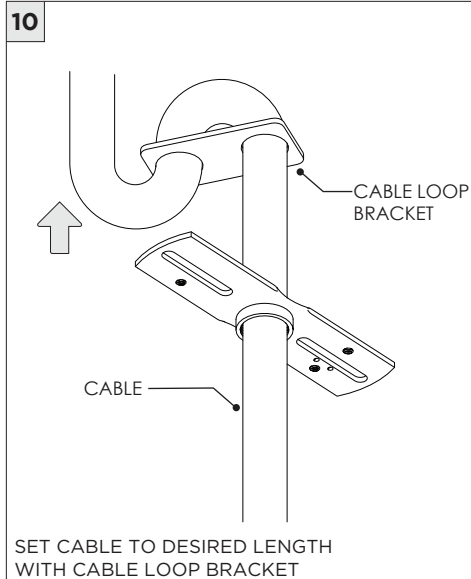


DRIVER SERVICING

1

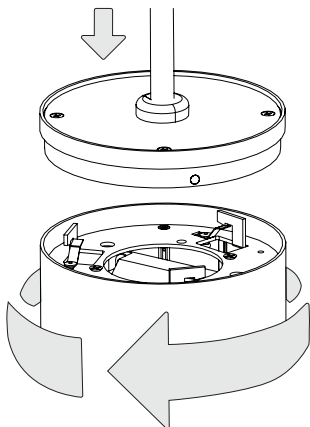


2

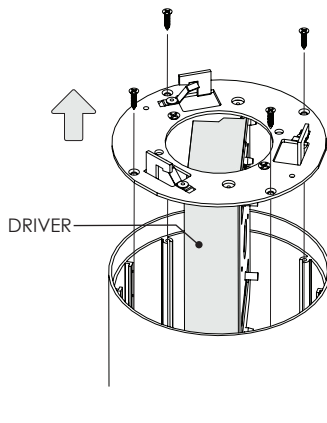


DRIVER SERVICING


1

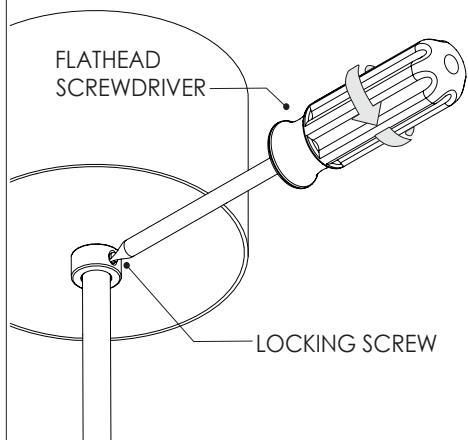


2

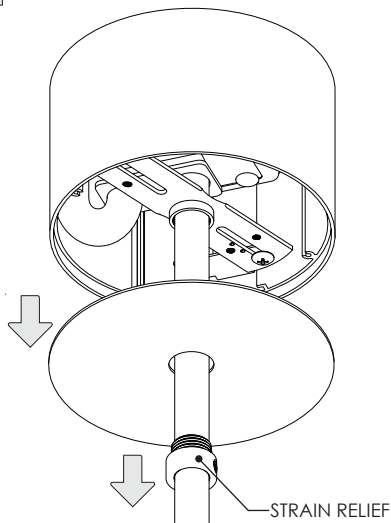

3

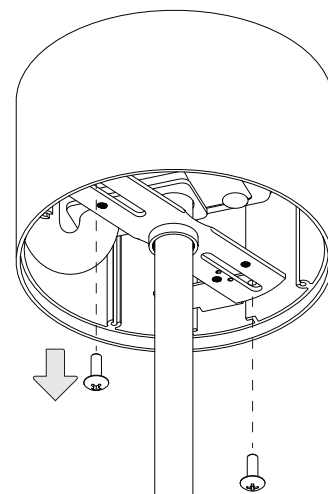


4

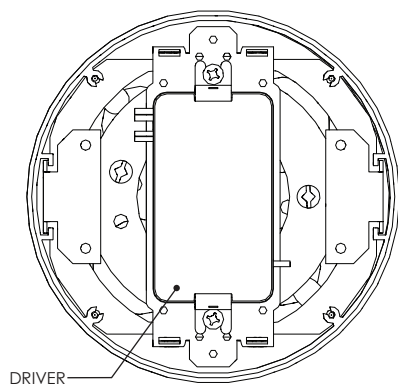


LED SERVICING

1

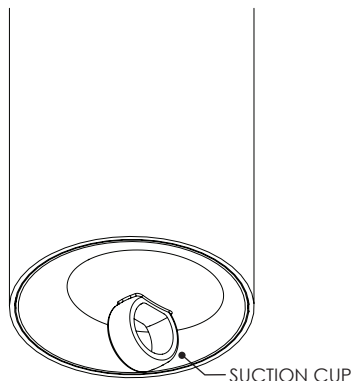


2

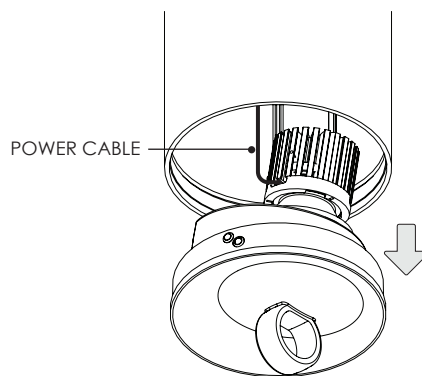


ENSURE TO DISCONNECT POWER CABLE


3

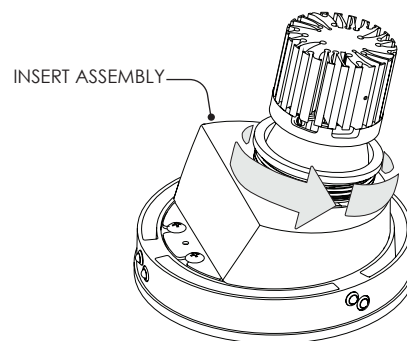


4 REPLACE LED ASSEMBLY

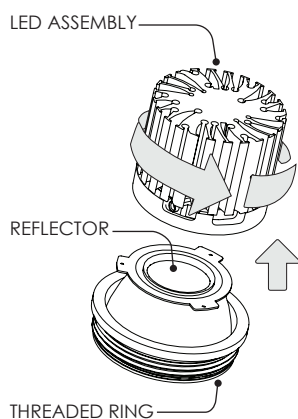

5

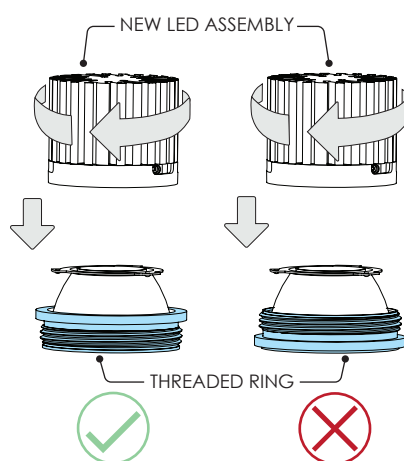


6

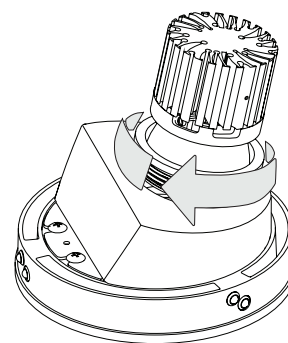


ENSURE THE HEAT SINK IS ALIGNED WITH INSERT ASSEMBLY AND FULLY TIGHTEN THE THREADED RING

7

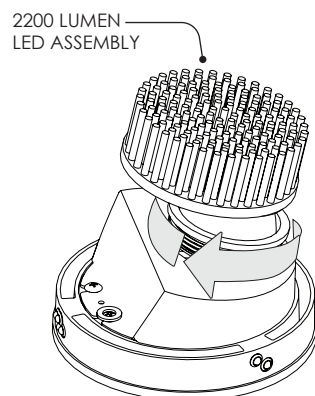


FOR 2200 LUMEN FIXTURES

7A

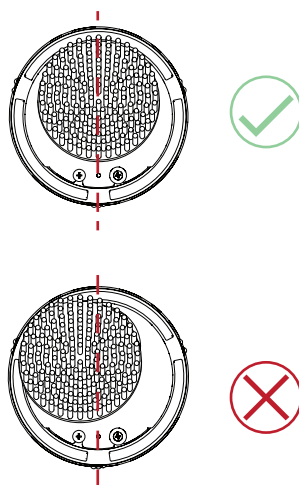

8

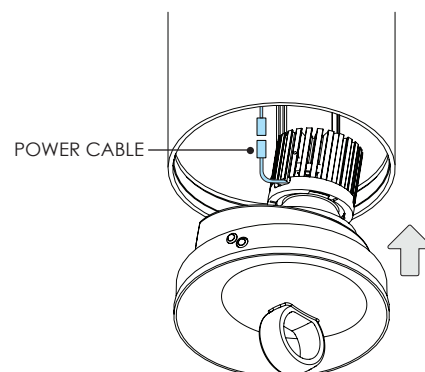

EXACT LED MODEL MAY VARY