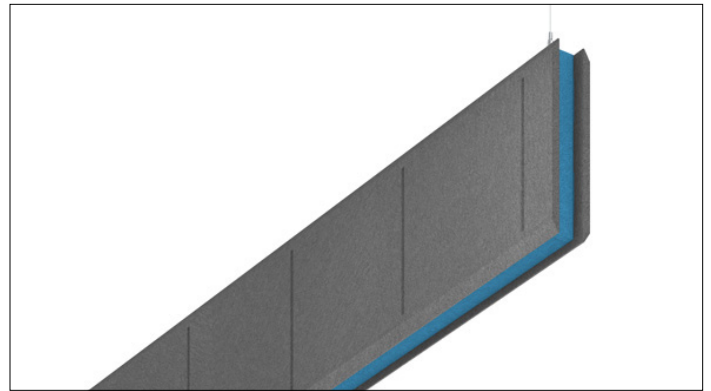




3G-1PLA-AC

1.5" ACOUSTIC PENDANT
BAFFLE ONLY



Acoustic body and edge fabricated in 1/2" thick acoustic felt with 20 color options
1.5" aperture non illuminated pendant
Available in 4', 5', 6', and 8' lengths with 12" or 16" height options

PROJECT:				TYPE:			
CATALOG#:				DATE:		QTY:	


CAT. NO	FIXTURE HEIGHT	ACOUSTIC COLOR OPTIONS	ACOUSTIC BODY	ACOUSTIC EDGE
3G-1PLA-AC	12H - 12" HEIGHT 16H - 16" HEIGHT	1CL - SINGLE COLOR (SAME COLOR FOR BODY AND EDGE) 2CL - DUAL COLOR (DIFFERENT COLORS FOR BODY AND EDGE)	BXX - (SEE PAGE 2 FOR ALL COLORS)	EXX - (SEE PAGE 2 FOR ALL COLORS) *Option 2CL to be selected with this option

CABLE LENGTH	RUN TYPE
60 - 60" 120 - 120"	S(4') - 4' S(5') - 5' S(6') - 6' S(8') - 8'

SINGLE COLOR OPTION

SPECIFY ONE COLOR FOR THE ACOUSTIC BODY AND EDGE

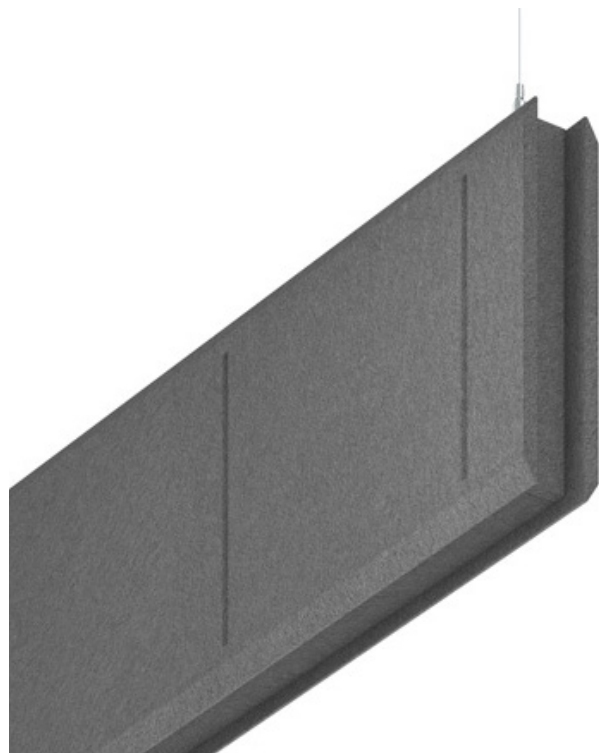Acoustic Body and Edge shown with "BRG" (Rhino grey)




DUAL COLOR OPTION










SPECIFY TWO DIFFERENT COLORS FOR THE ACOUSTIC BODY AND EDGE

Acoustic Body shown with "BRG" (Rhino grey)





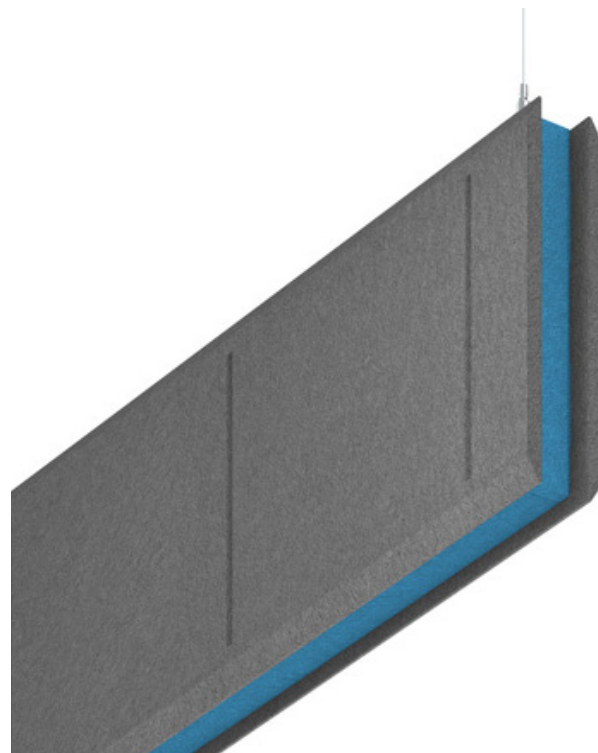
Acoustic Edge shown with "ETU" (Turquoise)



ACOUSTIC BODY COLORS

									
BSG Steel gray	BRG Rhino gray	BCH Charcoal	BBK Black	BSW Snow white	BBE Beige	BLM Light marble	BAG Ash gray	BDM Dark marble	BFG Forest green
									
BAP Apple green	BNG Neon green	BEG Emerald green	BYE Yellow	BOR Orange	BRE Red	BGP Grape prune	BAB Admiral blue	BSB Sky blue	BTU Turquoise

OPTIONAL EDGE COLORS


									
ERG Rhino gray	EBK Black	ESW Snow white	EAG Ash gray	EAP Apple Green	EYE Yellow	EOR Orange	ERE Red	EAB Admiral blue	ETU Turquoise

NOTE:

Acoustic felt colors may vary slightly due to dye-lot variation. Colors shown digitally may also vary by screen. Physical samples should be used for color reference

SOUND WAVE IN A GIVEN SPACE

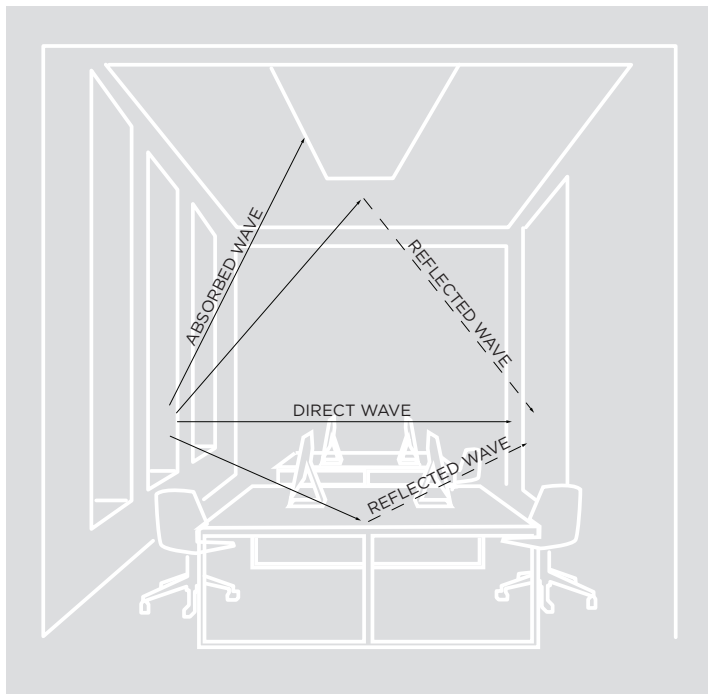When a sound wave is emitted from its source, it propels in all directions. The sound carries in a space unless it comes across an obstruction or an absorbing element such as carpeting, or upholstery. Harder materials will enable sound waves to reverberate in the space for a longer period of time. A sound can be direct like a face to face conversation and it can be reflected back from a hard surface.



REVERBERATION

The persistence of sound after it has been stopped due to multiple reflections from surfaces within a closed space



T60 : REVERBERATION TIME

The time it takes for a sound to decay by 60 dB once the source of sound has stopped. Reverberation time is the basic acoustical property of a room which depends only on its dimensions and the absorptive properties of its surfaces and contents. An acceptable value for class rooms and libraries ranges between 0.5-0.9 seconds. A suitable value for open offices and conference rooms ranges between 0.7 and 1.25 seconds



NRC - NOISE ABSORPTION COEFFICIENT

The Noise Reduction Coefficient is a scalar representation of the amount of sound energy absorbed upon striking a particular surface. an NRC of 0 indicates perfect reflection. an NRC of 1 indicates perfect absorption. Higher number equals better performance.



SABIN

A unit of sound absorption based on one square foot of material. Products with higher Sabin values provide more sound absorption.

SABIN COUNT

The sum total of the absorption coefficients in a room. Stronger NRC values will deliver higher Sabin counts.

ACOUSTIC PERFORMANCE

FIXTURE LENGTH	FIXTURE HEIGHT	SABINS PER OBJECT @ A GIVEN FREQUENCY				
		250hz	500hz	1000hz	2000hz	AVERAGE
4FT	12IN	2.30	4.47	7.29	8.50	5.64
4FT	16IN	3.38	5.74	9.05	10.52	7.17
5FT	12IN	2.88	5.58	9.11	10.62	7.05
5FT	16IN	4.22	7.17	11.31	13.14	8.96
6FT	12IN	3.45	6.70	10.94	12.74	8.46
6FT	16IN	5.06	8.60	13.58	15.77	10.75
8FT	12IN	4.60	8.93	14.58	16.99	11.28
8FT	16IN	6.75	11.47	18.10	21.03	14.34

ACOUSTIC HOUSING

Acoustic body and edge fabricated in 1/2" thick acoustic felt
Acoustic NRC value up to 0.9 (see tests results for more details)
Produced with recycled polyester fiber and +/- 60% from recycled water bottles
Material is 100% recyclable
0% VOC's
Fire rating ASTM E-84 Class A / CAN ULC S102

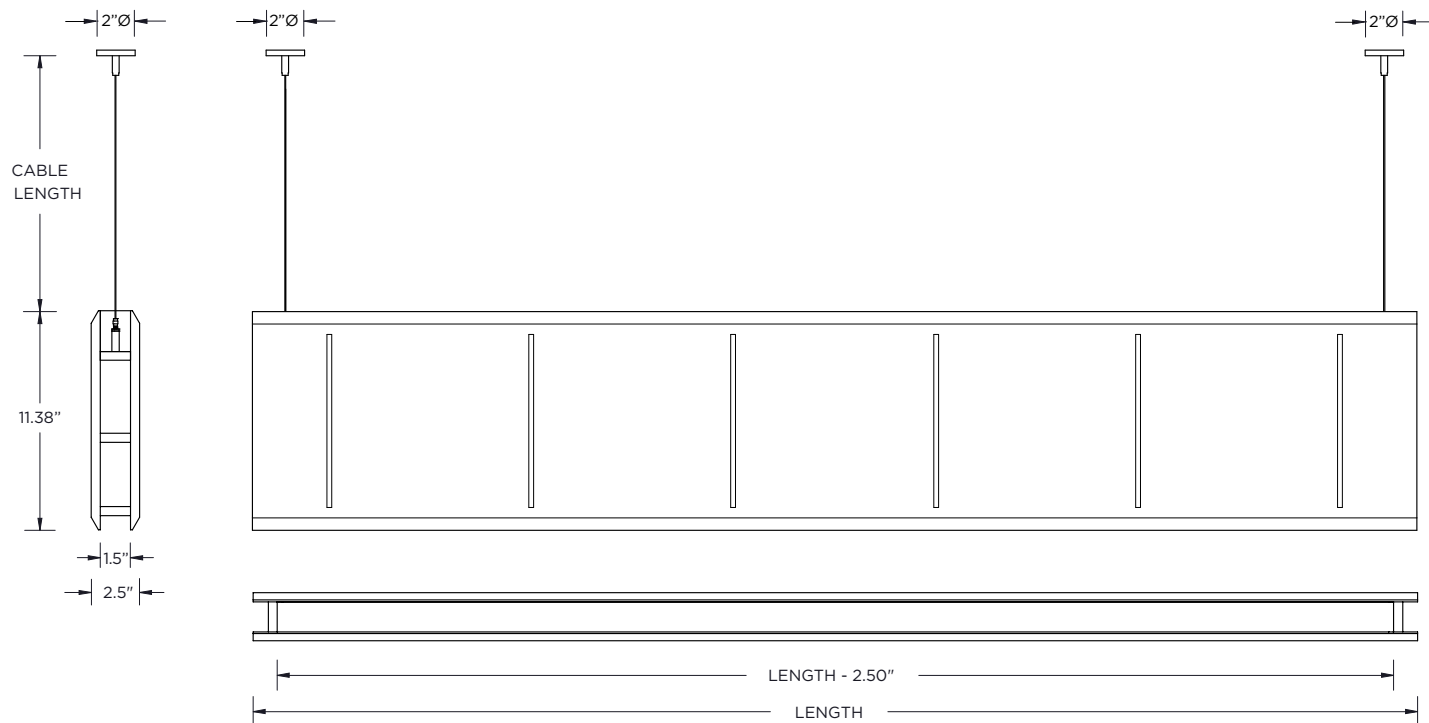
LISTING

ETL listed and conforms to UL1598 standard. Certified to CSA22.2 NO.250.0. Suitable for dry locations


WARRANTY


1 Year Warranty for defects in material and workmanship under normal use

12IN HEIGHT





16IN HEIGHT

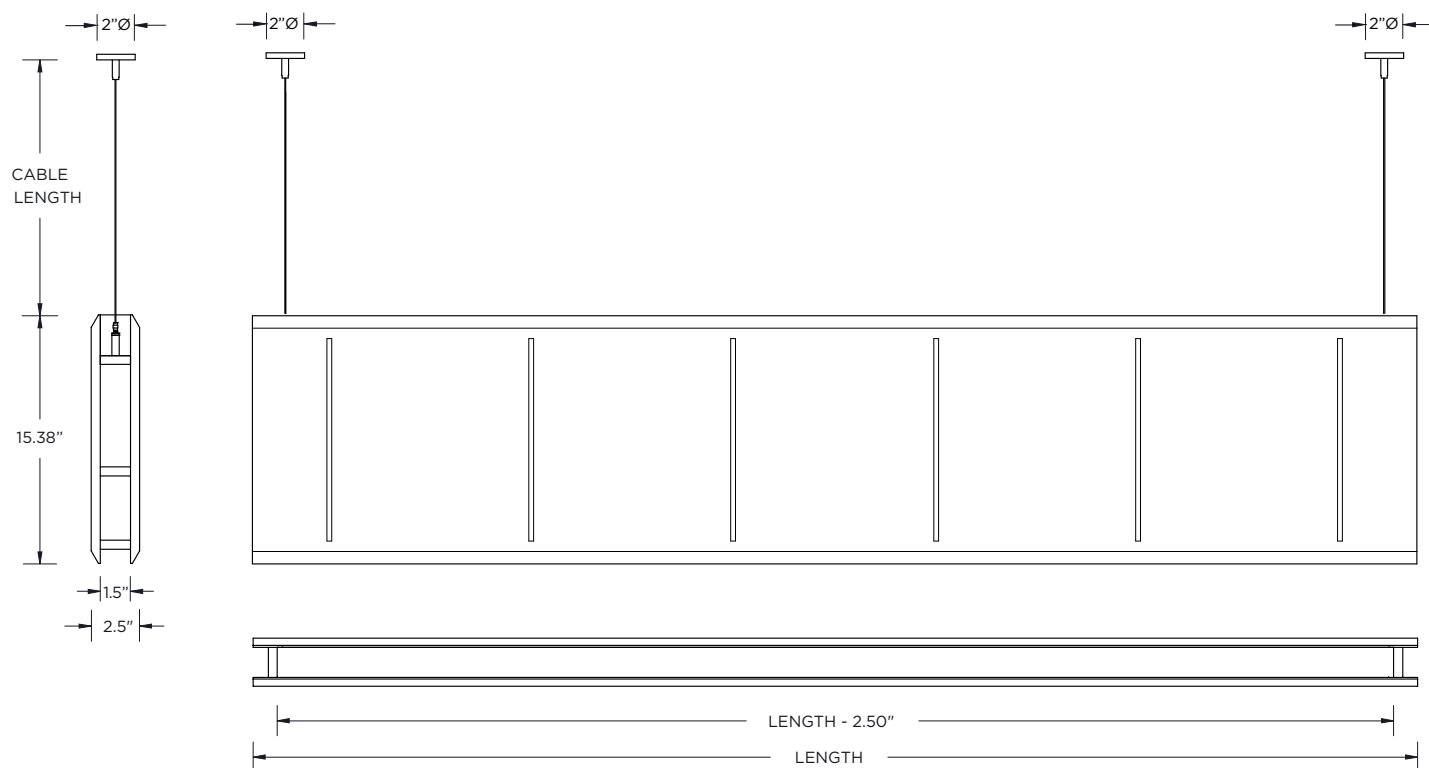

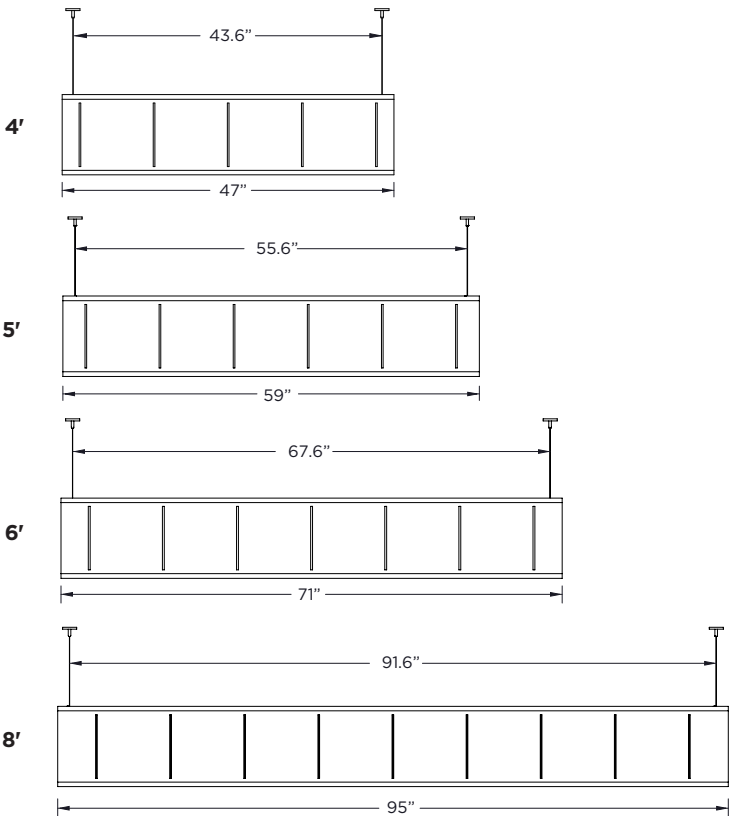

MOUNTING DETAILS

Adjustable aircraft cable suspension with locking fasteners (60" length standard)
All mounting canopies provided in white finish as standard
Suitable for various architectural ceilings (see mounting details)
Fixture weight: 0.75 lbs/ft

DRYWALL	GRID
	

Declare® is a product transparency program administered by the International Living Future Institute (ILFI), providing standardized disclosure of product ingredients, manufacturing location, service life, end-of-life pathways, and Living Building Challenge compliance status.

PRODUCT FAMILY COVERAGE — LINEAR SYSTEMS

Linear luminaires for suspended, surface, and recessed applications, including perimeter conditions, wall grazing, acoustic lighting, acoustic integration, low-glare multicell runs, and linear systems with integrated downlight modules. Available with flush and drop lens options, multiple distributions including batwing and asymmetric, and a range of lengths and output levels.

LBC RED LIST FREE

This product family carries a Declare® designation of LBC Red List Free, the highest designation within the Declare program. Products with this designation contain no intentionally added Red List chemicals above applicable Declare reporting thresholds and have been evaluated against the Living Building Challenge Red List.



BUILDING CERTIFICATION PROGRAMS

Material transparency documentation is increasingly requested as part of building certification programs and owner standards. Declare labels may be used as supporting documentation for project teams pursuing:

- Living Building Challenge (LBC)
- WELL Building Standard™ v1
- WELL Building Standard™ v2
- LEED®
- Other material disclosure and material health initiatives

Project certification requirements are determined at the building level and should be evaluated by the project team.

Declare.

Linear Systems 3G Lighting

Final Assembly: Woodbridge, Ontario, Canada

Life Expectancy: 7+ Year(s)

End of Life Options: Recyclable (95%), Landfill (5%)

Ingredients:

Aluminum UNS A96063; Steel, cold roll UNS G10080; 2-Propenoic acid, 2-methyl-, methyl ester, polymer with ethyl 2-propenoate; Copper UNS C11000; 2-Propenoic acid, butyl ester, polymer with ethenylbenzene and 2-propenenitrile; Carbonic dichloride, polymer with 4,4'-(1-methylethylidene)bis[phenol]; Polyethylene Terephthalate; Pulp, cellulose; Aluminum diethylphosphinate; Benzene, ethenyl-, polymer with 1,3-butadiene, hydrogenated; **Distillates (petroleum), hydrotreated heavy naphthenic**; Polypropylene; Paper; Tin, Organic; Starch, base-hydrolyzed, borated; 2,4,8,10-Tetraoxa-3,9-diphosphaspiro[5.5]undecane, 3,9-bis[2,4-bis(1,1-dimethylethyl)phenoxy]-; Vinyl acetate; Phosphorus; Iron; Zinc; 1,3-Propanediol, 2-ethyl-2-(hydroxymethyl)-

Living Building Challenge Criteria: Compliant

I-13 Red List:

- | | |
|---|-----------------------------|
| ☒ LBC Red List Free | % Disclosed: 100% at 100ppm |
| ☐ LBC Red List Approved | VOC Content: Not Applicable |
| ☐ Declared | |

I-10 Interior Performance: Not Applicable

I-14 Responsible Sourcing: Not Applicable

XXX-XXXX

EXP. 01 JUN 2027

Original Issue Date: 2026

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare