


2" ROUND ADJUSTABLE DOWNLIGHT TRIM




i THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS

RMD - REMODEL



LED INSERT




DRIVER ENCLOSURE




SUCTION CUP


NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)




LED INSERT



NEW CONSTRUCTION FRAME



BAR HANGERS




DRIVER ENCLOSURE




SUCTION CUP


NC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)



LED INSERT



NEW CONSTRUCTION HOUSING



BAR HANGERS



SUCTION CUP

INSTRUCTION KEY

INFORMATION



ADDITIONAL



ATTENTION



POWER ON



POWER OFF

INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
TURN OFF POWER DURING INSTALLATION OR SERVICING


RMD - REMODEL

1




FIXTURE TYPE	CEILING HOLE SIZE
DL20RA	Ø 2.625"

2

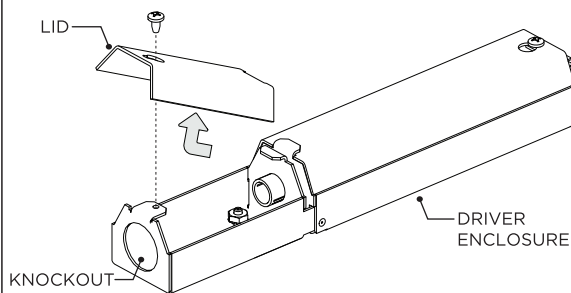

REMOVE LID AND KNOCKOUT FROM DRIVER ENCLOSURE

3

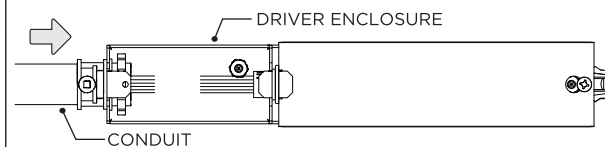


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)


CONNECT CONDUIT TO DRIVER ENCLOSURE AND MAKE WIRING CONNECTIONS

4




SECURE LID ONTO DRIVER ENCLOSURE AND INSERT INTO CEILING

5

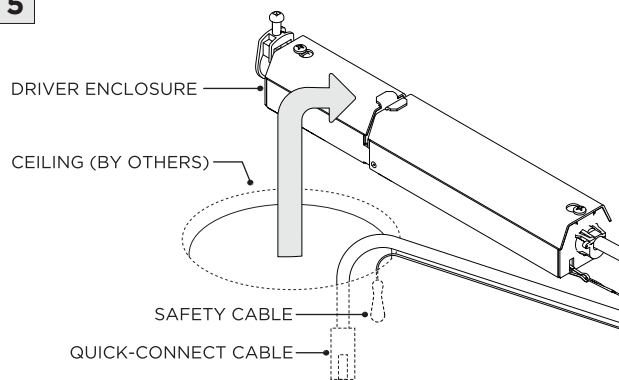


PLACE DRIVER ENCLOSURE ABOVE CEILING

6A

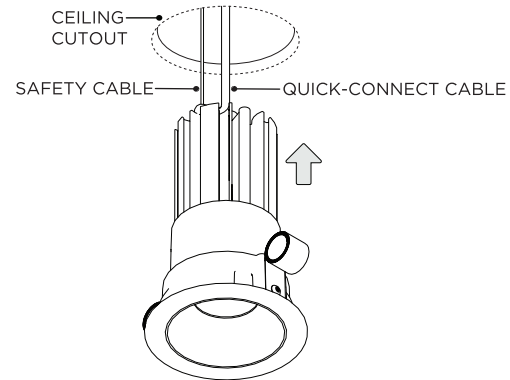


6B

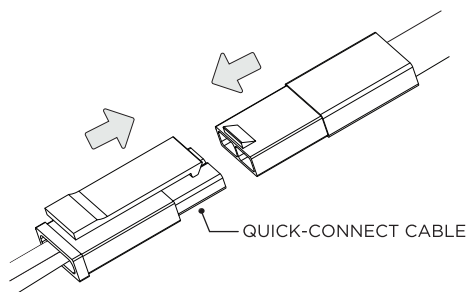


CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY

6C

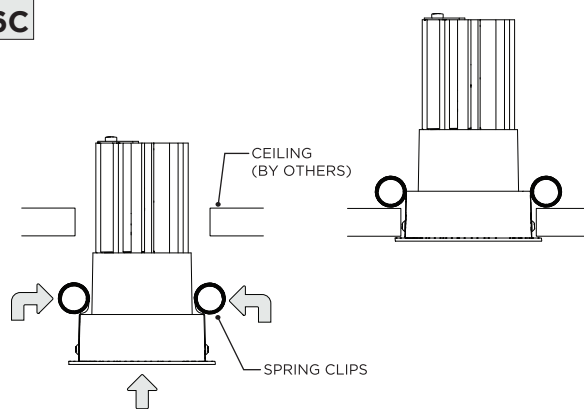


RMD - REMODEL WITH REMOTE DRIVER ENCLOSURE










1 REMOTE DRIVER WIRING

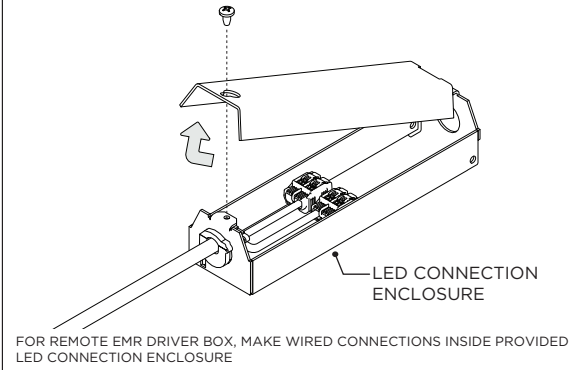










2

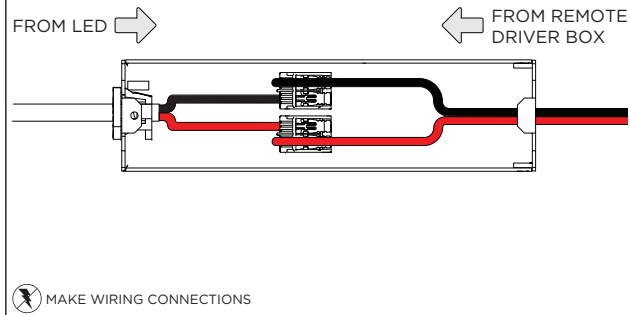

NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)

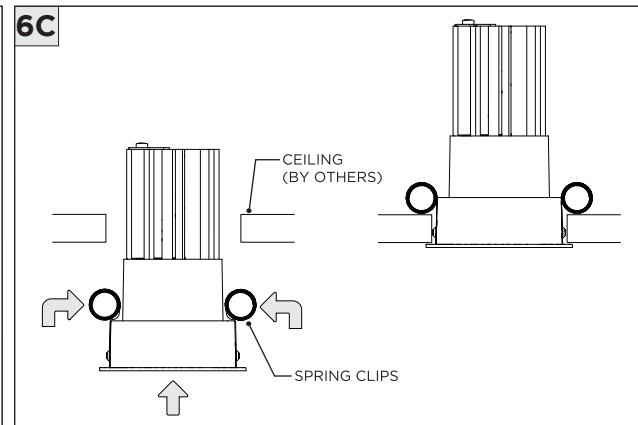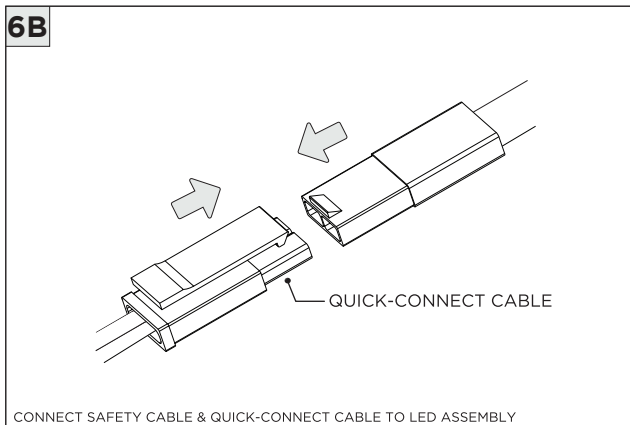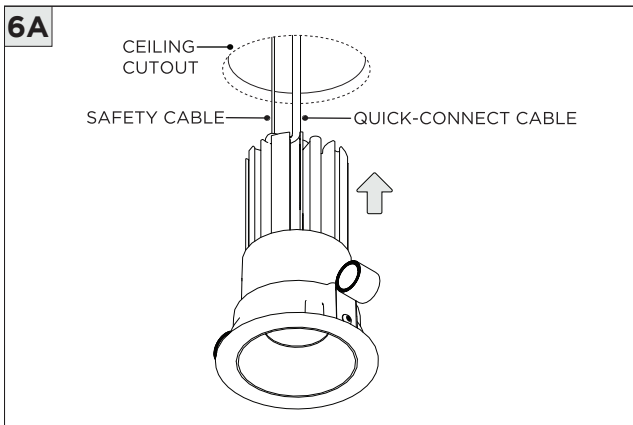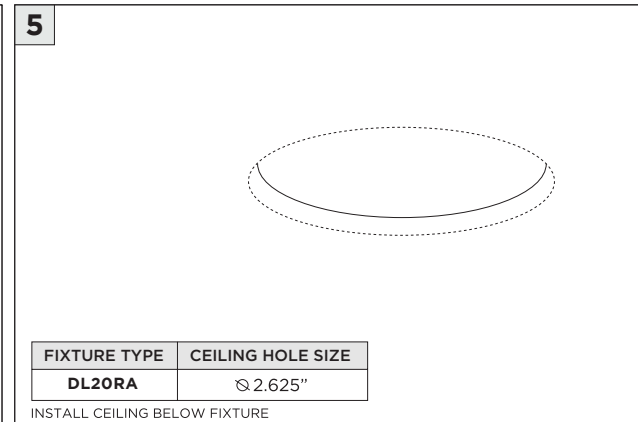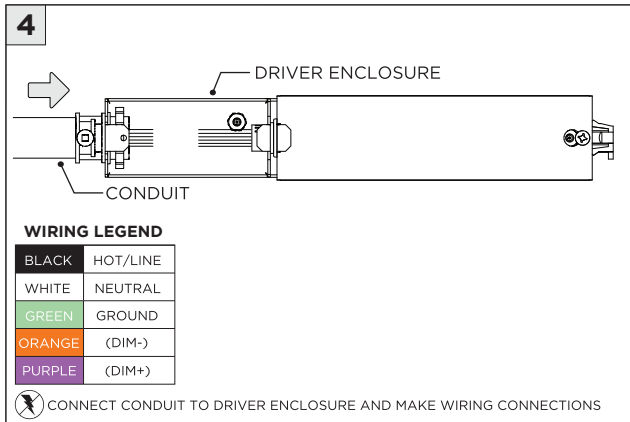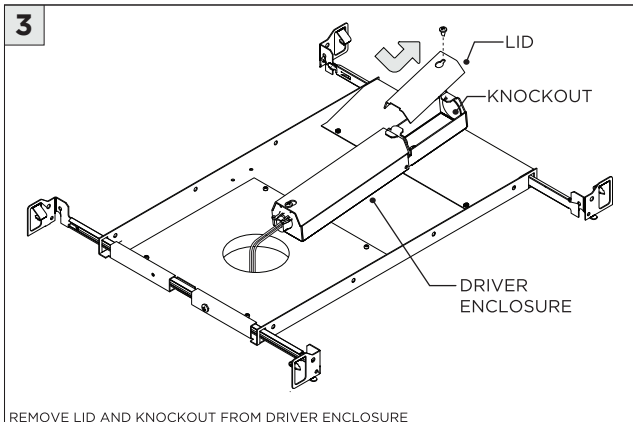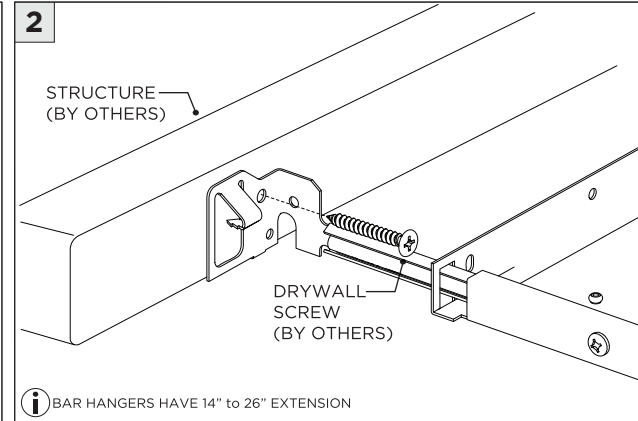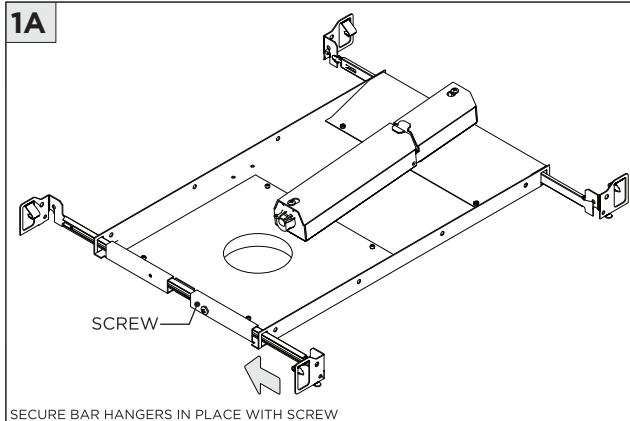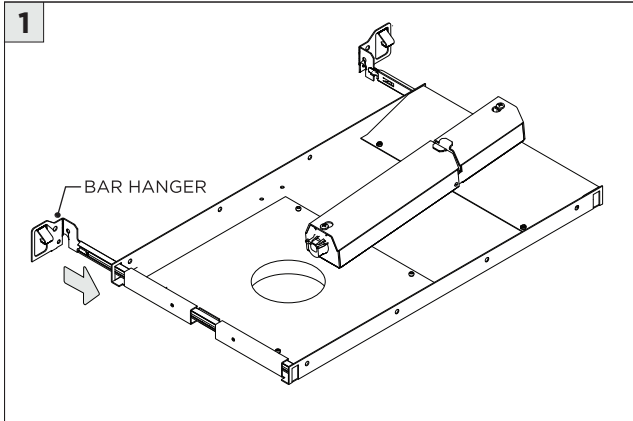


NC/IC - NEW CONSTRUCTION HOUSING (FOR NEW CONSTRUCTION ONLY)

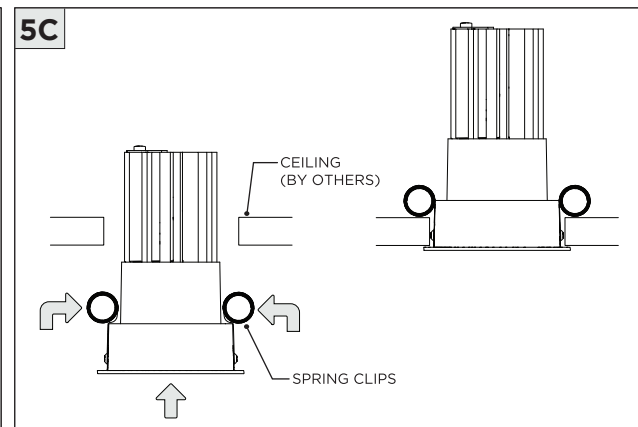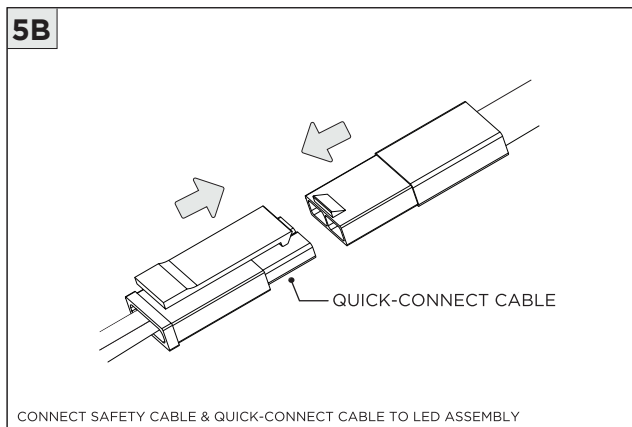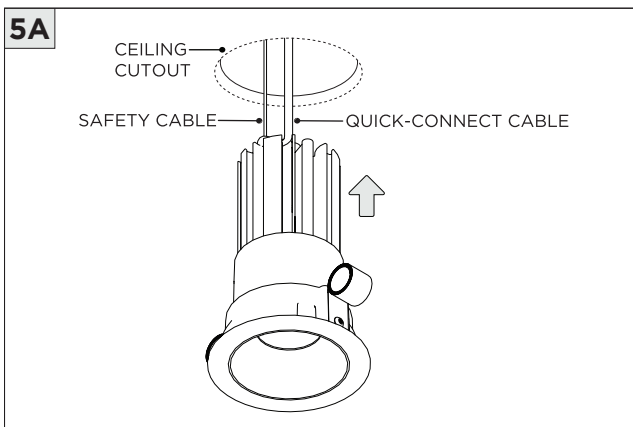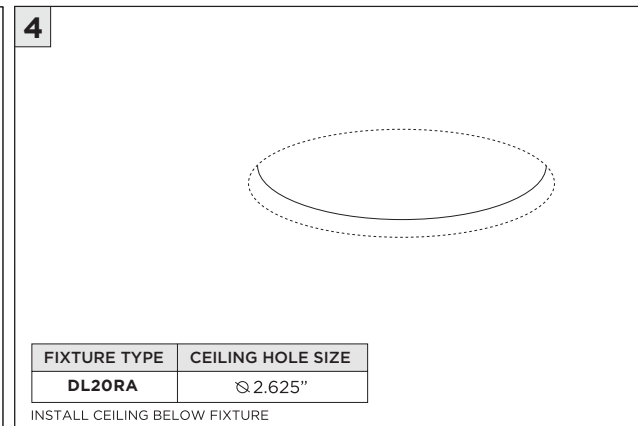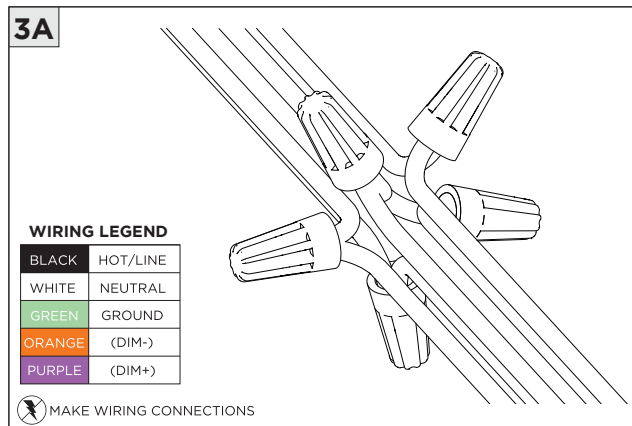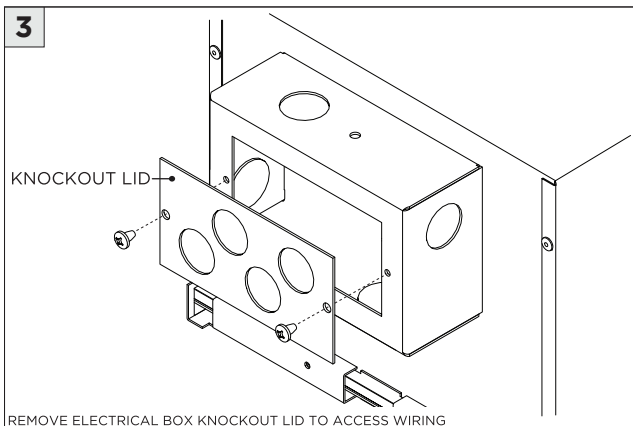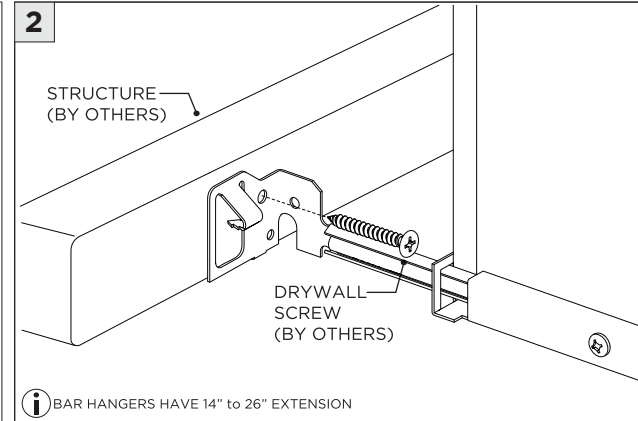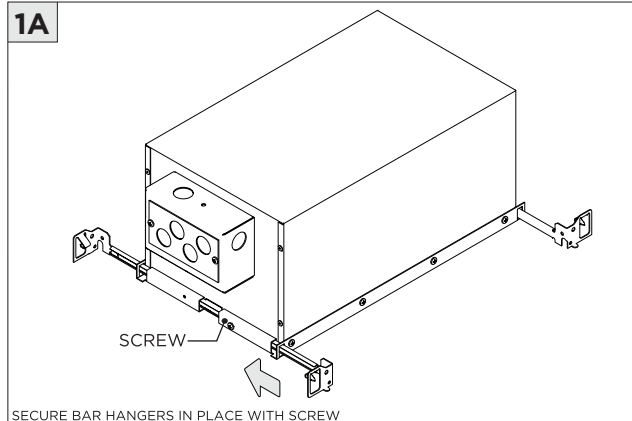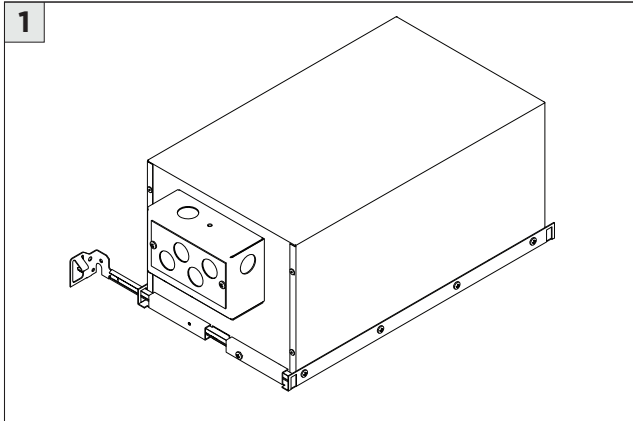


LED ADJUSTMENT

1

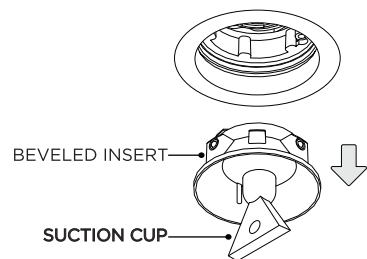


REMOVE BEVELED INSERT FROM CEILING WITH PROVIDED SUCTION CUP

2

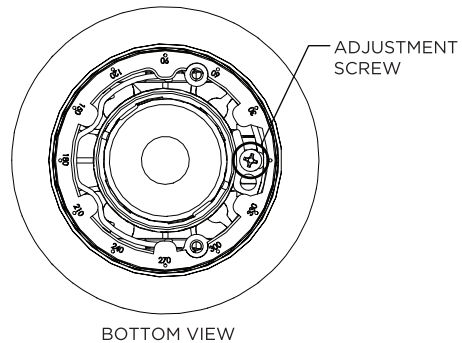


ROTATE SCREW TO ADJUST LED ANGLE


2A

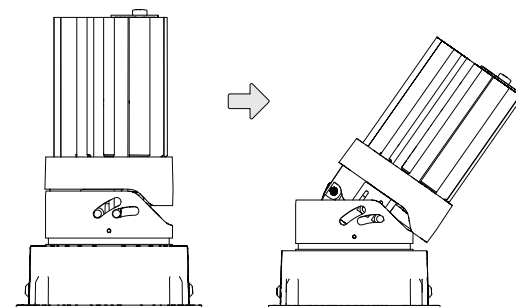



LED SERVICING

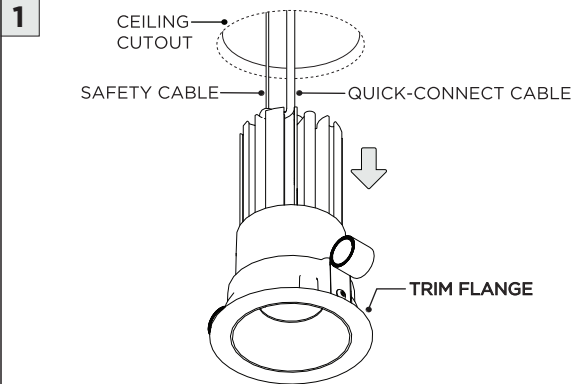

REMOVE LED ASSEMBLY FROM CEILING BY PULLING DOWN ON TRIM FLANGE

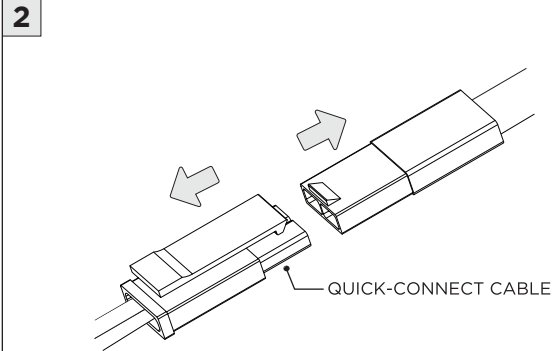


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

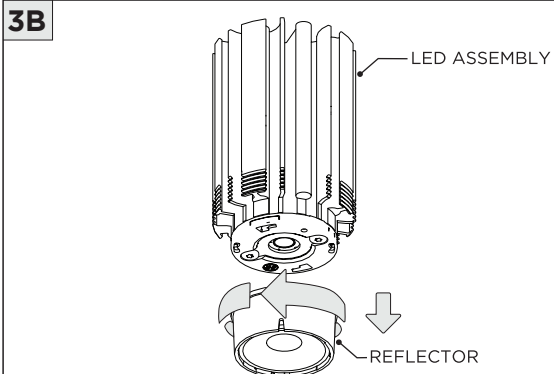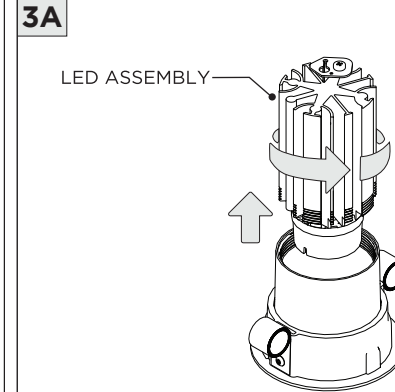

REMOVE REFLECTOR AND REPLACE LED ASSEMBLY


DRIVER SERVICING

1 RMD - REMODEL

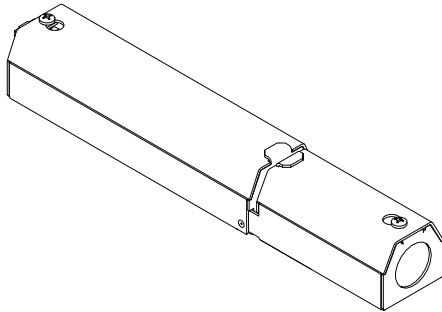


 DISCONNECT POWER BEFORE SERVICING

2

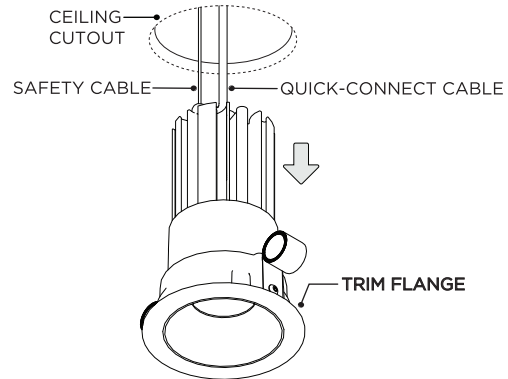


REMOVE LED ASSEMBLY FROM CEILING BY PULLING DOWN ON TRIM FLANGE

2A

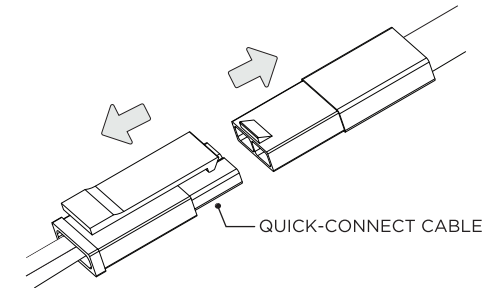


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3



DRIVER
ENCLOSURE


4

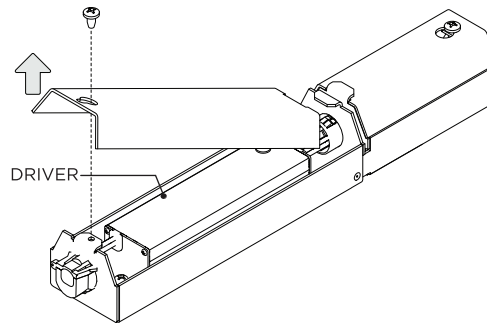

DRIVER


DRIVER SERVICING

1 NCF - NEW CONSTRUCTION FRAME

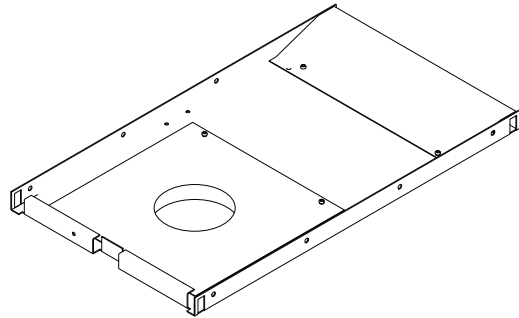


⚡ DISCONNECT POWER BEFORE SERVICING

2

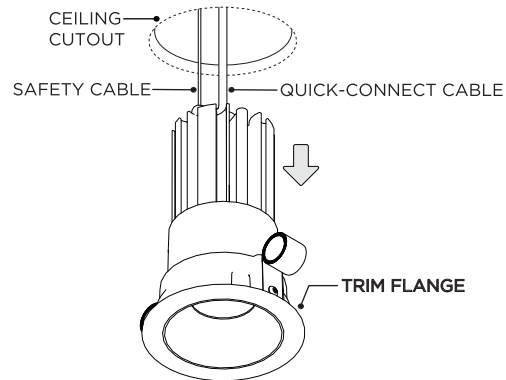


REMOVE BEVELED INSERT FROM CEILING BY PULLING DOWN ON TRIM FLANGE

2A

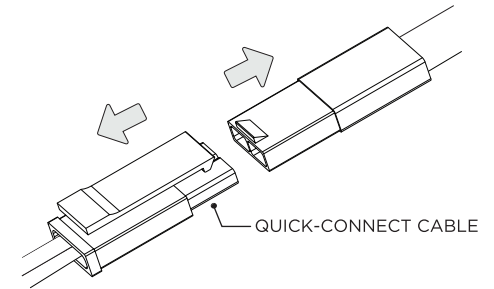


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

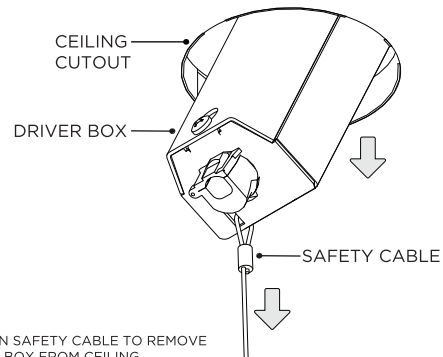


PULL ON SAFETY CABLE TO REMOVE
DRIVER BOX FROM CEILING

4

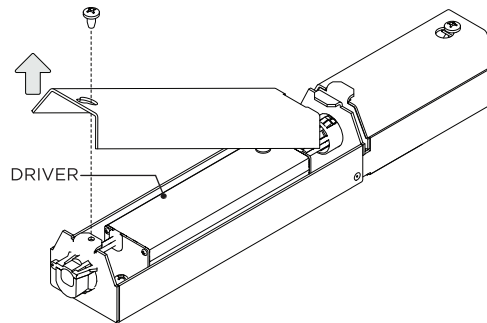


DRIVER SERVICING

1 NC - NEW CONSTRUCTION HOUSING

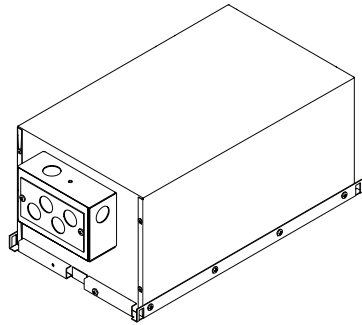


⚡ DISCONNECT POWER BEFORE SERVICING

2

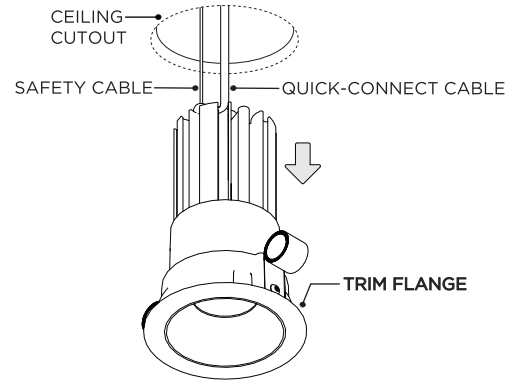


REMOVE BEVELED INSERT FROM CEILING BY PULLING DOWN ON TRIM FLANGE

2A

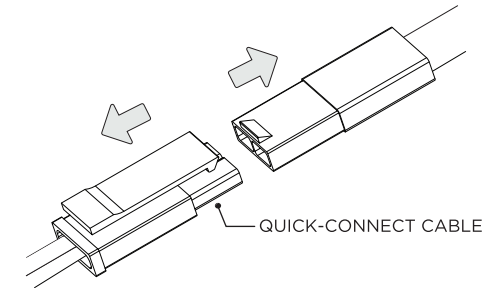


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

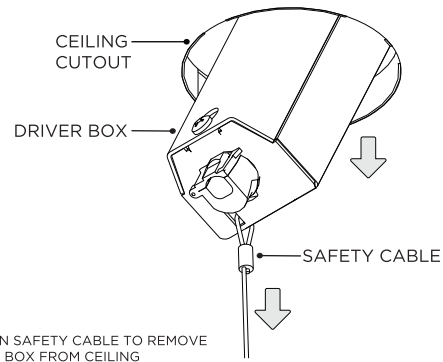

PULL ON SAFETY CABLE TO REMOVE DRIVER BOX FROM CEILING

4

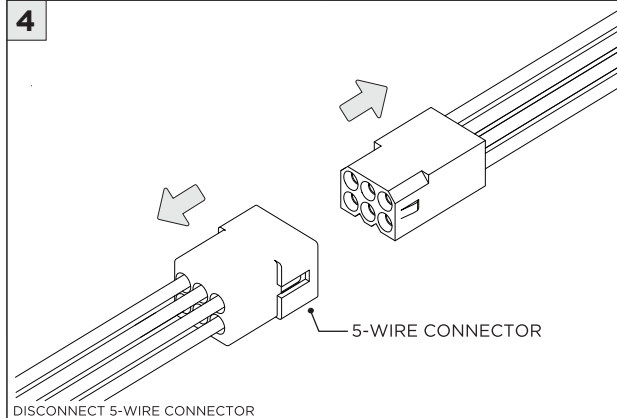

DISCONNECT 5-WIRE CONNECTOR

5

