2 LIGHT DOWNLIGHT, 3 LIGHT DOWNLIGHT
2” ADJUSTABLE DUAL,
2” ADJUSTABLE TRIPLE APERTURE


SQUARE MILLWORK




ⓘ THE IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

INCLUDED COMPONENTS


NCF - NEW CONSTRUCTION FRAME (FOR NEW CONSTRUCTION ONLY)




NEW CONSTRUCTION FRAME




BAR HANGERS (OPTIONAL)




DRIVER ENCLOSURES



BEVELED INSERT



LED ASSEMBLY



SUCTION CUP


INSTRUCTION KEY	INFORMATION
⚠ ADDITIONAL	INSTALLATION SHOULD ONLY BE PERFORMED BY A CERTIFIED ELECTRICIAN
ⓘ ATTENTION	REFER TO LOCAL/NATIONAL CODES FOR PROPER INSTALLATION
POWER ON	FAILURE TO FOLLOW INSTALLATION INSTRUCTION MAY VOID THE WARRANTY
POWER OFF	DO NOT TOUCH LEDS. LEDS MUST BE PROTECTED FROM MECHANICAL STRESS OR DEBRIS
	TURN OFF POWER DURING INSTALLATION OR SERVICING

3G LIGHTING


2 LIGHT DOWNLIGHT, 3 LIGHT DOWNLIGHT
2" ADJUSTABLE DUAL, 2" ADJUSTABLE TRIPLE APERTURE
SQUARE MILLWORK

INSTALLATION INSTRUCTIONS

1 BAR HANGER INSTALLATION
(IF SUPPLIED BY 3G)

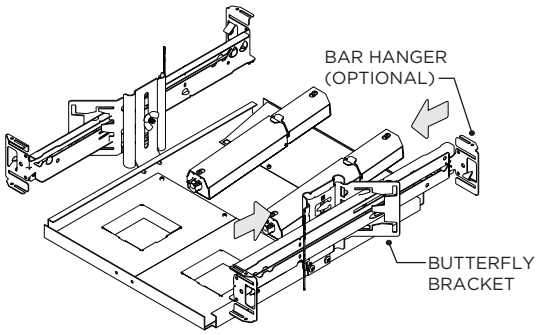


2

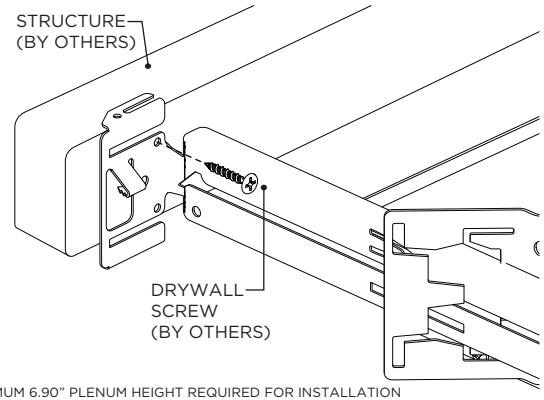


MINIMUM 6.90" PLENUM HEIGHT REQUIRED FOR INSTALLATION

3 OTHER BAR HANGER INSTALLATION
(NOT PROVIDED BY 3G)

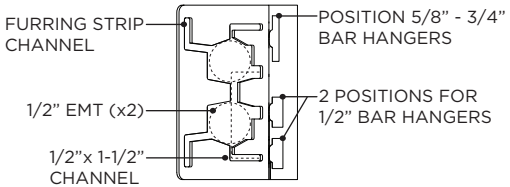


BUTTERFLY BRACKET
SIDE VIEW

4

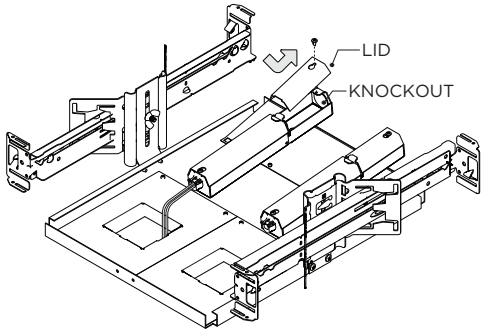

REMOVE LID AND KNOCKOUT FROM DRIVER ENCLOSURE

5

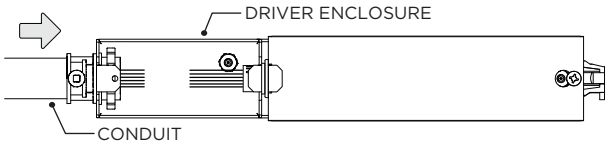


WIRING LEGEND

BLACK	HOT/LINE
WHITE	NEUTRAL
GREEN	GROUND
ORANGE	(DIM-)
PURPLE	(DIM+)

CONNECT CONDUIT TO DRIVER ENCLOSURE AND MAKE WIRING CONNECTIONS


6 CEILING CUTOUT

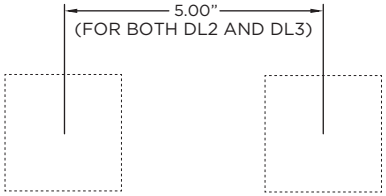


FIXTURE TYPE	CEILING HOLE SIZE
DL20RF	2.375" x 2.375"

INSTALL CEILING BELOW FIXTURE

7

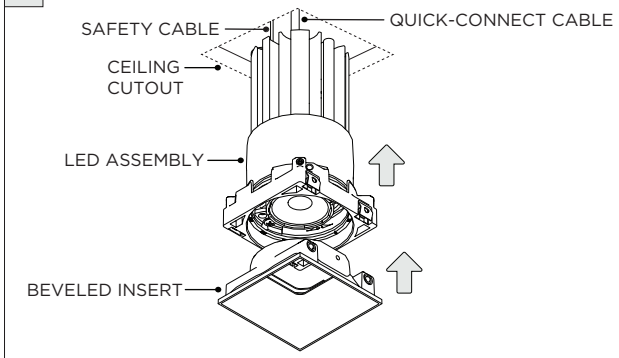


7A

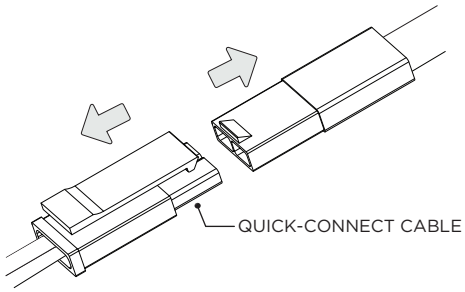

CONNECT SAFETY CABLE & QUICK-CONNECT CABLE TO LED ASSEMBLY


RMD - REMODEL WITH REMOTE DRIVER ENCLOSURE

1 REMOTE DRIVER WIRING

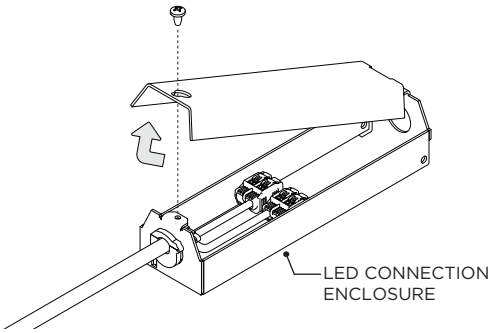

FOR REMOTE EMR DRIVER BOX, MAKE WIRED CONNECTIONS INSIDE PROVIDED LED CONNECTION ENCLOSURE


2

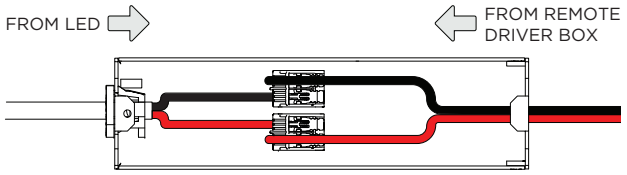

MAKE WIRING CONNECTIONS


LED ADJUSTMENT

1

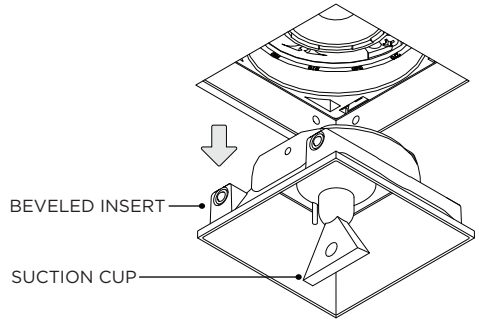

REMOVE BEVELED INSERT FROM CEILING WITH PROVIDED SUCTION CUP


2

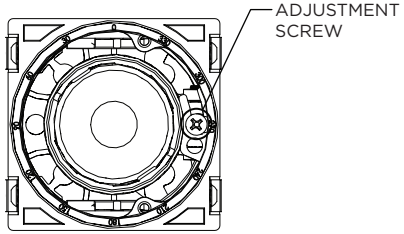

BOTTOM VIEW


ROTATE SCREW TO ADJUST LED ANGLE

2A

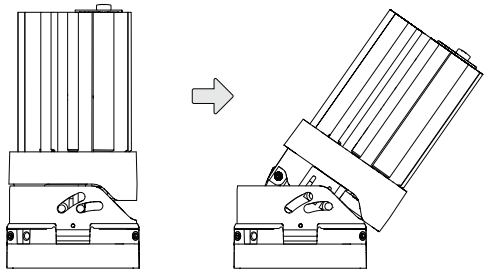


LED SERVICING

1

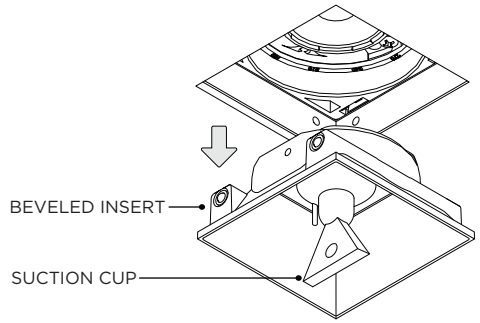


REMOVE BEVELED INSERT FROM CEILING WITH PROVIDED SUCTION CUP

2

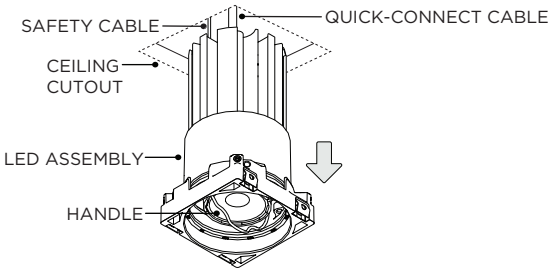


REMOVE LED ASSEMBLY FROM CEILING BY PULLING ON HANDLE

2A

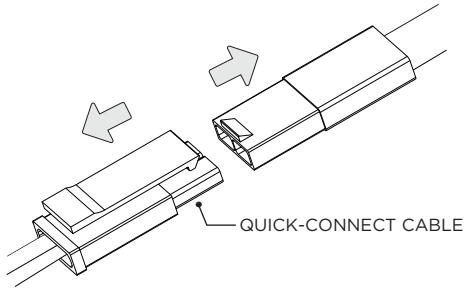


DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

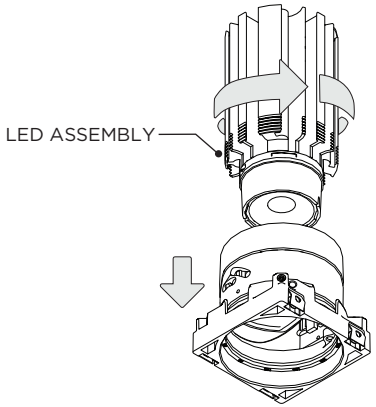


4

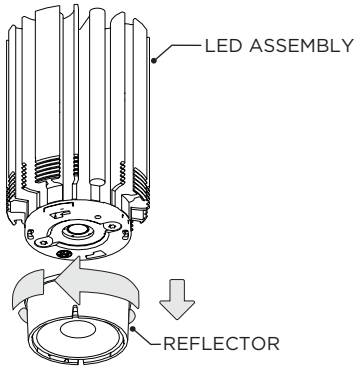

REMOVE REFLECTOR AND REPLACE LED ASSEMBLY


DRIVER SERVICING

1

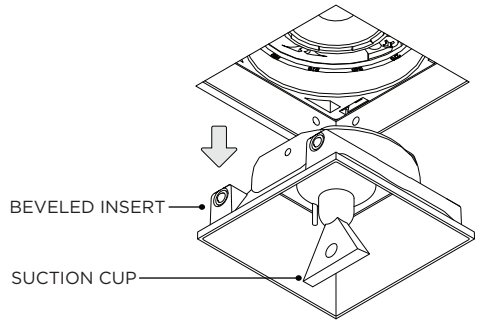


DISCONNECT POWER BEFORE SERVICING
REMOVE BEVELED INSERT FROM CEILING WITH PROVIDED SUCTION CUP

2

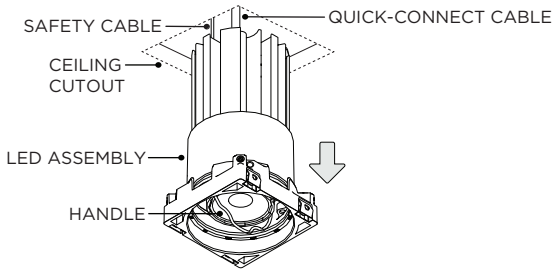


REMOVE LED ASSEMBLY FROM CEILING BY PULLING ON HANDLE

2A

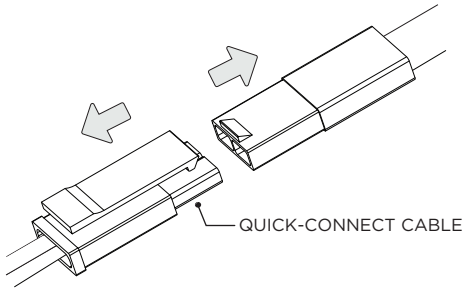

DISCONNECT SAFETY CABLE & QUICK-CONNECT CABLE FROM LED ASSEMBLY

3

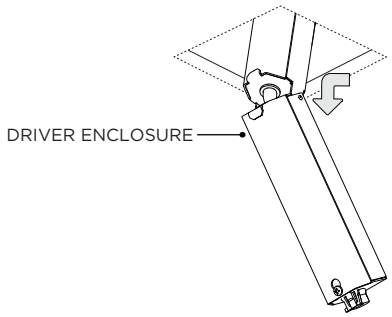

4

